
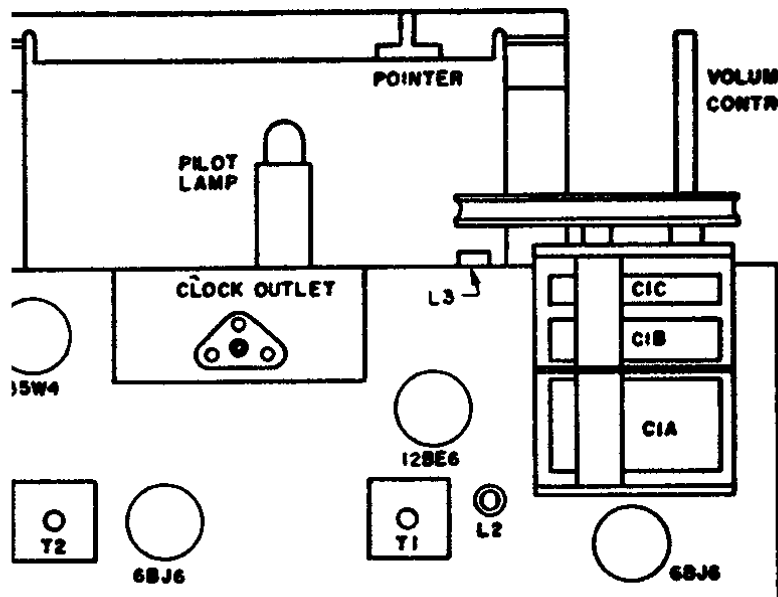


# Sears, Roebuck & Co. Chassis 528.40400, Catalog Nos. 6025 and 6026

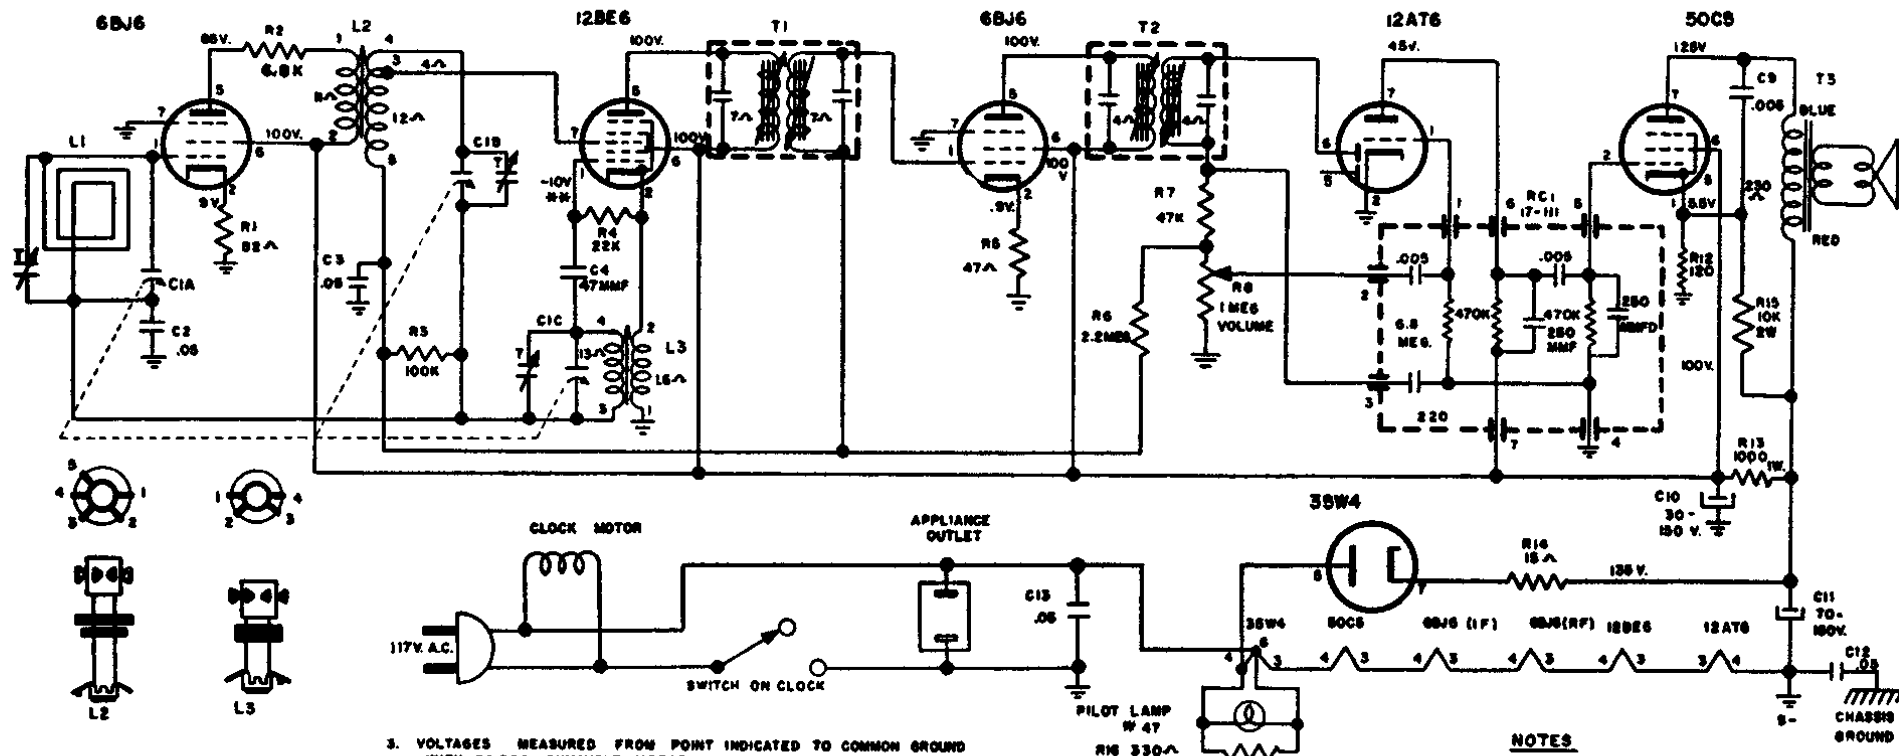

POSITION OF TUNER	GENERATOR FREQUENCY	DUMMY ANTENNA	GENERATOR CONNECTION	TRIMMER FUNCTION	TRIMMER ADJUSTMENT
Open	455 KC	0.1 mfd.	12BE6 pin 7	T2 (top & bottom)	2nd I.F.
Open	455 KC	0.1 mfd.	pin 7 12BE6	T1 (top & bottom)	1st I.F.
Open	1610 KC	0.1 mfd.	pin 7 12BE6	C1C (trimmer)	Oscillator
1400 KC	1400 KC	Hazeltine test loop		C1B (trimmer)	R.F.
1400 KC	1400 KC	Hazeltine test loop		C1A (trimmer)	Antenna