


MODEL 37B

MODEL 37B

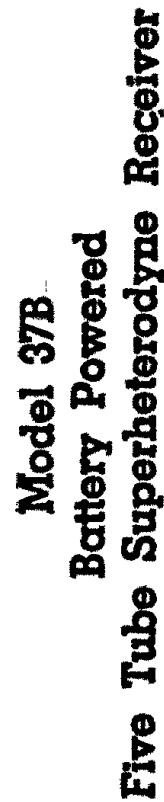

CONVENTIONAL ALIGNMENT - see special section.

Peak IF transformers at 465 KC. BROADCAST BAND - Dial and generator to 1720 KC, trim oscillator to maximum peak. Dial and generator to 1400 KC, adjust antenna trimmer to maximum peak. Dial and generator to 600 KC, pad oscillator circuit to maximum peak.

**Adjust antenna wave trap at 465 KC.**