


TRAV-LER Models 5180A, 5180B, 5180M


TUBE & TRIMMER LOCATION
MODEL-5180A

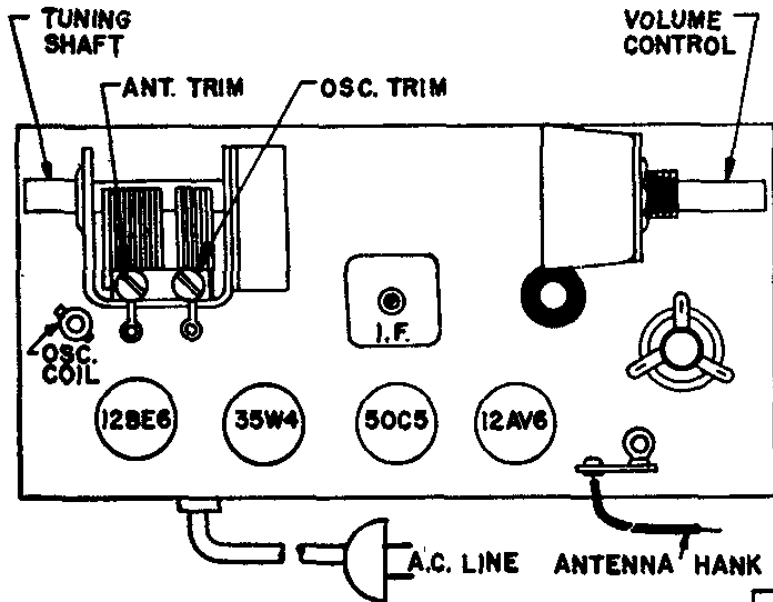

I.F. 455 KC.

Models 5180A, -B, -M

MODEL-5180A

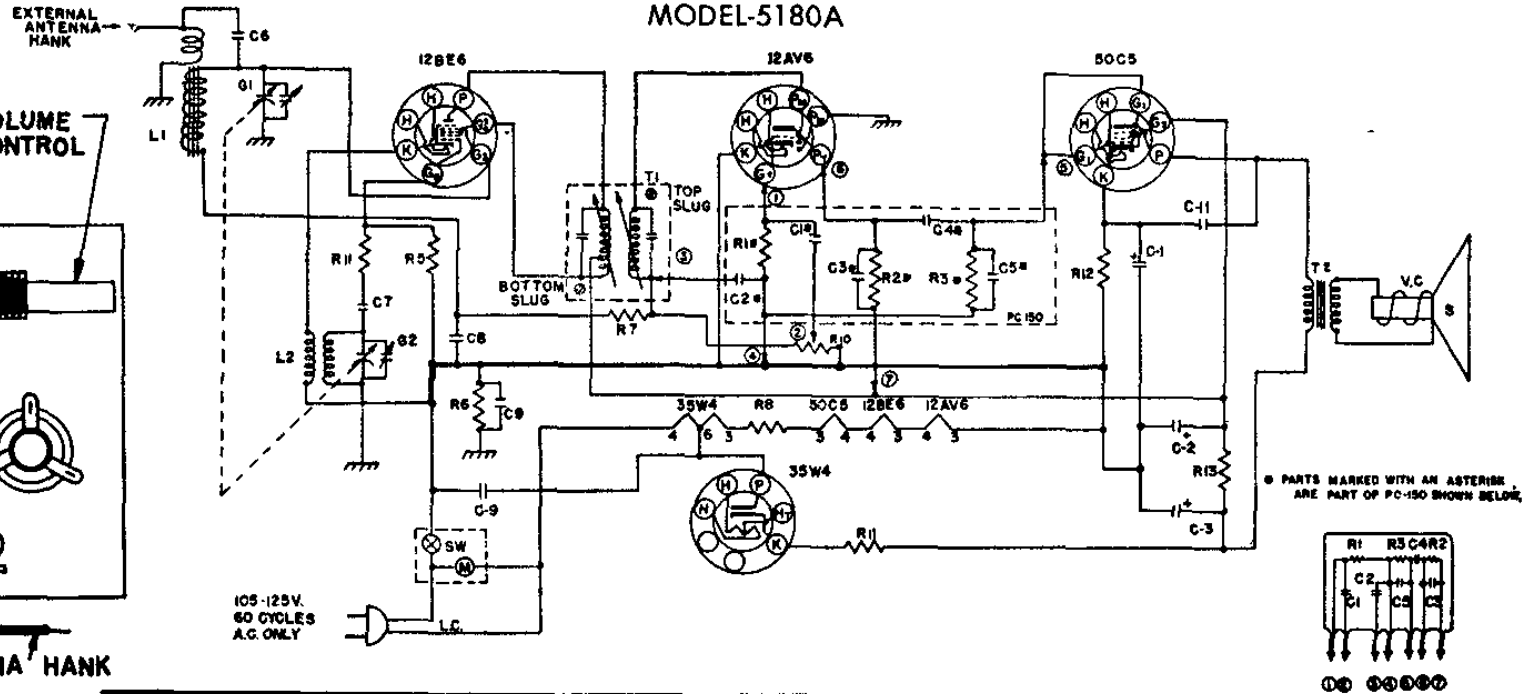

PART NO.	SYMBOL	DESCRIPTION	PART NO.	SYMBOL	DESCRIPTION
CG-21	C6	10MMF CERAMIC CONDENSER	IR-14	R-12	150 OHM 1/2 W. 20% CARBON RESISTOR
CG-12	C7	47MMF CERAMIC CONDENSER	IR-25	R-13	2200 OHM 1W 10% CARBON RESISTOR
PC-2	C8	.05MFD. PAPER CONDENSER	EC-28A	C-1	10MF-25WVDC
PC-5	C9	.05MFD. PAPER CONDENSER 400 V.	CO-1	C-2	20MF-150WVDC
CK-2	M	ELECTRIC CLOCK ASSEMBLY	CO-1	C-3	40MF-150WVDC
CG-3	C11	.005 MFD. CONDENSER	CG-12	G1	ANT. SECTION-WITH TRIMMER
MC-19	PC-150	COUPLATE	LA-6	G2	OSC. SECTION-WITH TRIMMER
IR-9	R-5	22K OHM 1/2 W. 20% CARBON RESISTOR	LO-20	L1	ANTENNA COIL
IR-20	R-6	220K OHM 1/2 W. 20% CARBON RESISTOR	LI-12	L2	OSCILLATOR COIL
IR-23	R-7	3.3MΩ OHM 1/2 W. 20% CARBON RESISTOR		T1	455 KC. TAPPED PRIMARY-IF COIL
IR-41	R-8	470NM 1W 10% CARBON RESISTOR		SW	SWITCH(PART OF CLOCK ASSEMBLY)
VC-49	R-10	1MEGΩ OHM VOLUME CONTROL	22B	T2	OUTPUT TRANSFORMER
IR-17	R-11	330OHM 1/2 W. 20% CARBON RESISTOR	SPK-OR	VC	VOICE COIL WINDING
			35	S	4" PM SPEAKER