


MODEL-7005

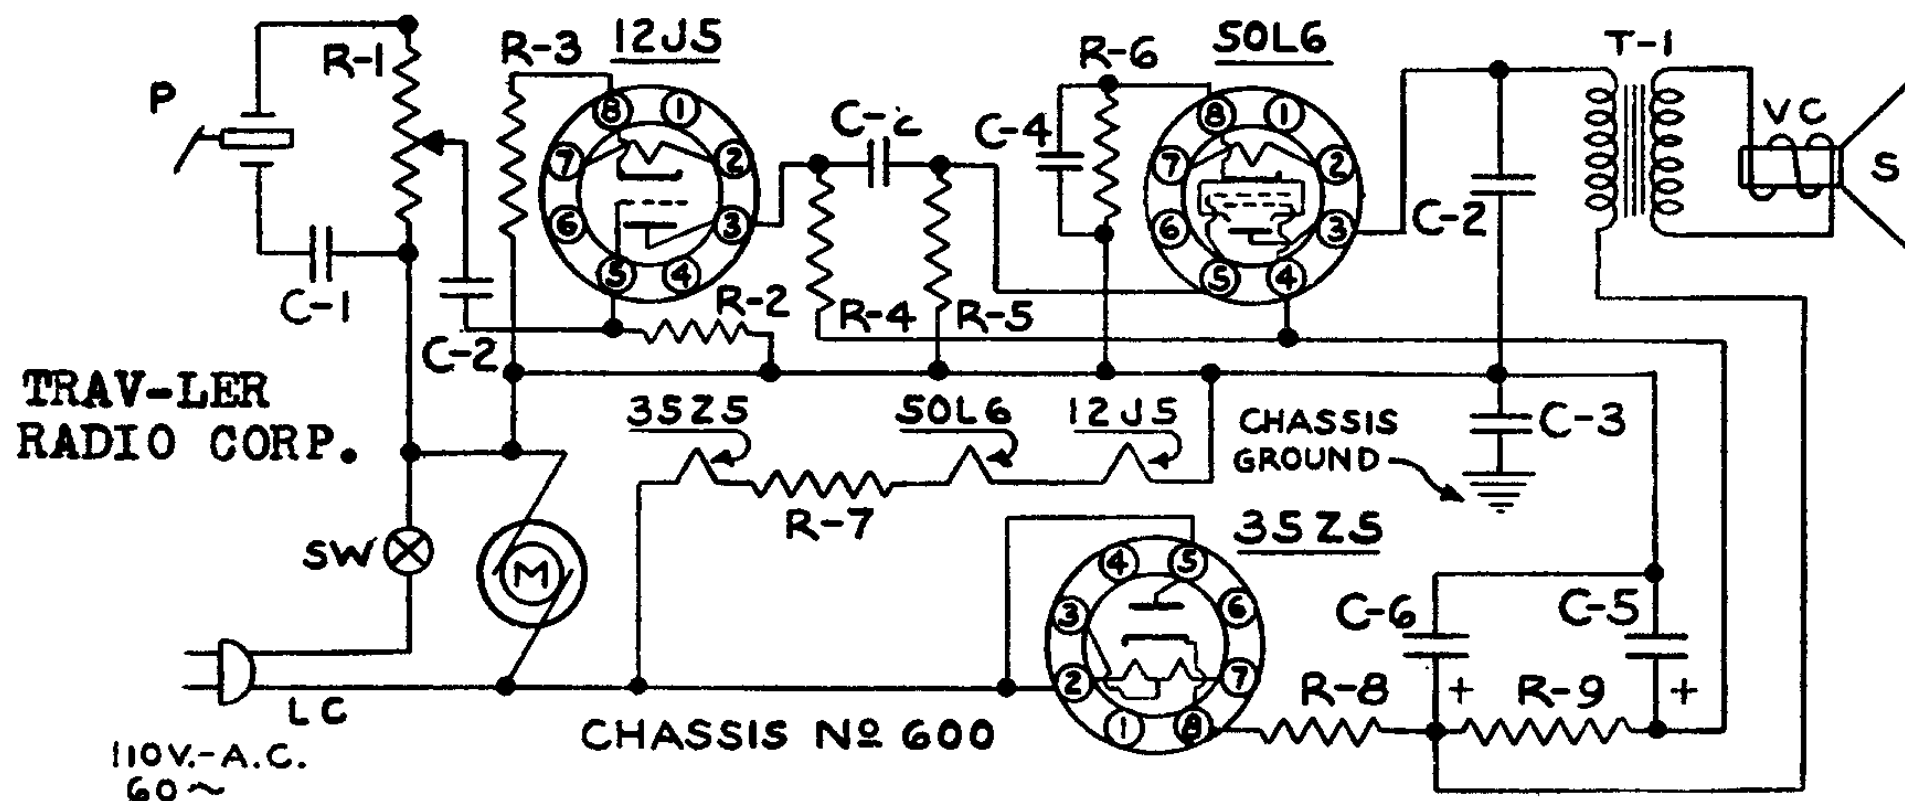

PART NO.		DESCRIPTION	PART NO.		DESCRIPTION
VC-3	R-1	1 MEG. VOLUME CONTROL	EC-5	C-4	10 MFD. 25 V. } ELECTROLYTIC
C.R.-16	R-2	220 MΩ RESISTOR 1/2 W. 20%		C-5	12 MFD. 150 V. } CONDENSER
CR-15	R-3	5000Ω RESISTOR " "	PU-3	C-6	80 MFD. 150 V. } CONDENSER
CR-17	R-4	100 MΩ RESISTOR " "	P		L-75 CRYSTAL CARTRIDGE
CR-8	R-5	470 MΩ RESISTOR " "	RC-3	M	RECORD CHANGER MOTOR
CR-11	R-6	150Ω RESISTOR " "	CO-2	LC	LINE CORD
WR-2	R-7	130Ω 3W. 5% WIRE WOUND	SW		A.C. SWITCH ON VOL. CONTROL
CR-1	R-8	33Ω RESISTOR 1/2 W. 20%	SP-2	T-1	OUTPUT TRANSFORMER
CR-15	R-9	4700Ω RESISTOR 1/2 W. 20%		VC	VOICE COIL
PC-5	C-1	.05 MFD. CONDENSER 400 V.	TU-7	S	P.M. SPEAKER
PC-7	C-2	.01 MFD. CONDENSER 400 V.			12J5GT 50L6GT 35Z5GT
PC-8	C-3	.1 MFD. CONDENSER 400 V.			