
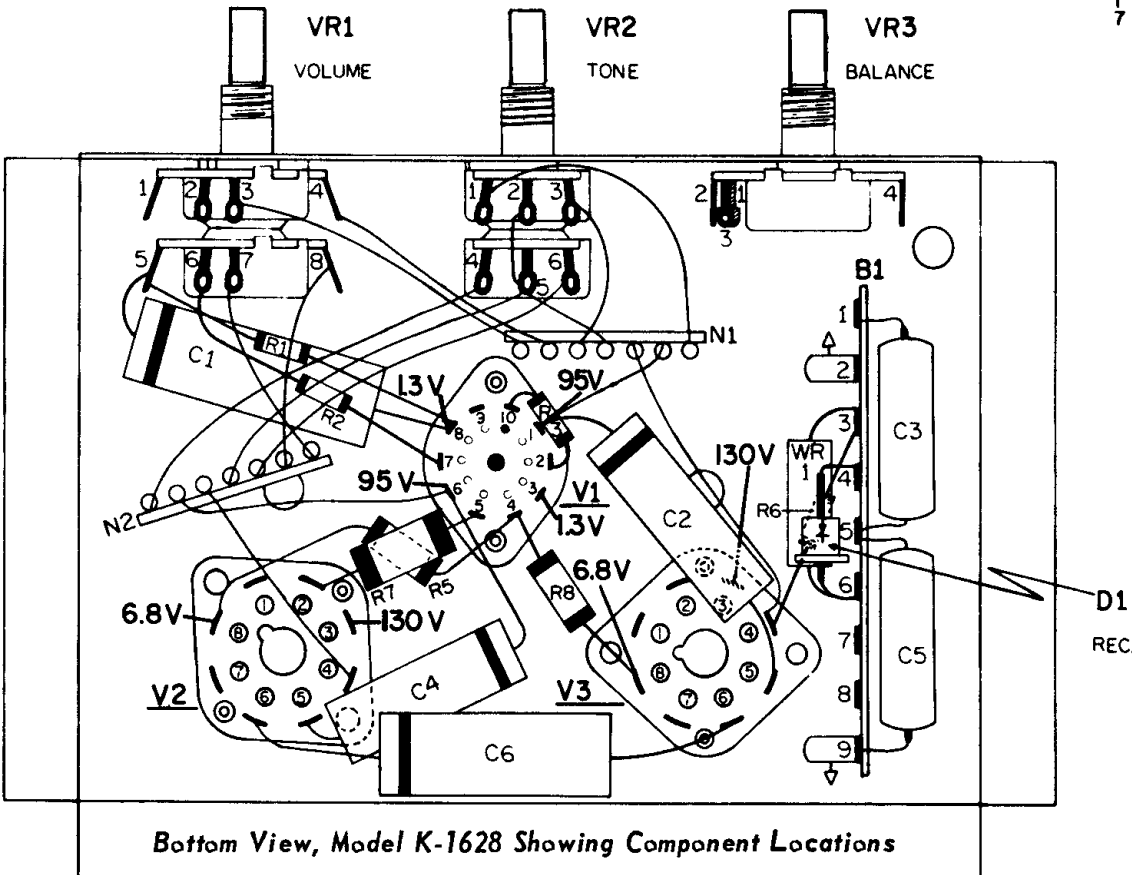


# PHILCO AMPLIFIER—MODEL K-1628

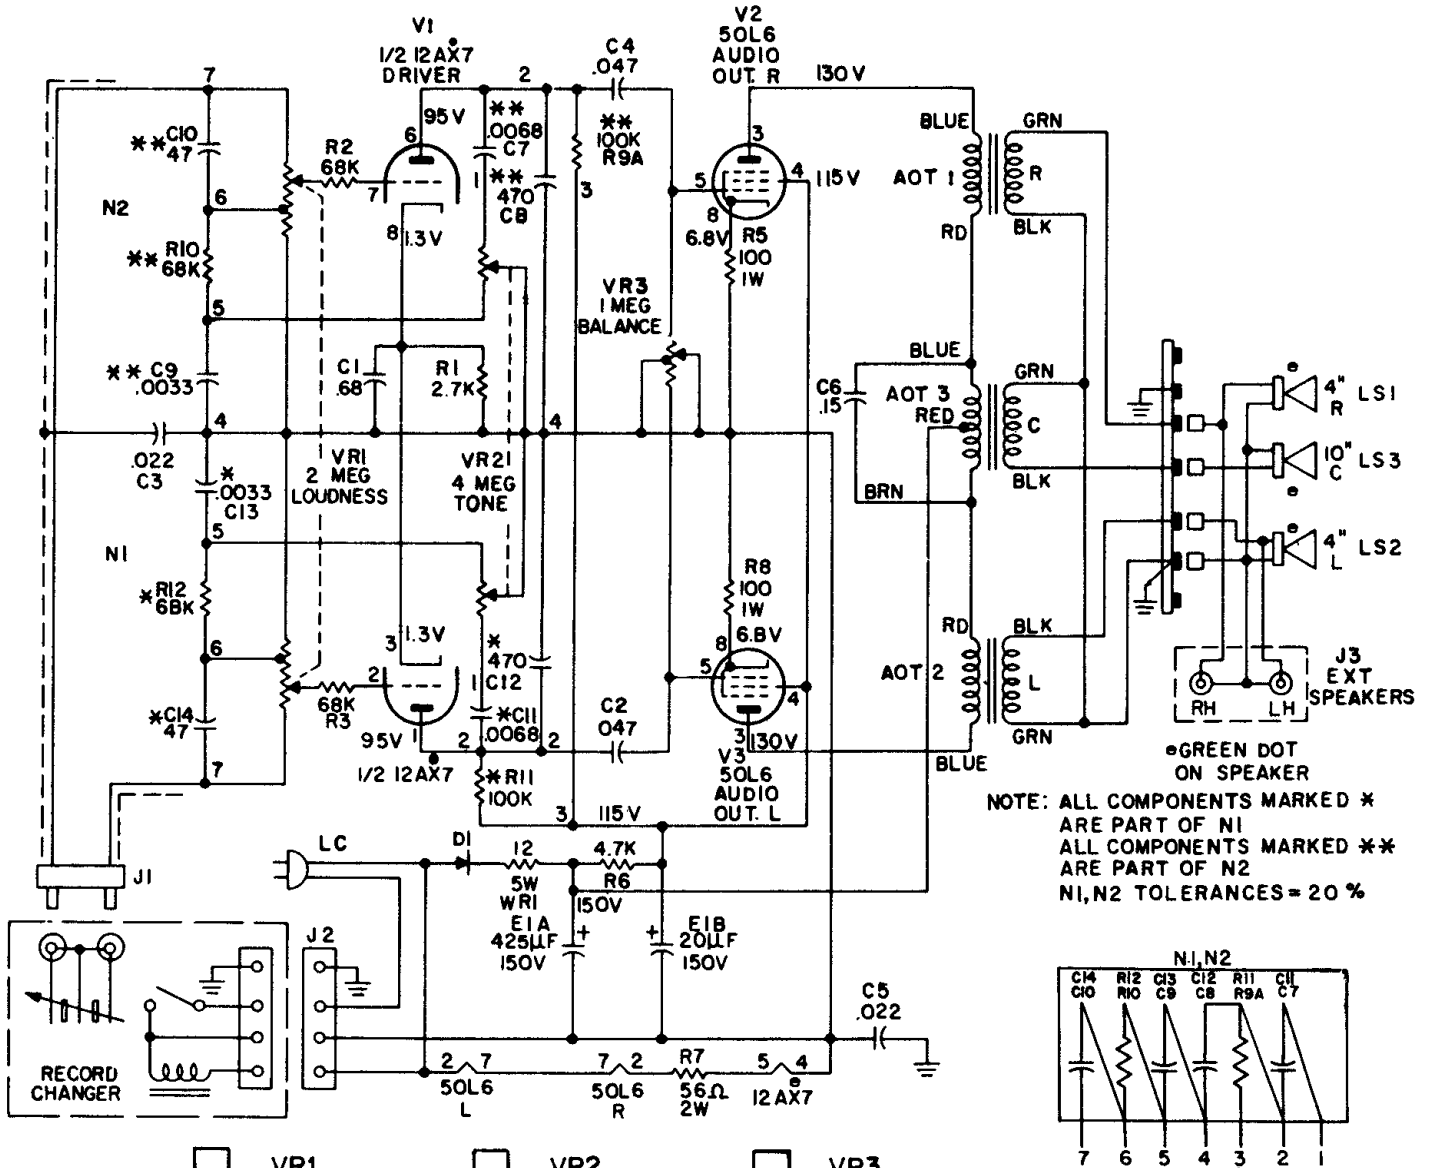

**AUDIO OUTPUT:** Model K-1628 has a peak power of 8 watts, 2 watts at 10% for each side channel.

**POWER CONSUMPTION:** Model K-1628 — 55 watts.

**OPERATING VOLTAGE:** 105-120 volts, 60 cycles AC.

**SPEAKERS:** Model K-1628 contains two 4" speakers for left and right channel information. Their impedance is  $8\Omega$  and magnet weight is .68 ounces. This model employs a 10",  $16\Omega$  woofer, for central bass listening.

**SS43BE AUXILIARY SPEAKER SYSTEM:** Model 'K-1628 uses, as auxiliary equipment, two 4" external speakers. Voice coil impedance is  $8\Omega$  and magnet weight is 2.15 ounces. The speaker units are available in beige, part number 43-9439.