

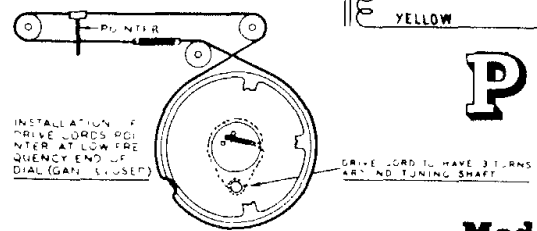



SWITCH SHOWN FROM
REAR OF CHASSIS,
BOTTOM VIEW, IN POS-
ITION No 1 (BROADCAST)



Models 40-130 and 40-135

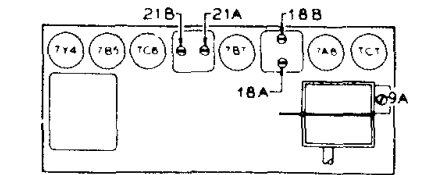

TOP VIEW OF CHASSIS SHOWING COMPENSATOR LOCATION

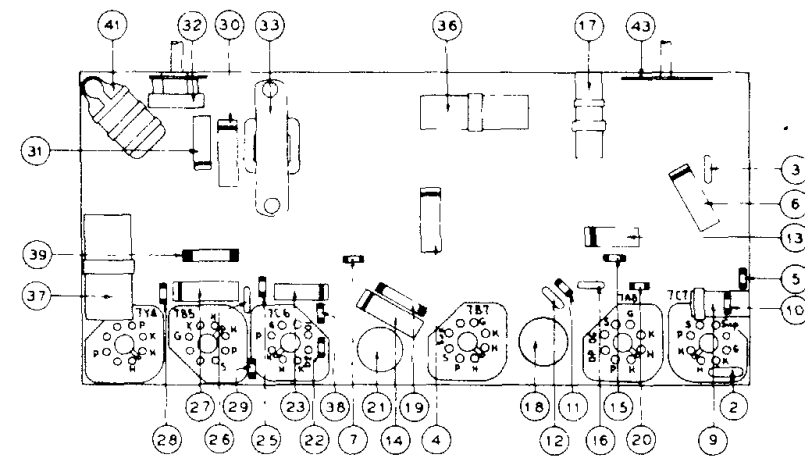

SCHE- No.	DESCRIPTION	PART No.
1	Loos Assembly	38-9881
1A	Compensator	31-6381
1B	Mica Cond. (.250 mmfd.) 1/2 watt	31-6381R
1C	Mica Cond. (.250 mmfd.) 1/2 watt	33-310339
2	Mica Cond. (.250 mmfd.)	61-0033
3	Mica Cond. (.250 mmfd.)	5886
4	Tubular Cond. (.05 mfd.)	30-4518
5	Resistor (1.0 meg. 1/2 watt)	30-4518R
6	Resistor (150,000 ohms. 1/2 watt)	33-41539
7	R. F. Transformer	31-3213
8	Tuning Condenser	32-3213R
9	Resistor (9500 ohms. 1/2 watt)	31-3213R
10	Mica Cond. (.250 mmfd.) 1/2 watt	33-342339
11	Mica Cond. (.250 mmfd.) 1/2 watt	61-0033
12	Tubular Cond. (.05 mfd.)	30-4518
13	Tubular Cond. (.05 mfd.)	30-4518R
14	Resistor (10,000 ohms. 1/2 watt)	31-0033
15	Resistor (10,000 ohms. 1/2 watt)	61-0033
16	Output Transformer	32-3212
17	1st I. F. Trans. Assy.	32-3212R
18	Resistor (18,000 ohms. 1 watt)	33-31439
19	Resistor (18,000 ohms. 1 watt)	33-31439R
20	2nd I. F. Trans. Assy.	32-3281
21		32-3281R
22	Resistor (.2 meg. 1/2 watt)	33-522439
23	Tubular Cond. (.01 mfd.)	30-5324
24	Resistor (.2 meg. 1/2 watt)	33-532439
25	Resistor (.2 meg. 1/2 watt)	33-547339
26	Mica Cond. (.250 mmfd.)	61-0033
27	Tubular Cond. (.004 mfd.)	30-45758
28	Resistor (1.0 meg. 1/2 watt)	33-41539
29	Tubular Cond. (.02 mfd.) 1/2 watt	33-41539R
30	Tubular Cond. (.02 mfd.)	30-4448
31	Tone Control and On-Off Switch	42-1520
32	Output Transformer	32-8085
33	Con-Sak (Part No. 1178-3)	36-4085
34	Field Coil (Replace Spkr. Part No. 36-1478)	30-2401
35	Electrolytic Cond. (.4 mfd. 400 V.)	33-42731
36	Electrolytic Cond. (.4 mfd. 400 V.)	33-42731R
37	Resistor (220 ohms. 1 watt)	33-122431
38	Power Trans. (115 V. 50-60 cycles)	32-8064
39	Bakelite Cond. (.01-.01 mfd.)	3903-04
40	Pilot Lamps	42-1084
41	Pushbutton Switch (Model 40-135 only)	42-1084R
42	Pushbutton Switch (Model 40-135 only)	42-1528
43	Pushbutton Switch (Model 40-135 only)	43-1528R
44	Padcer Strip (Model 40-135 only)	31-6315
45		