


MODEL D920

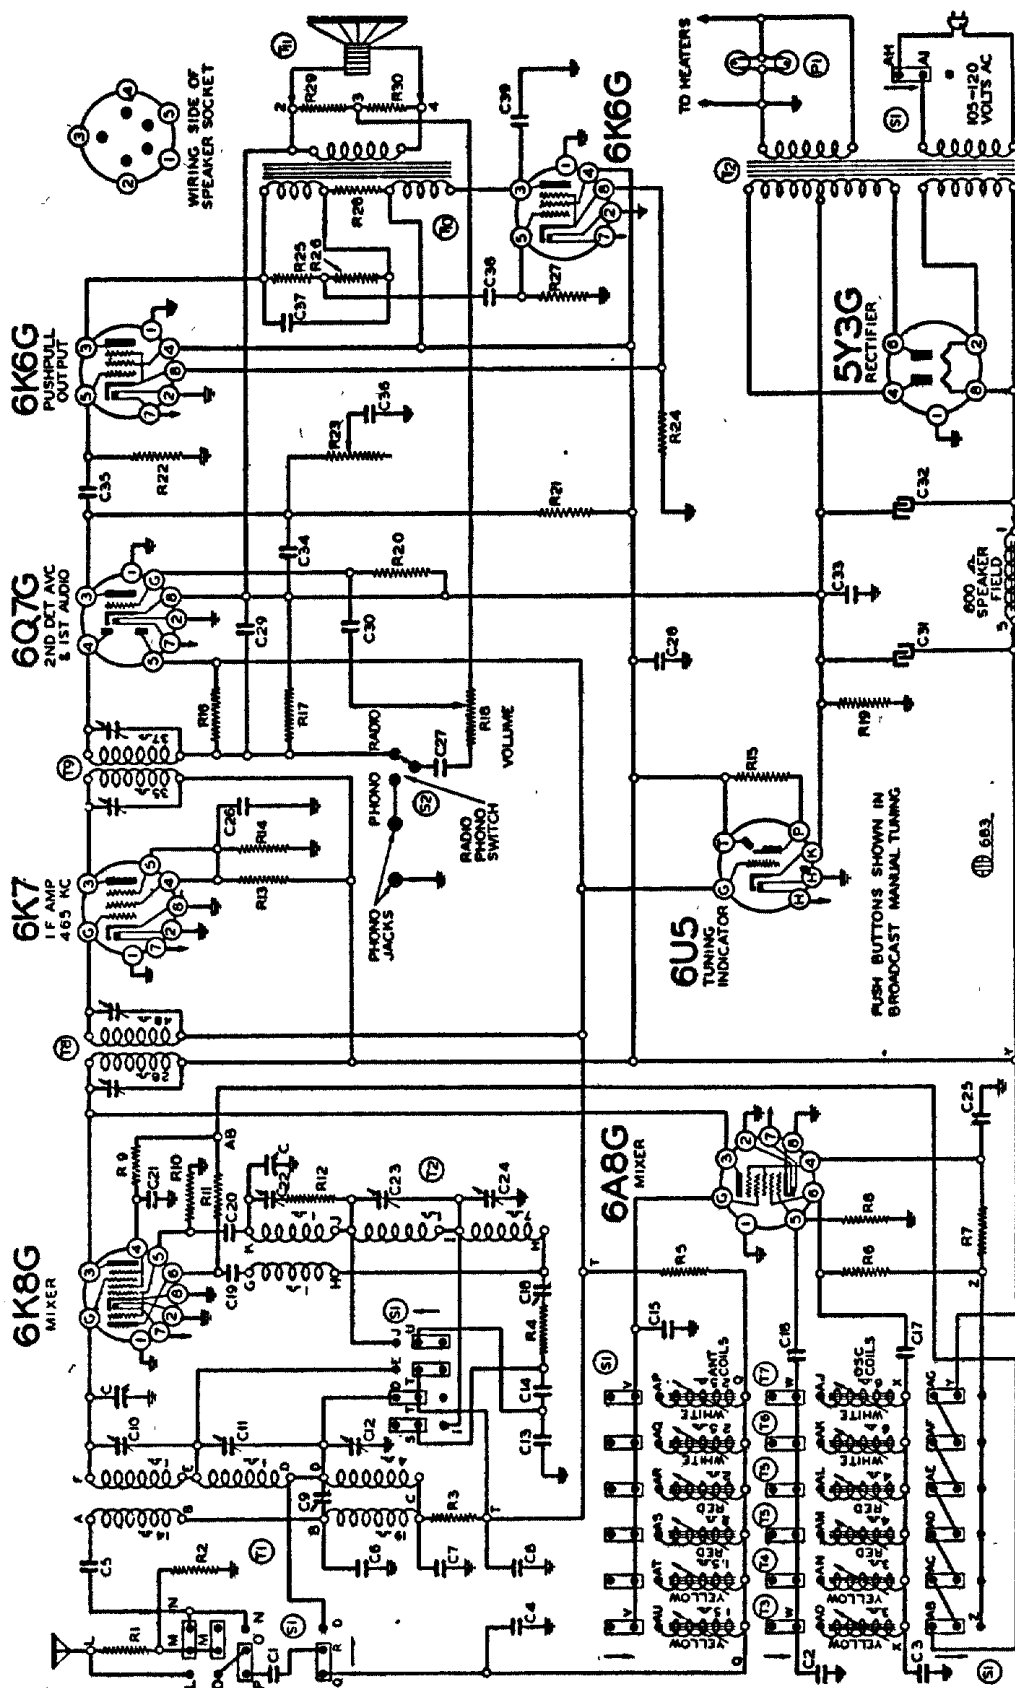

IF PEAK
465 KC

Cir. Dia. Ref.	Part No.	Description	R19	R20	R21	R22	R23	R24	R25	R26	R27	R28	R29	R30	C	C1	C2	C3	C4	C5	C6	C7	C8	C9
		RESISTORS																						
R1	13041	800 ohm-1/2 w.	130240	30 ohm-1/2 w.																				
R2	13017	10M ohm-1/2 w.	130225	15 megohm-1/2 w.																				
R3	130103	100M ohm-1/2 w.	1309	200M ohm-1/2 w.																				
R4	130231	75 ohm-1/2 w.	1303	500M ohm-1/2 w.																				
R5	1309	200M ohm-1/2 w.	101134	300M ohm tone control																				
R6	130149	15M ohm-1/2 w.	130220	300 ohm-1 watt																				
R7	13012	50M ohm-1/2 w.	1303	500M ohm-1/2 w.																				
R8	13012	50M ohm-1/2 w.	13064	3500 ohm-1/2 w.																				
R9	13057	35M ohm-1/2 w.	1303	500M ohm-1/2 w.																				
R10	13012	50M ohm-1/2 w.	130255	500 ohm-1 watt																				
R11	13065	30M ohm-1 watt	130215	25 ohm-1/2 w.																				
R12	130174	50 ohm-1/2 w.	130168	100 ohm-1/2 w.																				
R13	130103	100M ohm-1/2 w.																						
R14	13012	50M ohm-1/2 w.																						
R15	130110	1 megohm-in tuning indicator socket																						
R16	1304	3 megohm-1/2 w.																						
R17	1303	500M ohm-1/2 w.																						
R18	101133	1 megohm volume control																						
						</																		