


# Models 7-S-204, 7-S-232, 7-S-240, 7-S-242, 7-S-258, 7-S-260, 7-S-261 (5709 Chassis)

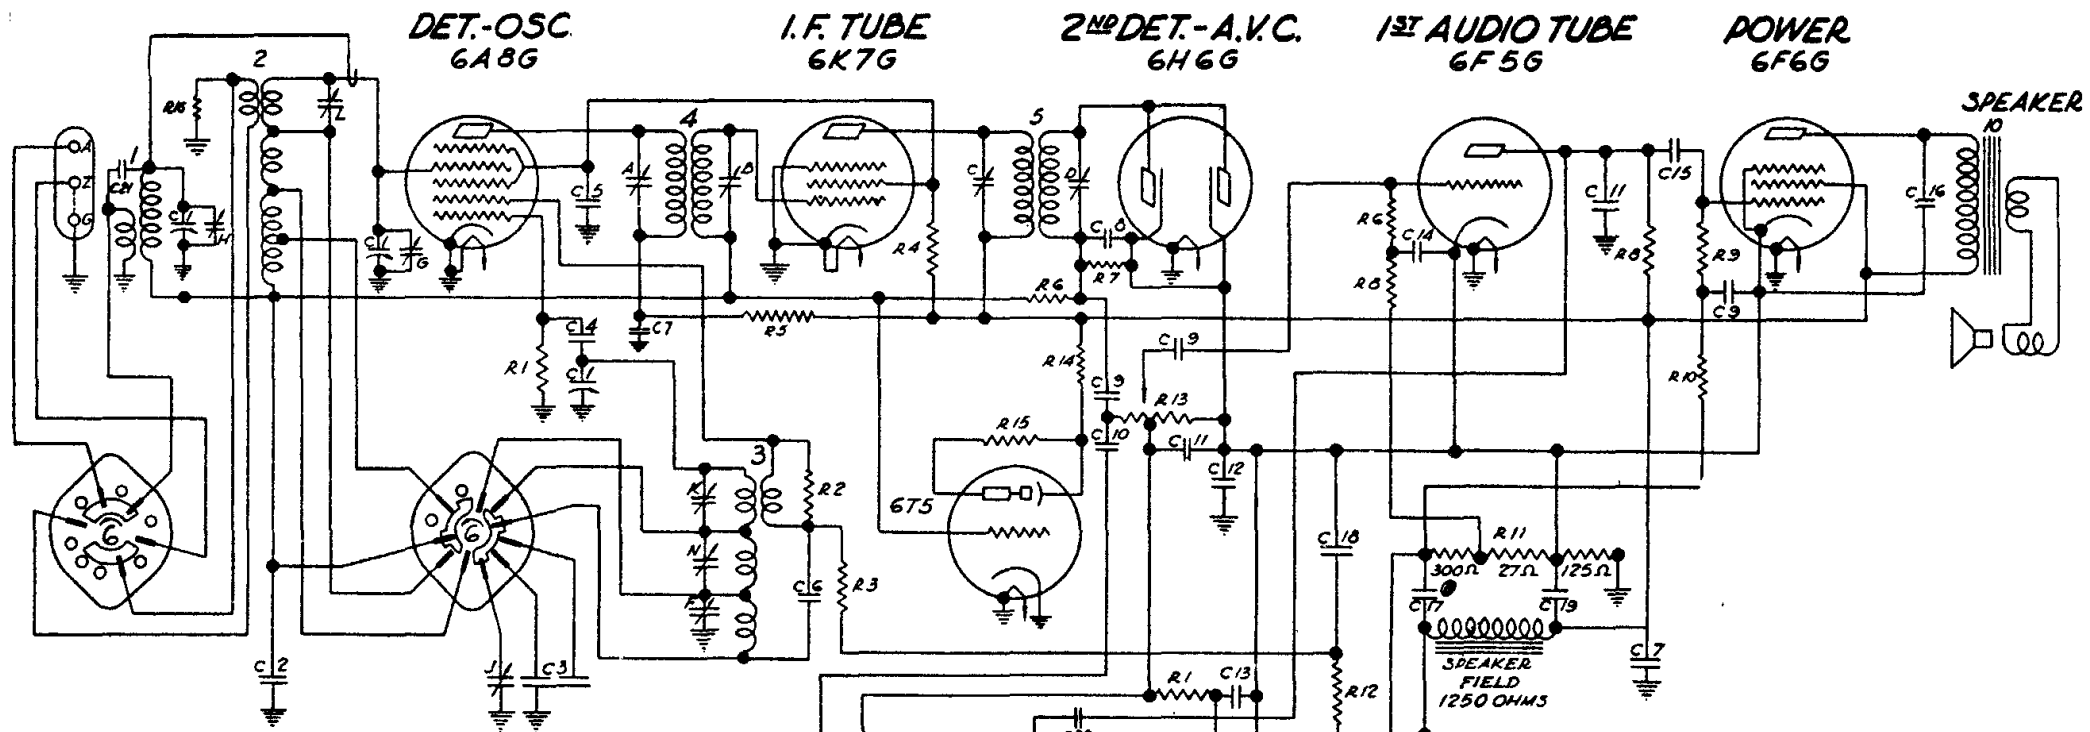

DIAG NO	PART NO	DESCRIPTION
C1	22-548	THREE GANG VARIABLE
C2	22-487	.05 MFD. 400 V.
C3	22-550	DUAL FIXED PADDER
C4	22-127	.25 MFD. 600 V.
C5	22-170	.1 MFD. 400 V.
C6	22-350	.002 MFD. 600 V.
C7	22-212	.05 MFD. 400 V.
C8	22-162	.0001 MFD. 600 V.
C9	22-327	.02 MFD. 200 V.
C10	22-182	.00025 MFD. 600 V.
C11	22-147	.0005 MFD. 600 V.
C12	22-185	.01 MFD. 200 V.
C13	22-326	.003 MFD. 400 V.
C14	22-190	.1 MFD. 200 V.
C15	22-435	.02 MFD. 600 V.
C16	22-627	.002 MFD. 1000 V.
C17	22-549	12 MFD. ELECTROLYTIC 450 V.
C18	22-562	2 MFD. 450 V.
C19	22-562	16 MFD. 450 V.
C20	22-448	.004 MFD. 600 V.
1	5-4780	ANTENNA COIL ASSEMBLY
2	5-5054	DETECTOR COIL & SHIELD ASSEM.
3	5-4969	OSCILLATOR COIL & SHIELD ASSEM.
4	95-416	1ST I.F. TRANS.
5	95-417	2ND I.F. TRANS.
6	85-110	BAND SELECTOR SWITCH
7	85-108	TONE CONTROL SWITCH
8	95-418	POWER TRANS.-117V.50-60CYCLE
9	95-451	POWER TRANS.-ALL VOLTAGE SOCKLE
10		SPEAKER TRANSFORMER

DIAG NO	PART NO	DESCRIPTION
R1	63-593	47M OHMS 1/4 W. ± 20%
R2	63-587	4700 OHMS 1/4 W. ± 20%
R3	63-680	10M OHMS 1 W. ± 20%
R4	63-677	33M OHMS 1 W. ± 10%
R5	63-605	1000 OHMS 1/2 W. ± 20%
R6	63-271	1 MEGOHMS 1/4 W. ± 20%
R7	63-658	390M OHMS 1/4 W. ± 10%
R8	63-296	220M OHMS 1/4 W. ± 20%
R9	63-597	470M OHMS 1/4 W. ± 20%
R10	63-325	150M OHMS 1/4 W. ± 20%
R11	63-613	3 SECTION CAND OHM
R12	63-608	15M OHMS 1 W. ± 20%
R13	63-611	2 MEGOHM VOLUME CONTROL
R14	63-609	22 M OHMS 1/2 W. ± 20%
R15		1 MEGOHM MOUNTED IN TUNING TUBE SOCKET
VARIABLE TRIMMERS		
A	1ST I.F. TRANS PRIMARY	
B	1ST I.F. TRANS SECONDARY	
C	2ND I.F. TRANS PRIMARY	
D	2ND I.F. TRANS SECONDARY	
F	BROADCAST OSCILLATOR (SEE NOTE)	
G	DETECTOR BROADCAST (ON GANG)	
H	ANTENNA BROADCAST (ON GANG)	
J	*22-519 BROADCAST PADDER	
K	SHORT WAVE OSCILLATOR (SEE NOTE)	
L	SHORT WAVE DETECTOR (SEE NOTE)	
N	POLICE BAND OSCILLATOR (SEE NOTE)	
NOTE:- TRIMMERS F, K, L, & N MOUNTED ON BAKELITE STRIP *22-549		

DIAG NO	PART NO	DESCRIPTION
C21	22-604	10 MFD. CERAMIC
R16	63-583	1000 OHMS 1/4 W ± 20%
SPEAKERS		MODELS
49-203	8"	7-S-232
49-206	8"	7-S-240
49-206	8"	7-S-242
49-181	10"	7-S-258
49-195	12"	7-S-260
49-195	12"	7-S-261

**I.F.-FREQUENCY 456 K.C.**  
**7 TUBE SUPERHETERODYNE**  
**3 BAND**  
**CHASSIS NO 5709**  
**ZENITH RADIO CORP.**