
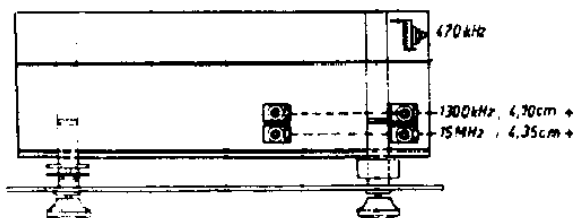
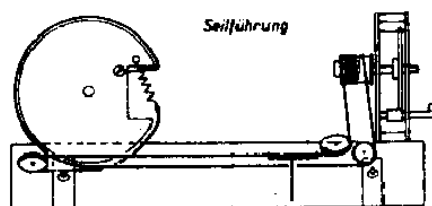


Sondyna E4311


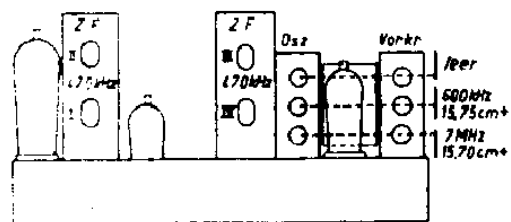


WELLENBEREICHE

MW. 520-1560kHz 192-577 Meter
 KW 5.9-18 MHz 16.7-51 Meter

Zwischenfrequenz 470kHz

+Zeigerstellung auf cm-Skala

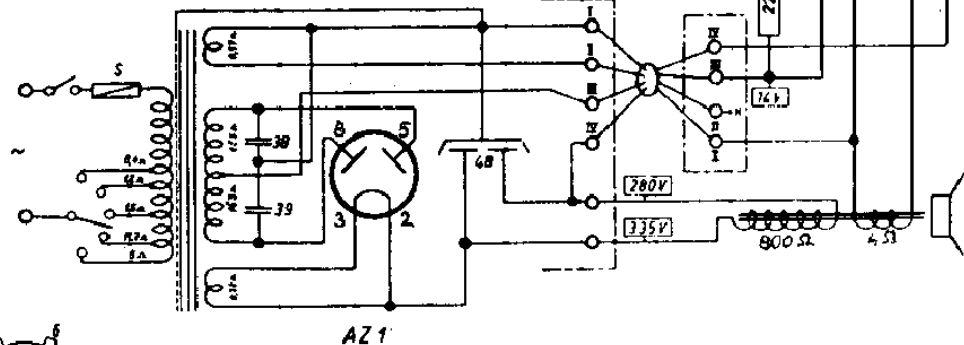

AZ 1

1Sicherung 5 800mA 5*20mm
 2BeleuchtungsLämpchen Type 3341
 6.3V 0.3A

**Sondyna A.G.
 Zürich**

Kondensatoren

C 1	Glimmer	150	pf	± 10%
2	Glimmer	50	pf	± 10%
3	Trimmer	35-90	pf	
5	Trimmer	5-60	pf	255 N/1
6	Trimmer	5-60	pf	255 N/1
7	Drehko DUCATI EC	3408/283		
8	Papier	0,1	mf	500 V.
9	Papier	0,1	mf	1500 V.
10	Glimmer	50	pf	± 10%
12	Glimmer	457	pf	± 1%
13	Glimmer	150	pf	± 10%
14	Trimmer	5-60	pf	
15	Trimmer	5-60	pf	
18	Glimmer	100	pf	± 1%
19	Glimmer	100	pf	± 1%
20	Papier	0,05	mf	1500 V.
21	Elektrolyt	4	mf	450 V.
22	Papier	0,05	mf	1500 V.
23	Papier	0,05	mf	500 V.
24	Papier	2 x 0,3	mf	500 V.
25	Papier	0,05	mf	500 V.
26	Glimmer	150	pf	± 10%
27	Glimmer	50	pf	± 10%
28	Glimmer	100	pf	± 1%
29	Glimmer	100	pf	± 1%
30	Glimmer	100	pf	± 10%
31	Glimmer	100	pf	± 10%
32	Papier	0,05	mf	1500 V.
33	Papier	0,05	mf	1500 V.
35	Papier	3000	pf	2000 V.
36	Papier	1000	pf	2000 V.
37	Papier	1000	pf	2000 V.
38	Papier	5000	pf	2000 V. ~
39	Papier	5000	pf	2000 V. ~
40	Elektrolyt	100	mf	12 V.
41	Elektrolyt	8	mf	450 V.
42	Papier	0,1	mf	1500 V.
43	Elektrolyt	30 +30	mf	

Sondyna A.G.
Zürich

Widerstände

R 1	30	kOhm	2	Watt
2	100	"	$\frac{1}{4}$	"
3	50	k	$\frac{1}{4}$	"
4	30	k	1	"
5	0,1	m	$\frac{1}{4}$	"
6	2,5	k	1	"
7	50	k	1	"
8	40	k	$\frac{1}{4}$	"
9	0,1	m	1	"
10	1	m	$\frac{1}{4}$	"
11	1	m	$\frac{1}{4}$	"
12	0,2	m	$\frac{1}{4}$	"
13	0,3	m	$\frac{1}{4}$	"
14	0,1	m	$\frac{1}{4}$	"
15	2,5	k	$\frac{1}{4}$	"
16	0,5	m	$\frac{1}{4}$	"
17	0,5	m	$\frac{1}{4}$	"
18	1	m	$\frac{1}{4}$	"
19	0,1	m	$\frac{1}{4}$	"
20	30	"	$\frac{1}{4}$	"
21	80	"	$\frac{1}{2}$	"
22	100	"	1	"
23	0,2	m	$\frac{1}{4}$	"
24	0,1	m	$\frac{1}{4}$	"
25	0,2	m	$\frac{1}{4}$	"
26	0,5	m	$\frac{1}{4}$	"
27	1	k	1	"
28	1	m	$\frac{1}{4}$	"
29	0,2	m	$\frac{1}{4}$	"
30	100	"	$\frac{1}{4}$	"

P Potentionmeter
0,5 mOhm

Röhren:

ECH 4, ECH 4,
EBL 1, AZ 1.

Skalalämpchen:

2 x 6,3 V. 0,3 Amp.

Sicherung:

5 x 20 mm, 800 mA