
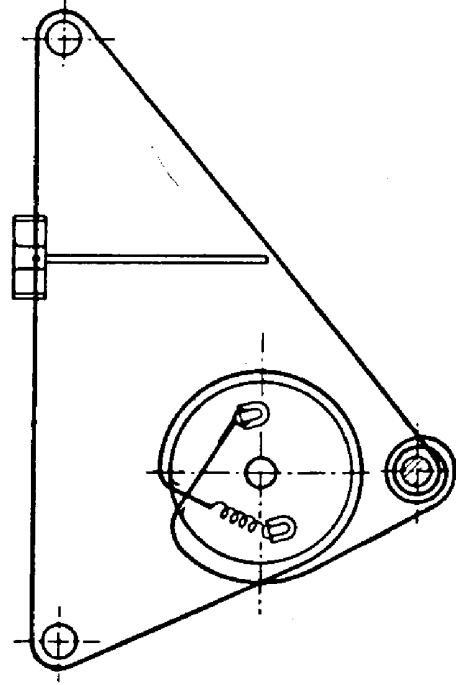
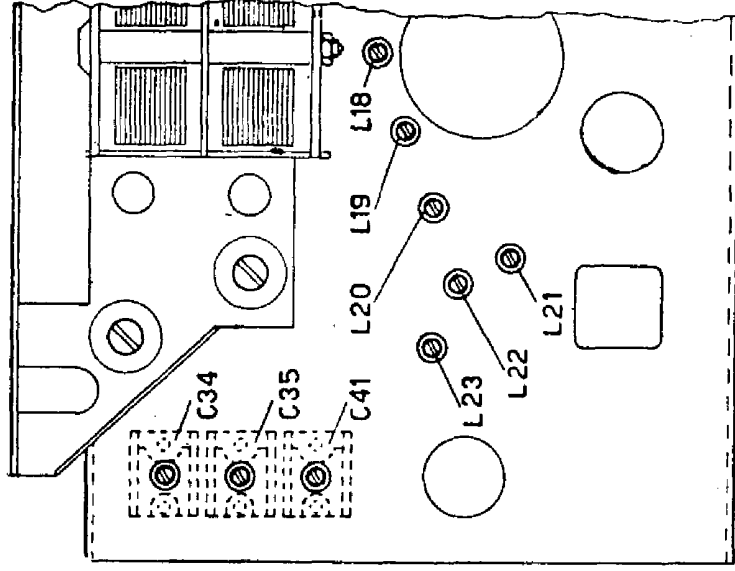


RADIO MARELLI - Mod. 137. Onde medie da 516 a 1615 kc/s; onde tropicali da 2170 a 5800 kc/s; banda OC1 da 5350 a 8500 kc/s; banda OC2 da 7850 a 11.800 kc/s; banda OC3 da 11.300 a 17.000 kc/s; banda OC4 da 16.900 a 27.150 kc/s. Media frequenza a 455 kc/s.

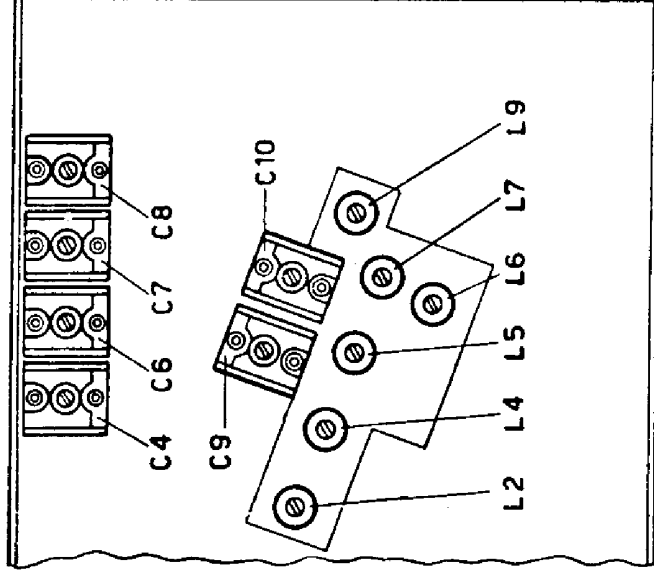

VALORI PER IL MODELLO RADIOMARELLI 137

R1	1 MΩ	1/2 W	C20	4700 pF
R2	100 Ω	1/4 W	C21	47 KpF
R3	20000 Ω	1/4 W	C22	40 μF
R4	0,5 MΩ	1/4 W	C23	64 μF
R5	2,5 MΩ	1/4 W	C24	16 μF
R6	50 Ω	1/4 W	C26	1000 μF
R7	0,5 MΩ	1/4 W	C29	10000 μF
R8	10 MΩ	1/2 W	C30	470 μF
R9	0,5 MΩ	1/4 W	C31	2200 μF
R10	0,5 MΩ	1/4 W	C32	47 KpF
R11	200 Ω	1 W	C33	100 pF
R12	4000 Ω	3 W	C34	4-25 pF
R13	2000 Ω	2 W	C35	5-60 pF
R14	2,5 MΩ	1/4 W	C36	450 pF
R15	0,1 MΩ	1/4 W	C37	1320 pF
R16	0,5 MΩ	1/4 W	C38	182 pF
			C39	150 pF
			C40	1,5 pF
			C41	5-60 pF