











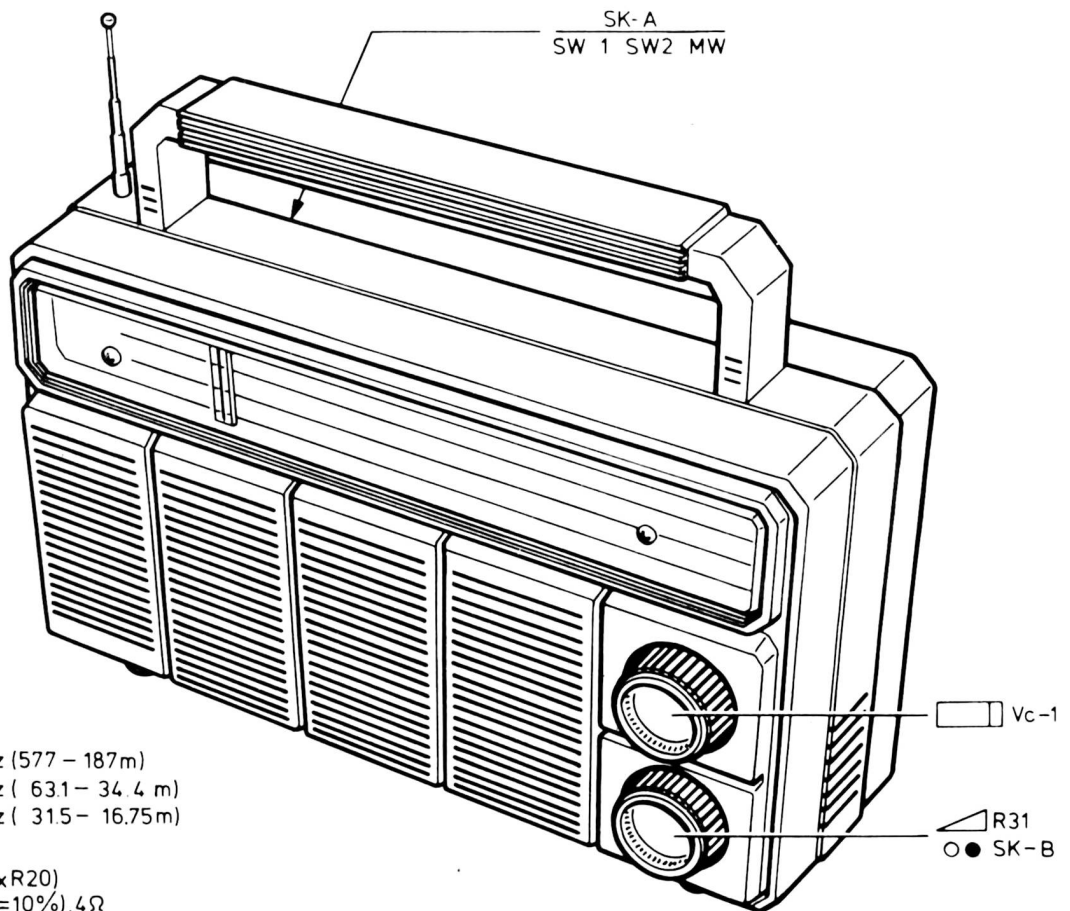




Service  
Service  
**Service**



# Service Manual




MW : 520-1605 kHz (577 - 187m)  
 SW-1 : 4.75-8.7 MHz ( 63.1 - 34.4 m)  
 SW-2 : 9.5-17.9 MHz ( 31.5 - 16.75 m)  
 AM-IF=452 kHz  
 SUPPLY :  $\text{4}$  6V (4xR20)  
 OUTPUT : 800mW (d=10%), 4Ω

11108B12

Wave range	Signal to		Varco	Detune	Adjust	Indication
SK...						
M.W. (520-1605 kHz)	452 kHz via 40 nF		Min. cap.	S6,S7,S8	S6	 max.
					S7	
					S8	
	512 kHz		Max. cap.		S5	 max.
	1635 kHz		Min. cap.		CTb	
	600 kHz		Tune-in		S3a,b	
	1400 kHz				CTa	
	SW-2 (9,5-17,9 MHz)	9,3 MHz		Max. cap.		S4
18,25 MHz		Min. cap.		C9		
10 MHz		Tune-in		S1		
17 MHz				C1		
SW-1 (4,75-8,7 MHz)	5 MHz		Tune-in		S2	 max.
	7,3 MHz				C2	
 Repeat - Herhalen - Répéter - Wiederholen - Ricominciare - Repetera - Gentage - Gjentagelse - Toista						

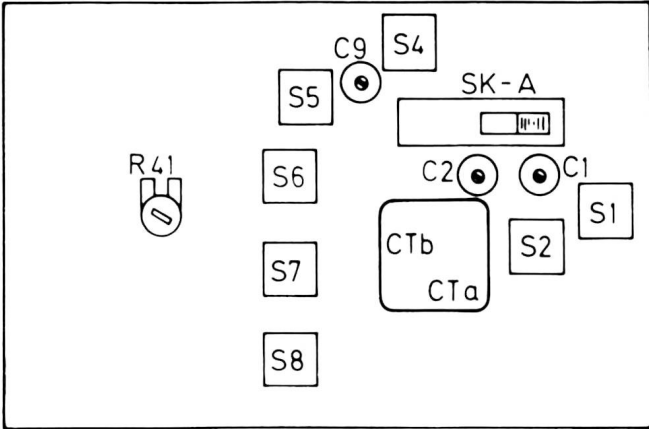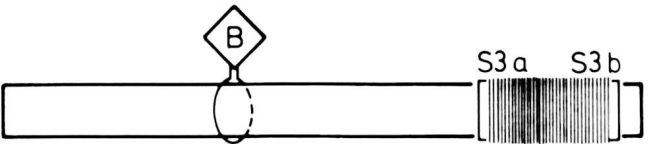

MISC.	SK-C	B1	TS7.8	TS6	TS5	TS4	TS3	D2	TS2	VC1	SK-A.D1/05TS1.D1/00.D3.4	MISC.						
S	9							8.7.6.5		4	2.3	1	S					
C		37.43.32.36.39.35	34		38	33	31.19	17.18.7.11.14	13	16	15.12	9	42	8	2.6.41.4	1	3	C
R	31	53.33.43.35	32	37	42	34	20.36.17.12.21.11.19.14			16.13.15.18.4			3.2.5.52		51	1		R

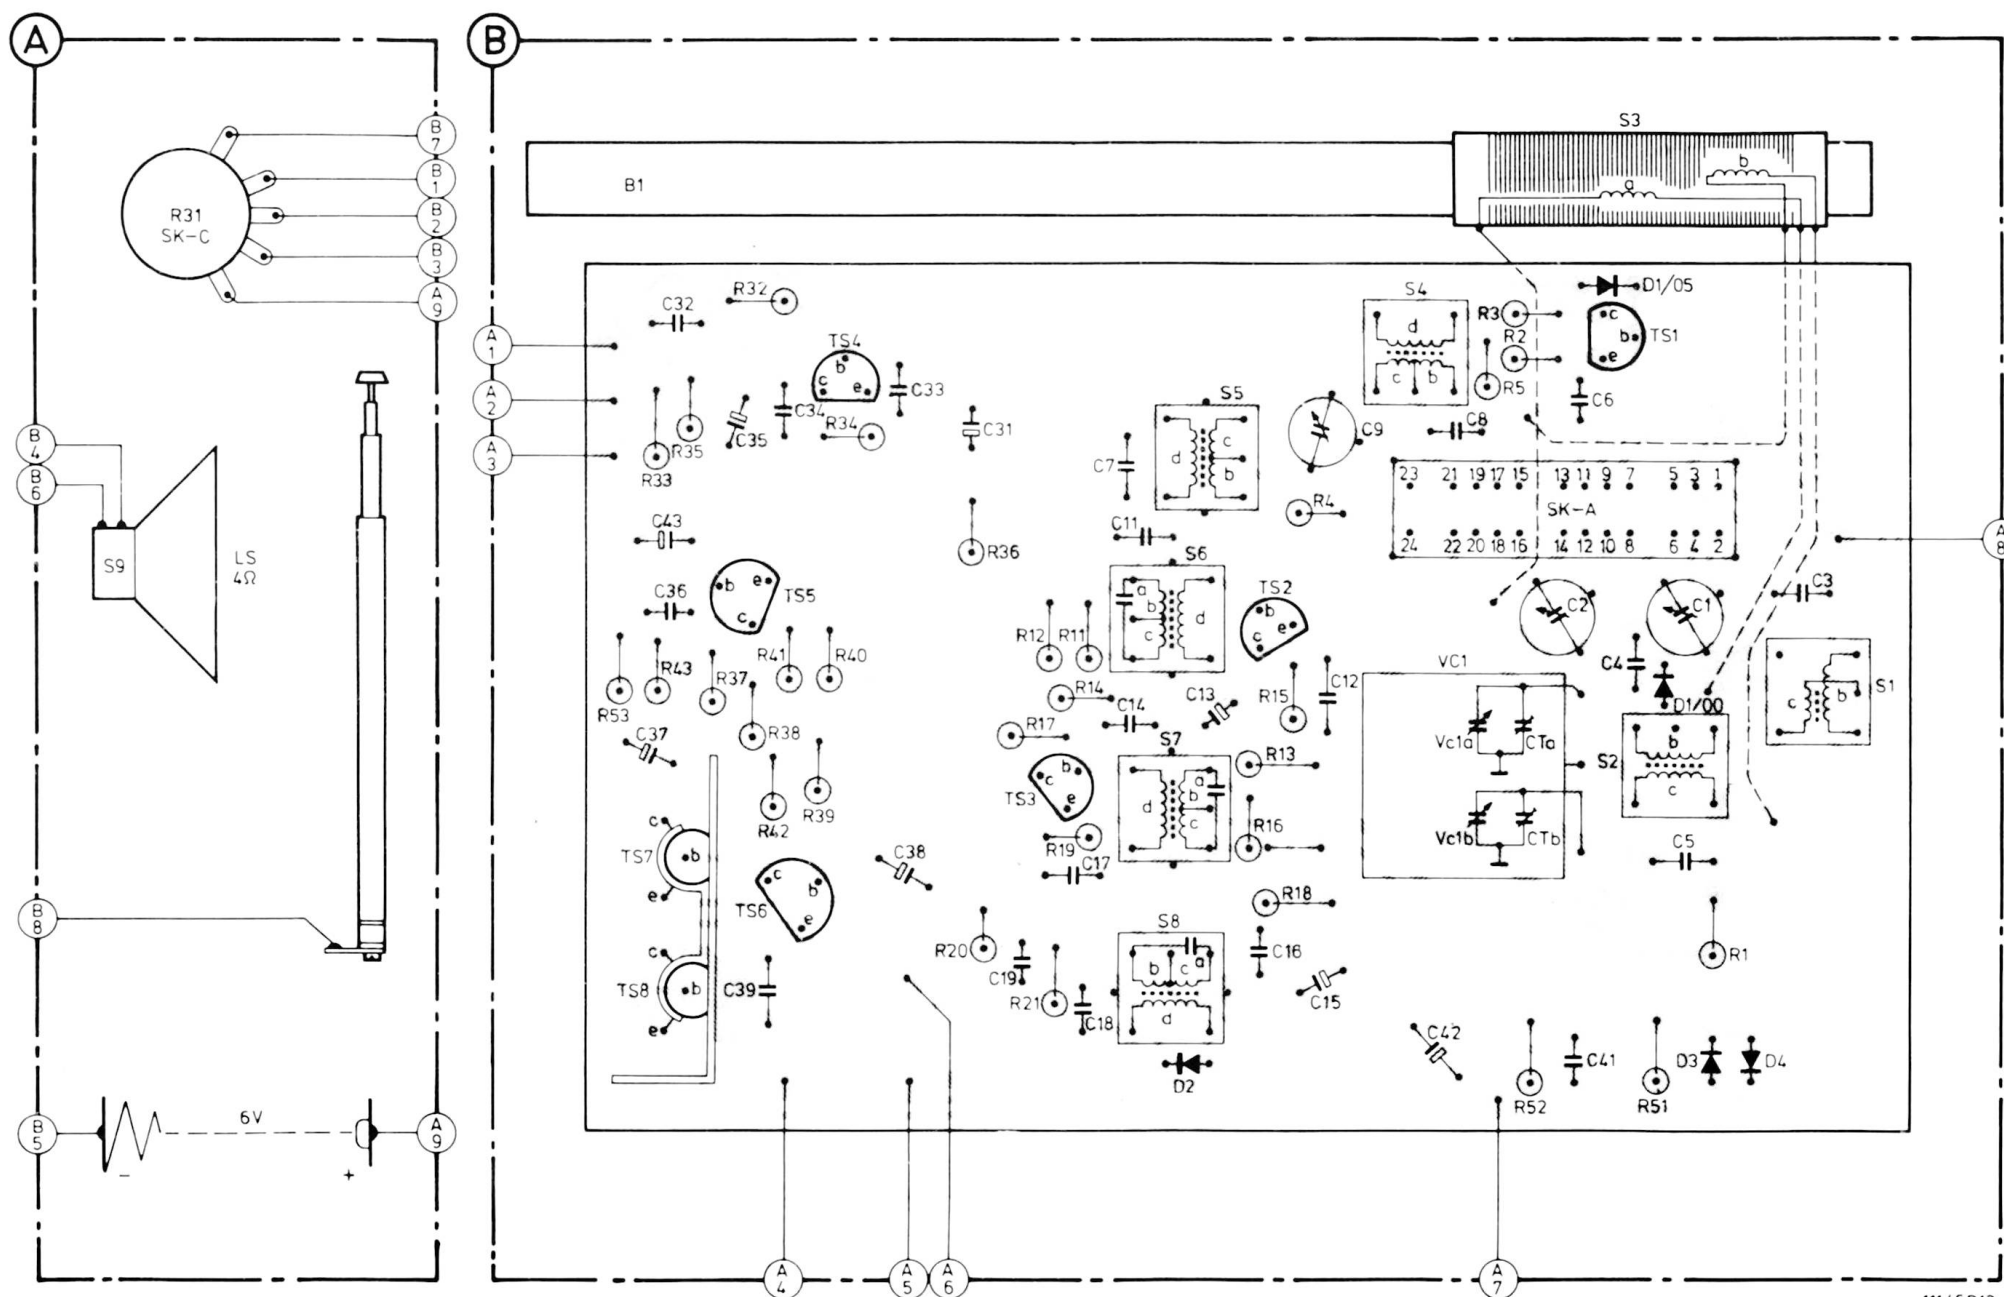

MISC.	D4	D1/00.D3.TS1.D1/05	VC1	TS2	D2	TS3	TS4	TS6.5	TS7.8	MISC.
S	1	2	4	5.6.7.8	-					S
C	3	1 5	4.6.41.2	8 42	9.12.15 16	13 14.11.7.18.17	19 31.33.38	34 35.39	32.36.43.37	C
R		1 51	2.52.3.5	4.15.13.16.18		14.11.19.12.21.17.36.20	34.40.39.38.41.42.32.37.35.43.53.33			R

