


# Philips 940 A

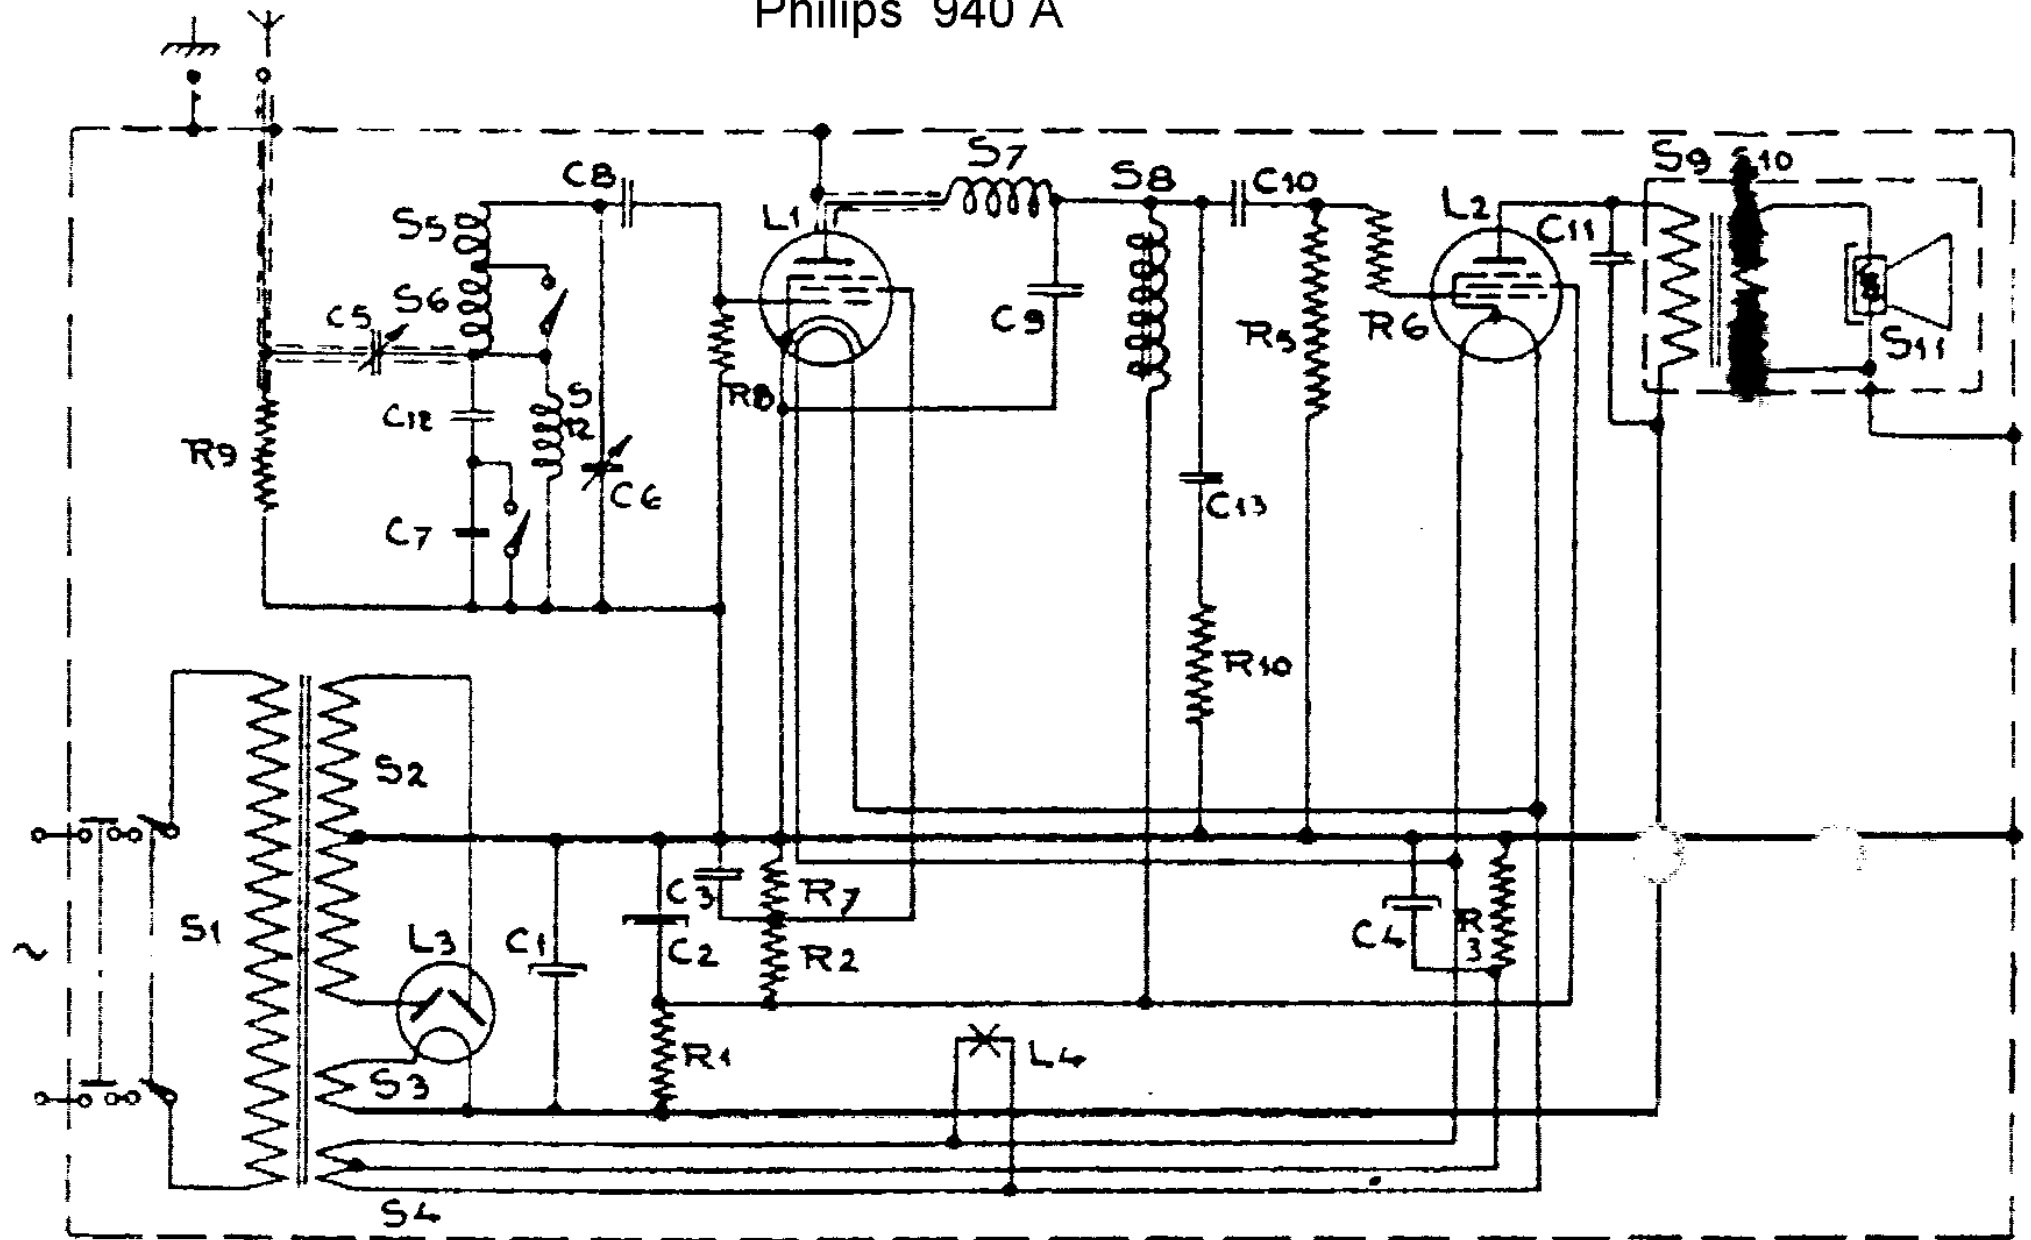

# Philips 940 A RESISTANCES.

| Designation | Resistances. | Code No.   |
|-------------|--------------|------------|
| R1          | 4000 Ohm     | 28.770.310 |
| R2          | 0.2 M.Ohm    | 28.770.480 |
| R3          | 640 Ohm      | 28.770.880 |
| R5          | 1 M.Ohm      | 28.770.550 |
| R6          | 0.1 M.Ohm    | 28.770.450 |
| R7          | 40000 Ohm    | 28.770.410 |
| R8          | 2 M.Ohm      | 28.770.580 |
| R9          | 0.2 M.Ohm    | 28.770.480 |
| R10         | 0.4 M.Ohm    | 28.770.510 |

## CONDENSERS.

|     |                  |            |
|-----|------------------|------------|
| C1  | 32 $\mu$ F       | 28.180.011 |
| C2  | 32 $\mu$ F       | 28.180.011 |
| C3  | 0.1 $\mu$ F      | 28.199.090 |
| C4  | 25 $\mu$ F       | 28.180.020 |
| C5  | 0-500 $\mu\mu$ F | 25.867.080 |
| C6  | 0-630 $\mu\mu$ F | 28.210.200 |
| C7  | 1000 $\mu\mu$ F  | 28.190.230 |
| C8  | 50 $\mu\mu$ F    | 28.190.100 |
| C9  | 125 $\mu\mu$ F   | 28.190.140 |
| C10 | 20000 $\mu\mu$ F | 28.199.020 |
| C11 | 1000 $\mu\mu$ F  | 28.199.650 |
| C12 | 10000 $\mu\mu$ F | 28.198.990 |
| C13 | 800 $\mu\mu$ F   | 28.190.220 |

# Philips 940 A VOLTAGES AND CURRENTS

|     | L1 (SP4). | L2 (PM24M). |      |
|-----|-----------|-------------|------|
| Va  | 202       | 203         | Volt |
| Vg1 | 27.5      | 197         | Volt |
| -Vg | —         | 15          | Volt |
| ia  | 0.73      | 21.2        | mA   |
| ig1 | 0.26      | 4.3         | mA   |