






**Jura 656**

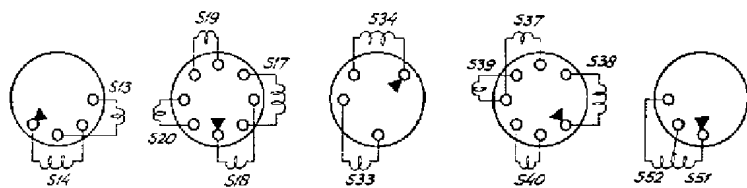

**B1-B3**



**B5**




**B6**

13,7—51 m  
175—585 m  
708—2000 m  
656A = 468 ke/s  
656A-19 = 452 ke/s

9678R-50, Z = 5 Ω  
110 V, 125 V, 145 V  
200 V, 225 V, 245 V  
52 watt

175—585 m B	708—2000 m B	175—585 m C
<p>C6, C7 + 15°</p> <p>VOL max.</p> <p>1650 ke/s</p> <p>C38 max.</p> <p>C 18 max. + 0999159.0</p>	<p>C7</p> <p>-25 pF—αB2</p> <p>160 ke/s</p> <p>160 ke/s</p> <p>C6, C7 160 ke/s</p> <p>C7</p> <p>C49 max.</p>	<p>C6, C7 max.</p> <p>VOL max.</p> <p>452 ke/s</p> <p>5100 min.</p>
<p>175—585 m D</p> <p>1154 ke/s</p> <p>C6, C7 1154 ke/s</p> <p>260 m</p>		

15° = 09 992 44.0

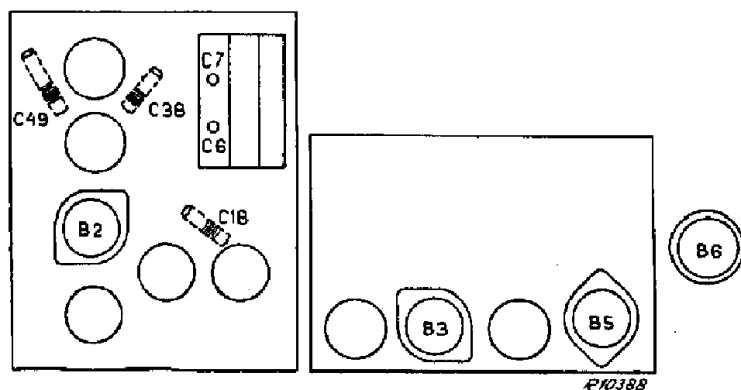

	B2	B3	B5	B6
	ECH 21	ECH 21	EBL 21	AZ 1
Va	αH 240 αT 130	αH 240 αT 60	260	
Vg2	100	95	240	
Ia	αH 2,7 αT 4,2	αH 7,5 αT 1,5	28	
Ig2	5,5	3,5	3	

Jura 656

C1	50 pF	49 020 01.0	R3	39 Ω	49 375
C2	30 pF	28 212 52.0	R11	0,5 MΩ	49 470
C3	50 pF	49 055 11.0	R21	50000 Ω	49 470
C6	11.490 pF	28 212 06.0	R31	0,47 MΩ	49 375
C7	11.490 pF	49 055 22.0	R32	39000 Ω	49 375
C14	39 pF	49 055 19.0	R33	22000 Ω	49 375
C18	32 pF	28 212 06.0	R34	68000 Ω	49 375
C19	33 pF	28 212 06.0	R35	39 Ω	49 375
C20	18 pF	49 057 16.0	R41	47000 Ω	49 375
C38	32 pF	49 057 52.0	R42	0,1 MΩ	49 375
C40	39 pF	49 057 41.1	R43	47000 Ω	49 375
C47	450 pF	28 212 08.1	R45	0,68 MΩ	49 375 58.0
C47	485 pF	49 055 20.0	R46	1,5 MΩ	49 376 62.0
C49	200 pF	49 055 27.0	R47	0,82 MΩ	49 375 59.0
C51	103 pF	49 127 59.0	R48	0,82 MΩ	49 375 59.0
C52	103 pF	49 129 82.0	R50	1,5 MΩ	49 376 62.0
C61	103 pF	49 055 28.0	R51	22000 Ω	49 375 40.0
C62	103 pF	49 128 61.0	R60	100 Ω	49 375 12.0
C81	22 pF	49 055 53.0	R81	47000 Ω	49 375 44.0
C82	82 pF	49 055 27.0			
C83	22000 pF	49 127 61.0			
C85	4700 pF	49 128 37.0			
C100	100 pF	49 128 63.0			
C101	47000 pF	49 129 85.0			
C102	470 pF	49 129 90.0			
C103	82 pF				
C104	47 pF				
C120	47000 pF				
C121	47000 pF				
C122	10000 pF				
C126	2200 pF				
C127	47000 pF				
C128	0,1 pF				
C130	47000 pF				
C131	22000 pF				

S1, S2, S3, S4	A1 057 42.0	S51, S52, C51	A1 037 19.1
Z1	08 100 99.1	S53, S54, S55, C52	A1 037 18.1
S13, S14	A1 038 27.0	S61, S62, S63	A1 037 20.2
S17, S18, S19, S20	A1 037 16.1	S64, C61, C62	A1 215 23.1
S33, S34	A1 038 28.0	S100, S101, C140	
S37, S38, S39, S40	A1 037 17.2		
S51, S52, C51	A1 037 33.1		
S53, S54, S55, C52	A1 037 34.1		
S61, S62, S63	A1 037 61.0		
S64, C61, C62	49 981 04.0		
S76	A1 001 66.3		
S77	A1 081 84.1		
S81, S82			