

RÉSISTANCES		
R1	20kΩ ± 10% 1/4W	60192
R2	50Ω ± 10% 1/4W	45010
R3	20kΩ ± 10% 1/2W	61244
R4	30kΩ ± 10% 1/2W	45404
R5	40kΩ ± 10% 1W	45178
R6	100kΩ ± 10% 1/4W	46574
R7	50kΩ ± 10% 1/4W	45013
R8	50Ω ± 10% 1/4W	45010
R9	1MΩ ± 10% 1/4W	46815
R10	600kΩ ± 10% 1/4W	63218
R11	2kΩ ± 10% 1/4W	46083
R12	150kΩ ± 10% 1/4W	60727
R13	10kΩ ± 10% 2W	62396
R14	10kΩ ± 10% 2W	62396
R15	180Ω ± 5% 1W	64707
R16	100kΩ ± 10% 1/4W	46574
R17	2MΩ ± 10% 1/4W	46573
R18	200kΩ ± 10% 1/4W	46536
R19	2MΩ ± 10% 1/4W	46572
R20	1MΩ ± 10% 1/4W	46815
R21	1MΩ ± 10% 1/4W	46815
R22	2MΩ ± 10% 1/4W	46572
R23	2MΩ ± 10% 1/4W	46572
R24	30Ω ± 10% 1/4W	45009
R25	500kΩ ± 10% 1/4W	46575
R26	20kΩ ± 10% 1/4W	60192

IS. Transfo de sortie 62924


IA. Transfo d'alimentation 64497
ou
Transfo d'alimentation 25 64681

MF1. Transfo MF.1 63562

MF2. Transfo MF.2 63563


CV1
CV2. Condensateur variable 64515

MF1. Filtre MF 63485

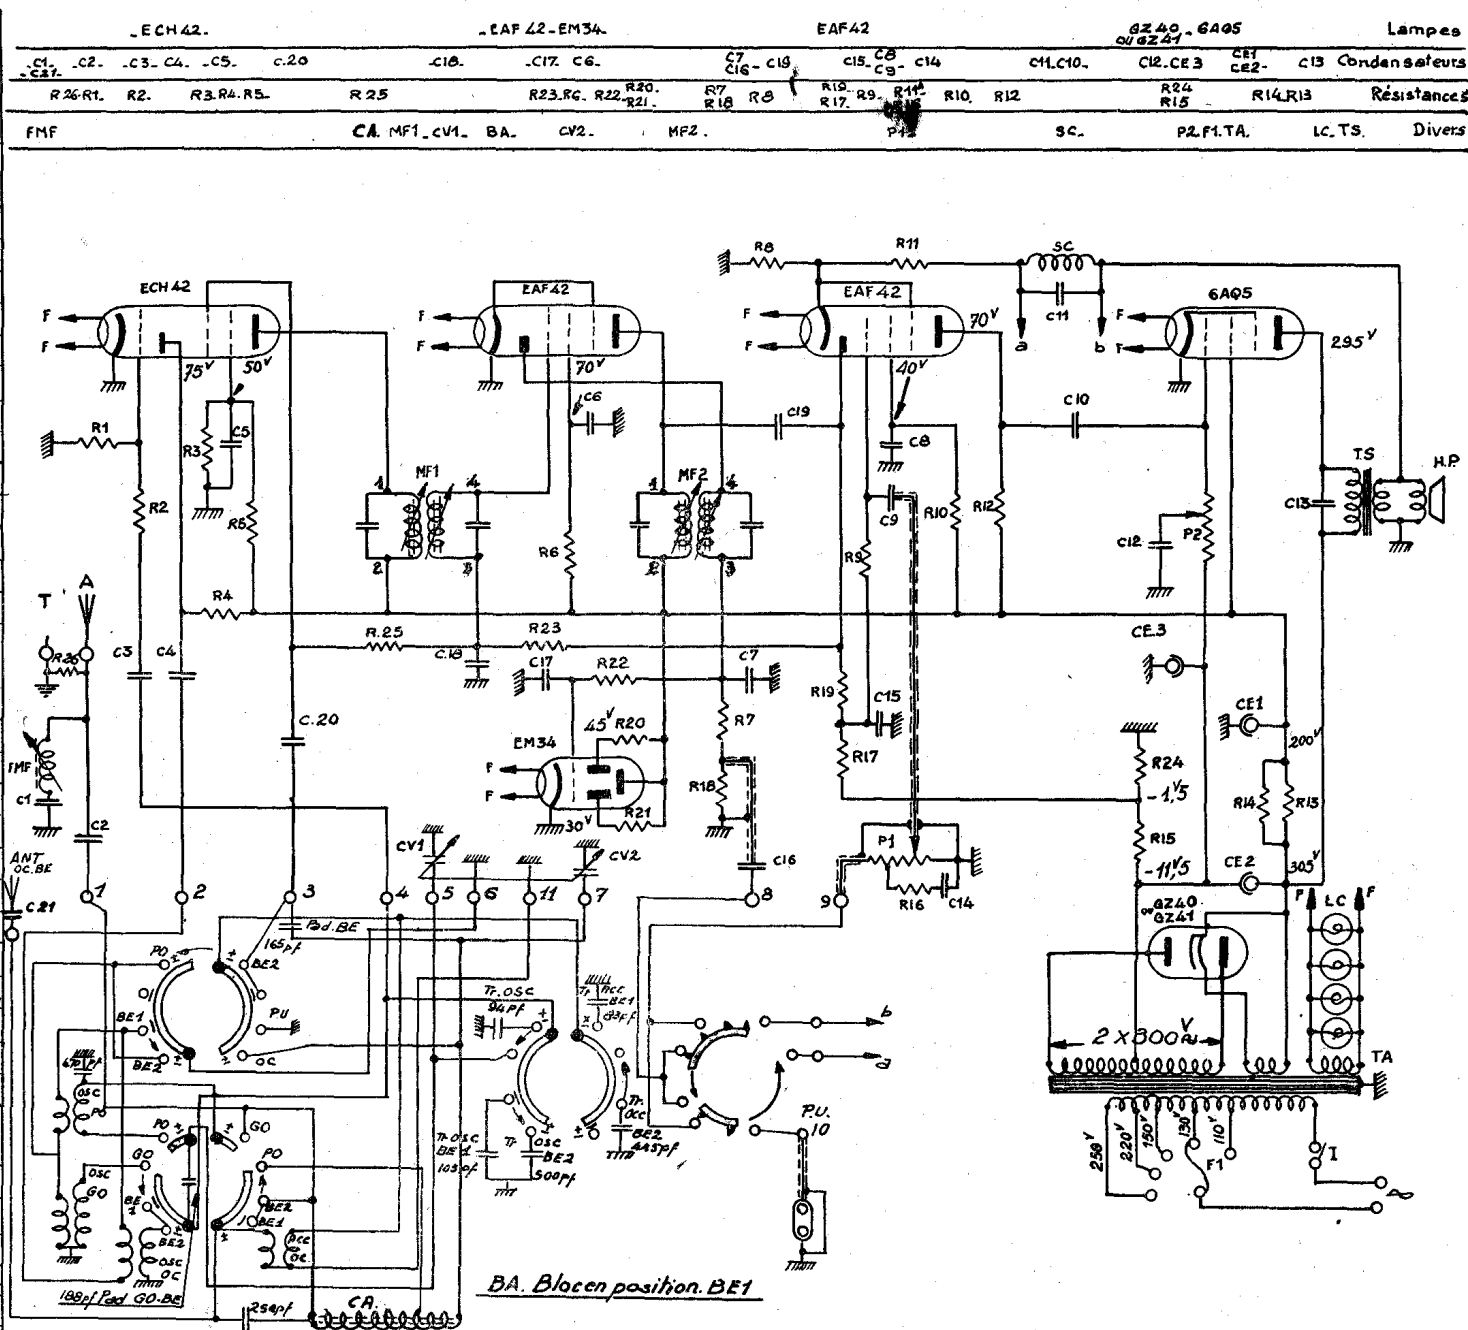

BA. Bloc en position. BE1

BROCHAGE DES LAMPES (Vue de dessous)

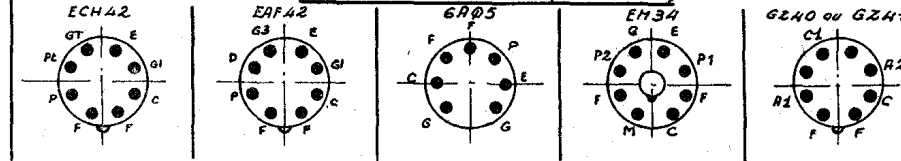

Condensateurs		
C1	30pF ± 10% 500V mica	44242
C2	500pF ± 10% 500V mica	41548
C3	50pF ± 10% 500V mica	44419
C4	500pF ± 10% 500V mica	41548
C5	5000pF ± 10% 1500V papier	42736R
C6	0.1μF ± 10% 1500V papier	41416R
C7	200pF ± 10% 1500V mica	61041
C8	0.25μF ± 10% 1500V papier	45618R
C9	2500pF ± 10% 1500V papier	62249
C10	5000pF ± 10% 1500V papier	42736R
C11	3500pF ± 10% 1500V papier	60605
C12	5000pF ± 10% 1500V papier	41727R
C13	2000pF ± 10% 1500V papier	45618R
C14	5000pF ± 10% 1500V papier	60605
C15	0.1μF ± 10% 1500V papier	41416R
C16	2500pF ± 10% 1500V papier	62249
C17	2500pF ± 10% 1500V papier	62249
C18	5000pF ± 10% 1500V papier	42736R
C19	10pF ± 10% 500V mica	60830
C20	500pF ± 10% 500V mica	41548
C21	500pF ± 10% 500V mica	41548

Condens.-electrolytiques		
CE1	50μF ± 50% 320V/350V	62727
CE2	35μF ± 50% 450V/500V	62440
CE3	10μF ± 50% 25/30V	64880

SC Self 220MH 61755

BP Bloc d'accord 64905

CA Cadre 64899

PI Potentiometre 500kΩ

1 Prise 200V avec interrupteur 64680

P2 Potent 500kΩ s/interr 64581

LC Lampe 6V3 0R3 41036

M Fusible 1 Amp 62880

HP Haut parleur 60882

HP Haut. Parleur (pol. reduit) 64636