


MODEL D924C

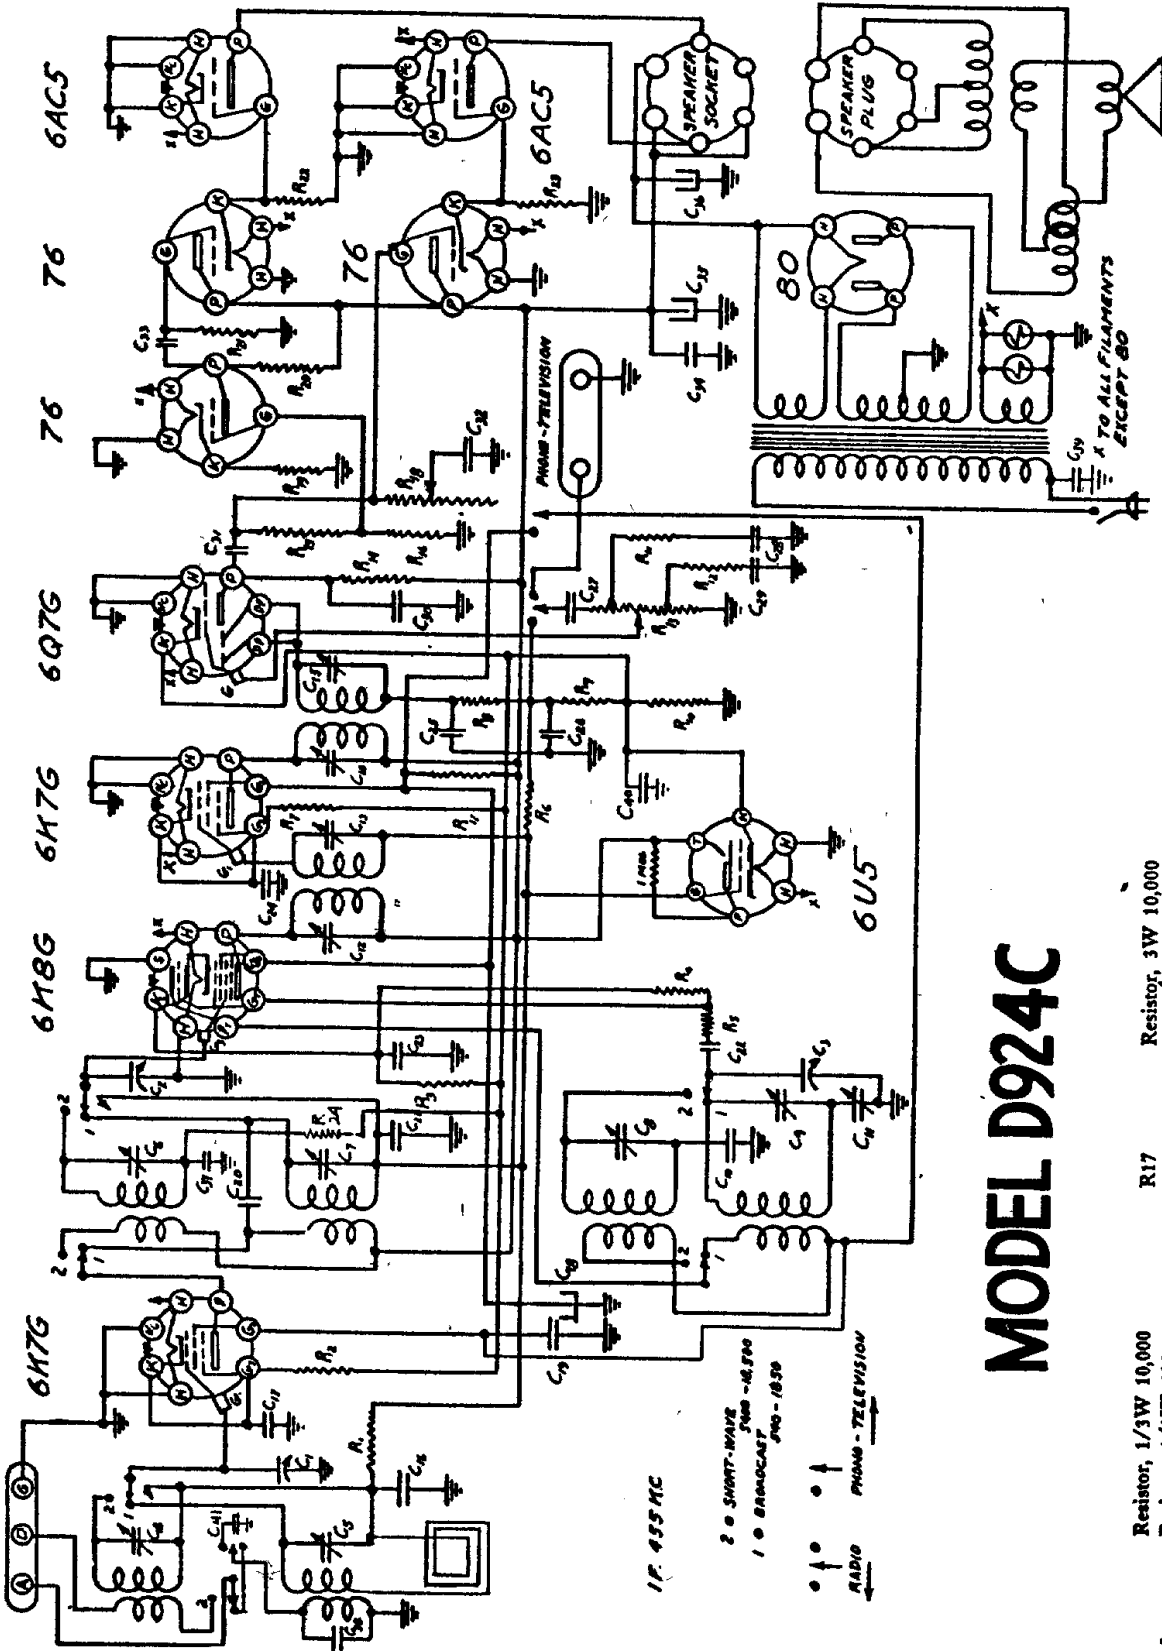

- | Part Number | Description | Part Number | Description |
|-------------|--------------------------------|--------------|-----------------------------------|
| R1 | Resistor, 1/3W 10,000 | R17 | Resistor, 3W 10,000 |
| R2,3 | Resistor, 1/3W 300 | R18 | Resistor, Tone Control, 500,000 |
| R4,20 | Resistor, 1/3W 50,000 | R19 | Resistor, 1/3W 5,000 |
| R5 | Resistor, 1/3W 200 | R21 | Resistor, 1/3W 500,000 |
| R6 | Resistor, 1/3W 2,000,000 | R24 | Resistor, 1/3W 75,000 |
| R7 | Resistor, 1/3W 400 | | Condenser, Mech. Tuner |
| R8 | Resistor, 1/3W 50,000 in IF | C1,2,3, | Condenser, Trimmer 3-20 MMF |
| R9 | Resistor, 1/3W 1,000,000 in IF | C4,5,6,7,8,9 | Condenser Padder 3300 MMF |
| R10 | Resistor, 1/3W 70 | C10 | Condenser Adj. Padder |
| R11 | Resistor, 1/3W 300,000 | C11 | Condenser, I.F. Trimmer |
| R12,22,23 | Resistor, 1/3W 25,000 | C12,13,14,15 | Condenser .05-200 |
| R13 | Volume Control, 1/3W 3,000,000 | C16,17,21 | Condenser Electrolytic 20 MFD 150 |
| R14 | Resistor, 1/3W 200,000 | C18 | Condenser paper .1-400 |
| R15 | Resistor, 1/3W 400,000 | C19 | Condenser (Wire) 2.5 MMF |
| R16 | Resistor, 1/3W 100,000 | C20 | Condenser, Mica 50 MMF |
| | | C22,38 | |
| | | | Condenser, paper .1-200 |
| | | | Cond. Mica, 100 MMF in I.F. |
| | | | Condenser, paper .002-600 |
| | | | Condenser, paper .03-200 |
| | | | Condenser, Mica 100 MMF |
| | | | Condenser, paper .005-600 |
| | | | Condenser, paper .01-600 |
| | | | Condenser, paper .2-400 |
| | | | Condenser, Elect. Wet 16 MFD |
| | | | Condenser Elect. Wet. regulator |
| | | | Condenser, paper .02-600 |
| | | | Condenser, Mica .0012 |
| | | | Condenser, Elect. Dry, 250 MFD 2V |
| | | | Condenser, Elect. Dry, 250 MFD 2V |