


foreign tube interchangeability guide

This valuable 24-page booklet lists all foreign radio and special purpose tubes with their U.S. substitution equivalents.

See inside front cover for important
details on the 1960 Radio-Electronic MASTER.

it's here!

1960

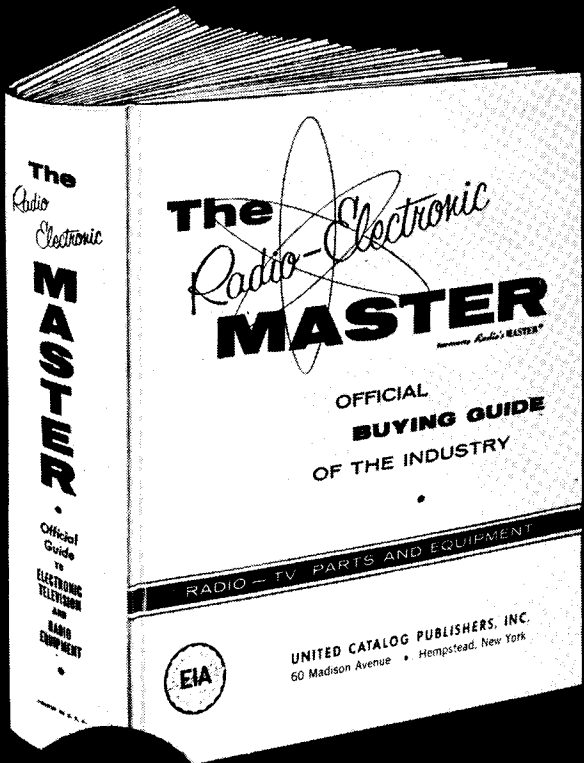

\$3.50
At parts distributors

\$4.50 in Canada

1551 pages

RADIO-ELECTRONIC **MASTER**

BIGGER ... more information than ever.
Packed with the latest information on radio-TV-
electronic parts and equipment stocked by
electronic distributors.

- NEW** Printed circuit components
- NEW** Stereo equipment
- NEW** Color TV service instruments
- NEW** Miniature and subminiature
components
- NEW** Silicon rectifiers
- NEW** Transistor types
- NEW** Citizen's band, SSB and mobile
ham gear
- NEW** Microwave and telemetering
components and equipment
- NEW** Automatic test equipment
- NEW** Remote control radio equipment

plus every new electronic product for
servicing, experimenting, design,
industrial and military applications.

1551 PAGES ... puts the complete
descriptions, illustrations, specifications of more
than 175,000 items at your fingertips —
fully indexed and systematically organized in 28
product sections for fast and easy reference.

foreign tube interchangeability guide

X-AVAILABLE D-DISCONTINUED

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson X) (Thomson *) (Brown Boveri **)	AMERICAN TYPE
A2521				X					
AB2			X			X			
ABC1			X			X			
ABL1			X			X			
AC0114						X			
AC701	X								
AF3	X		X			X			
AF7	X		X			X			
AF22-10						X			
AF31-10						X			
AGR9950		X							5869
AGR9951		X							5870
AK2			X			X			
AL1			X						
AL4	X		X			X			
AL13-36						X			
AL22-10						X			
AL31-10						X			
AN1						X			
ATL2-1							#		
ATL5-1							#		5667
ATL10-2							#		
ATL10-3							#		
ATL20-1							#		
ATL35-1							#		
AW13-36						X			
AW17-20						X			
AW21-80						X			
AW22-10						X			
AW36-20						X			
AW56-21						X			
AW36-48						X			
AW36-80						X			
AW13-80						X			17BTP4
AW53-80						X			
AX1-125A		X							6155
AX1-250A		X							6156
AX50			X						
AX9900		X							5866
AX9901		X							5867
AX9902		X							5868
AX9903		X							5894
AX9904		X							5923
AX9904R		X							5924
AX9906		X							6077
AX9906R		X							6076
AX9907		X							6075
AX9907R		X							6076
AX9908		X							6079
AX9909		X							6083
AX9910		X							6252
AX9911		X							6268
AX9922		X							6279
AZ1	X		X			X			

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-x) (Thermosen-y) (Brown Boveri-z)	AMERICAN TYPE
AZ4			X			X			
AZ11	X		X						
AZ12	X		X			X			
AZ31			X			X			
AZ41	X		X			X			
AZ50			X						
BA9-20						X			
BA16-10						X			
BTL1-1							#		
BTL3-1							#		
BTL6-1							#		
BTL15-1							#		
BTL25-1							#		
BTL50-1							#		
BTW6-1							#		
BTW15-1							#		
BTW25-1							#		
BTW50-1							#		
C3M	X								
C8			X						
C10			X						
C12			X						
CBL1			X			X			
CBL6			X						
CBL31						X			
CCA	X								
CCH35						X			
CF3			X						
CF7	X		X						
CF50			X						
CK1			X						
CL4	X		X			X			
CL33						X			
CXT1						X			
CXT2						X			
CY1						X			
CY2			X						
CY31						X			
D3A	X								
DA90			X			X		1A3	
DAC21			X			X			
DAC32						X		1H5GT	
DAF11	X								
DAF10			X						
DAF11			X						
DAF70						X			
DAF91	X		X			X		1S5	
DAF92			X					1W5	
DAF96	X		X			X		1AH5	
DBL-1						X			
DBL-2						X			
DB7-5						X			
DB7-6						X			
DB7-36						X		3WP11	
DB13-2						X			
DB13-3L						X		5ADP11	
DB16-22						X			
DC70						X		6375	

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mutlard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thermosem-X) (Brown Boveri-#)	AMERICAN TYPE
DC90	x		x			x	x		
DC96	x								
DCC90			x			x		3A5	
DGG6/18		x						6C93	
DGG6/6000		x						5869	
DGG7/100B		x						6786	
DGG12/30		x						5870	
DGH11	x								
DF-11	x								
DF-21			x			x			
DF-22			x			x			
DF-33						x		1N5GT	
DF-60						x		5678	
DF-61						x			
DF-62						x		1AD4	
DF-63						x			
DF-64						x			
DF-66						x			
DF-70						x			
DF-72						x			
DF-73						x			
DF-91	x		x			x		1T4	
DF-92	x		x			x		1L4	
DF-96	x		x			x	x	1AF4; 1AJ4	
DF-97	x		x			x		1AN5	
DF-703	x							CK5886	
DF-904	x							1U4	
DGA-1						x			
DGA-2						x			
DG7-5						x		3ALP1	
DG7-6						x			
DG7-31						x			
DG7-32						x		3AMP1	
DG7-36						x		3WP1	
DG13-2						x		5CP1A	
DG13-34						x		5ADP1	
DG16-22						x		7AHP1	
DH3-91						x		1CP1	
DH7-91						x		3AFP1	
DH10-94						x		4EP1	
DH13-97						x		JBKP1	
DK21			x			x			
DK32						x		1A7GT	
DK40	x		x			x			
DK91	x		x			x		1R5	
DK92	x		x			x	x	1AC6; 1L4	
DK96	x		x			x		1AB6	
DL-11	x								
DL-21			x			x			
DL-33						x		3Q5GT	
DL-35						x		1C5GT	
DL-36						x		1Q5GT	
DL-41	x		x			x			
DL-64						x			
DL-66						x			
DL-68						x			
DL-69						x			
DL-70						x		6373	

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thornosen *) (Brown Boveri-#)	AMERICAN TYPE
DL-71						X			
DL-72						X			
DL-73						X			
DL-75						X			
DL-91						X		1SL	
DL-92	X		X			X		3SL	
DL-93			X			X		3AL	
DL-94	X		X			X	X	3VL	
DL-95			X			X		3OL	
DL-96	X		X			X		3CL	
DL-98						X		3BL	
DL-620						X		5672	
DL-907	X								
DLL21			X			X			
DM-70	X	X	X			X		1K3	
DM-71	X	X	X					1N3	
DM160						X		6977	
DPL-1						X			
DPL-2						X			
DP7-5						X			
DP7-6						X			
DP13-2						X			
DP13-24						X			
DP16-22						X		5ADP7	
DQ2							#	866A	
DQ4							#	872A	
DQ5							#		
DQ6							#	869B; 6508	
DQ7							#	857B	
DW2						X			
DWL-350						X			
DWL-500						X			
DX2							#	3B28	
DY70						X		5642	
DY-80	X								
DY-86	X		X					1S2	
DY-87	X	X	X					1S2A	
E1T		X				X		6370	
E80CC		X				X		6085	
E80F		X				X		6084	
E80L		X				X		6227	
E80T		X							
E81L		X				X		6686	
E83F		X				X		6689	
E88CC	X	X				X		6922	
E90CC	X	X				X		5920	
E91H		X				X		6687	
E92CC	X	X				X			
E180CC						X		7062	
E181CC						X		7118	
E182CC						X		7119	
E180F	X	X				X		6688	
EAA-EB91							X	6AL5	
EA50			X			X		2B35	
EA52						X		6923	
EA76						X		5647; 6LE9	
EAA91	X		X			X		6AL5	
EAA90LS	X								

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson X) (Peromoxen *) (Brown Boveri-H)	AMERICAN TYPE
EABC80	x		x			x	x		6AK8; 6H8; 6T8
EAC91						x			
EAF41						x			
EAF42	x		x			x			6CT7
EB-1			x			x			
EB-11	D								
EB31			x			x			6H6G
EB11			x			x			
EB91						x			6AL5
EBC-3			x			x			
EBC-11	x								
EBC33			x			x			
ECC41	x		x			x			6CV7 6BD7A
EBC81			x			x			
EBC90			x			x			6AT6
EBC91	x		x			x	x		6AV6
EBF 2			x			x			
EBF11	D								
EBF15	x								
EBF32			x			x			
EBF35			x						
EBF80	x		x			x	x		6N8
EBF83	x		x			x			6DR8
EBF89	x	x	x			x	x		6DC8
EBL1			x			x			
EBL21			x			x			
EBL31						x			
EC31						x			
EC50						x			
EC52						x			
EC53						x			
EC54						x			
EC56						x			
EC57						x			
EC70						x			5861
EC71						x			
EC80			x						6QL
EC81			x	x		x			6R1
EC90			x			x			6C4
EC91			x			x			6AQL
EC92	x		x			x	x		6AB4
EC95						x			6ER5
EC806S	x								
EC903	x								
ECC31						x			
ECC32						x			
ECC33				x		x			
ECC34						x			
ECC35				x		x			6SG7
ECC40				x		x			
ECC70						x			
ECC81	x	x	x		x	x	x		12AT7
ECC82	x	x	x		x	x			12AU7
ECC83	x	x	x		x	x	x		12AX7
ECC84	x		x			x	x		6CW7
ECC85	x	x	x		x	x	x		6AQ8
ECC86	x								
ECC88	x	x	D		x	x			6DJ8

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Theromosen *) (Blower Boveri #)	AMERICAN TYPE
ECC91		X	X			X			6J6
ECC801S	X								6201; 6060
ECC802S	X								6067; 6189
ECF1			X						
ECF2			D			X			
ECF12	X								
ECF80	X		X			X			6BL8
ECF82	X					X	X		6U8
ECF83	X								
ECH3			X			X			
ECH4			X						
ECH21			X			X			
ECH22	X								
ECH33			X			X			
ECH35			X			X			6E8
ECH41			X			X			
ECH42	X		X			X			6CU7; 6C9
ECH81	X		X			X	X		6AJ8
ECH83	X		X			X			6DS8
ECL11	X		X						
ECL80	X		X			X	X		6AB8
ECL82	X	X	X			X	X		6MB8
ECL83						X			
ECL84						X			
ECL113	X								
ECR30						X			
ECR35						X			
ECR35P						X			
ECR57						X			
ECR60						X			
EF6(N)			X						
EF9			X			X			
EF11	D								
EF12	D								
EF13	D								
EF14	X								
EF15	X								
EF22			X			X			7G7
EF36			X			X			
EF37						X			
EF37A			X			X			
EF39			X			X			
EF40			X			X			
EF41	X		X			X			6CJ5
EF42			X			X			
EF43			X						
EF50			X			X			
EF54						X			
EF55			X			X			
EF70						X			6L87
EF71						X			
EF72						X			
EF73						X			6L88
EF74						X			6391
EF80	X		X			X	X		6BX6
EF83	X								
EF85	X		X			X	X		6BY7
EF86	X	X	X		X	X	X		6267; 6CF8
EF89	X		X			X	X		6DA6

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thornosen-X) (Brown Boveri-X)	AMERICAN TYPE
EF91			X			X		6AM6	
EF92			X			X		6CQ6	
EF93	X		X			X		6BA6	
EF94	X		X			X		6AU6	
EF95			X			X		6AK5	
EF97	X		X					6ES6	
EF98	X		X			X		6ET6	
EF110	X								
EF730						X			
EF731						X			
EF732						X			
EF731L						X			
EF800	X								
EF802	X								
EF804	X								
EF804S	X								
EF805S	X								
EF806S	X								
EFM1			X						
EFM3						X			
EFM11	X		X						
EFP60			X			X			
EH90	X		X					6CS6	
EH900S	X								
EK2			X			X			
EK32						X			
EK90	X		X			X		6BE6	
EL2			X			X			
EL3(N)			X						
EL5			X						
EL11	X		X						
EL12	X		X			X			
EL12S	X								
EL13	X					X			
EL31						X			
EL32						X			
EL33			X			X		6AG6; 6M6G	
EL34	X	X	X		X	X	X	6CA7	
EL34MP			X		X	X		6CA7	
EL35						X			
EL36			X			X		6CM5	
EL37			X		X	X		6L6/6L6GB	
EL37MP			X		X	X			
EL38			X			X		6CN6	
EL41	X		X			X		6CK5	
EL42			X			X			
EL50			X						
EL51			X						
EL60			X						
EL71						X			
EL81			X			X		6CJ6	
EL82			X					6DY5	
EL83			X			X		6CK6	
EL84	X	X	X		X	X	X	6BQ5	
EL84(MP)			X		X				
EL85			X			X		6BN5	
EL86	X	X	X			X		6CW5	
EL90	X		X			X		6AQ5	
EL91			X			X		6AM5	

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mutlard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-x) (Thermosen-*) (Brown Boyer-#)	AMERICAN TYPE
EL95	x		x			x	x	6DL5	
EL131						x			
EL131MP						x			
EL152	x								
EL153	x								
EL156	x								
EL360						x			
EL803	x								
EL803S	x								
EL804	x								
EL821						x		6CH6	
EL822						x			
EM1			x			x			
EM4			x			x			
EM11	x								
EM34		x	x			x		6CD7	
EM35	x							6T5G	
EM71A	x								
EM80	x	x	x			x	x	6BR5	
EM81	x	x	x			x		6DA5	
EM84	x	x	x			x	x	6FG6	
EM801	x								
EN31						x			
EN32						x		6574; 2050	
EN70						x		56L3	
EN91						x		2D21	
EN92						x		5696	
EN93						x		6D4	
EQ80			x			x		6BE7	
EY51	x		x			x		6X2	
EY70						x			
EY80			x			x		6T3	
EY81		x	x			x		6R3	
EY82			x			x		6N3	
EY84						x		6374	
EY86	x		x			x		6S2	
EY87			x					6S2A	
EY91						x			
EZ2			x			x			
EZ11	D								
EZ12	x								
EZ35						x		6X5GT	
EZ40			x			x		6BT4	
EZ41			x			x			
EZ80	x	x	x		x	x	x	6V4	
EZ81	x	x			x	x	x	6CA4; 6BT4	
EZ90			x			x		6X4	
EZ150	x								
FG2A						x			
FG4						x			
FG13						x			
FG13C						x			
FL152	x								
FTL3-1							#		
FTL3-2							#		
FTL8-1							#		
FTW3-1							#		
FTW8-1							#		

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens Halske)	STATE LABS (Ericsson-X) (Thomson) (Brown Boveri) #	AMERICAN TYPE
FWL/500						X			
FWL/800						X			
FZ11GH	X								
FZ11GS	X								
FZ11VH	X								
FZ11VS	X								
FZ12GH	X								
FZ12GS	X								
FZ12VH	X								
FZ12VS	X								
FZ21GS	X								
FZ21VS	X								
FZ9011G	X								
FZ9011V	X								
FZ9012G	X								
FZ9012V	X								
GZ30						X		5ZLGT	
GZ32			X			X		5VLGA	
GZ33						X			
GZ34		X	X		X	X	X	5ARL	
GZ37						X			
HBC90			X			X		12AT6	
HBC91			X			X		12AV6	
HCH81								12AJ7	
HF93			X			X		12BA6	
HF94			X					12AU6	
HK90			X			X		12BE6	
HL13						X			
HL13C						X			
HL92			X			X		50C5	
HL94			X					30A5	
HVR2						X			
HVR2A						X			
HY90			X			X		35W4	
HZ90			X						
IL1	X								
IL5	X								
IOG-1						X			
IWL/350						X			
IWL/500						X			
JP2-2-5W						X		7222	
JP8-02						X			
JP9-01						X			
JP9-2.5						X		7028	
JP9-7						X		2JL2	
JP97A						X			
JP9-7B						X			
JP9-7D						X			
JP9-15						X		2JL2A	
JP9-75						X		6972	
JP9-80						X		4J52	
JP9-80A						X		4J52A	
JP9-250						X		4J50	
JP9-250A						X		4J78	
JP16-10						X			
JPT6-01						X			
JPT8-01						X			
JPT9-01						X			

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) Theromosen, Brown Boveri, H.	AMERICAN TYPE
JPT9-02						X			
JPT9-60						X			2J51A
KB2						X			
KBC1						X			
KBC32						X			
KCF30						X			
KF3						X			
KF35						X			
KK2						X			
KK32						X			
KL4						X			
KL35						X			
KL32						X			
KS7-85						X			2K26
KS7-85A						X			5976
KS9-20						X			723A/B
KS9-20A						X			2K25
KT9-150W						X			
KT32									25L6GT
KT-55				X					
KT-61				X					6AG6
KT-66				X					6L6; 5881
KT-88				X					6550
KU25						X			KU25
LA1-2						X			
LA1-250						X			
LA9-3						X			
LBL-2						X			
LSD-2						X			
LSD-3						X			
LSD-4						X			
LSD-5						X			
LSD-7						X			
LSD-8						X			
LSD-10						X			
LSD-11						X			
LSD-15						X			
LSD-17						X			
LSD-18						X			
LSD-21						X			
M8079						X			6058
M8080						X			6100; 6CLWA
M8081						X			6101; 6J6WA
M8082						X			6516
M8083						X			6064
M8091						X			6113
M8096						X			6062
M8097						X			
M8098						X			
M8099						X			
M8100						X			5654; 6AK5W 6096
M8132						X			
M8133						X			
M8136						X			6189; 12AU7WA
M8137						X			6057
M8140						X			

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thornsen-*) (Brown Boveri-#)	AMERICAN TYPE
M8111						X			
M8112						X			
M8114						X			
M8119						X			
M8157						X			
M8161						X		6065	
M8162						X		12AT7WA	
M8163						X			
M8167						X		700L	
M8178						X			
M8179						X			
M8180						X			
M8184						X			
M8190						X		5783WA	
M8195						X			
M8196						X		5725; 6A56W	
M8204						X		5727; 2D21WA	
M8206						X			
M8207						X			
M8208						X			
M8212						X		5726; 6AL5W 6097	
M8214						X			
M8223						X		0A2WA	
M8224						X		0B2WA	
M8232						X		6J1WA	
M8234						X			
M8237						X			
M8245						X		6005; 6AQ5W	
MB22-75						X			
MC6-16						X			
MC13-16						X			
ME1200						X			
ME1200AA						X			
ME1201						X			
ME1201AA						X			
ME1100						X			
ME1101						X			
ME1102						X			
ME1103						X			
ME1104						X			
MF13-1						X		5F7A	
MF22-75						X			
MF31-22						X			
MF31-55						X			
MF31-95						X			
MF41-10						X			
MG8	X								
MG20	X								
MG2000	X								
ML31-22						X			
MP13-10						X			
MS1005						X			
MT5545						X		5545	
MW6-2						X			
MW13-35						X		5F14A	

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-x) (Thermosen-x) (Brown Boyer-x)	AMERICAN TYPE
MW22-22						X			
MW31-74						X			
MW36-24						X			
MW36-144						X			
MW36-67						X			
MW41-1						X			
MW43-64						X			
MW43-67						X			
MW43-69						X		17BQPL	
MW43-80						X			
MW53-20						X			
MW53-80						X		21CLPL	
MX108						X			
MX112						X			
MX113						X			
MX118						X			
MX119						X			
MX120						X			
MX122						X			
MX123						X			
MX124						X			
MX124/01						X			
MY3-275						X			
MZ1-75						X			
MZ1-100						X			
MZ2-200						X			
OALG	X								
PL20-1A							#	813	
PABC80	X		X			X		9AK8	
PC86	X								
PCC84	X		X			X		7AN7	
PCC85	X		X			X	X	9AQ8	
PCC88	X		X			X		7DJ8	
PCC89						X			
PCF80	X		X			X		8A8; 9A8	
PCF82	X		X			X		9UBA	
PCL81	X								
PCL82	X		X			X	X	16A8	
PCL83						X			
PCL84	X		X			X		15DQ8	
PE1/100								6083	
PENAL						X			
PENBL						X			
PENLDD						X			
PENLVA						X			
PEN36V						X			
PL21			X					2D21	
PL33						X			
PL36	X		X			X		25E5	
PL38						X			
PL38M						X			
PL81	X		X			X		21A6	
PL82	X		X			X		16A5	
PL83	X		X			X		15A6	
PL84	X		X			X		15CW5	
PL87	X							16A5	
PL820						X			

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SOMOTONE (Siemens-Halske)	STATE LABS (Ericsson-x) (Thomson *), (Brown Boveri-#)	AMERICAN TYPE
PM2A						X			
PM2H1						X			
PM12M						X			
PM22A						X			
PM22D						X			
PM21A						X			
PM21M						X			
PM8L	X								
PM202						X			
PV1-35						X			
PY31						X			
PY32						X			
PY80			X			X		19X3	
PY81			X			X		17Z3	
PY82			X			X		19Y3	
PY83	X							17Z3	
PZ30						X			
Q160-1							#	LD21/L-125A	
Q100-1							#	L-100A	
QB3/300								6155	
QB5/1750								6079	
QBE03/20								6252	
QBL5/3500								6076	
QBW5/3500								6075	
QP22B						X			
QQE06/40								589L	
QQV02-6						X		6939	
QQV03-10						X		6360	
QQV03-20A						X		6252	
QQV04-15						X		832A	
QQV06-40						X			
QQV06-40A						X		589L	
QQV07-40						X		829B	
QQV5-P10						X		3E29	
QQZ04-15						X		5895	
QV03-12						X		5763	
QV04-7						X			
QV04-7R						X			
QV05-25						X		807	
QV06-20						X		6146	
QV1-150A						X		LX150A	
QV10-P8						X			
QV20-P18						X		LPR60A	
QY2-100						X		813	
QY3-65						X		L-65A	
QY3-125						X		6155	
QY4-250						X		6156	
QY4-500A						X		LX500A	
QY5-500						X		6097	
QY5-3000A						X		6076	
QY5-3000W						X		6075	
QYS50-P40						X			
REN90L	X								
RENS137LD	X								
RFG-5	X								
RG1-210A						X			
RG3-250						X			

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens Halske)	STATE LABS (Ericsson-x) Thornosen *) (Brown, Boveri, #)	AMERICAN TYPE
RG3-250A						X			866n
RG3-1250						X			
RG4-1000						X			
RG4-1250						X			
RG4-3000						X			6693
RG62D	X								
RG105	X								
RGN354	X								
RR3-250						X			3B28
RR3-1250						X			4B32
RR3-1250A						X			
RR3-1250B						X			
RV12P2000	X								
RY12-100						X			8020
SP2						X			
SPL						X			
SPLB						X			
SP6									6AM6
SP13						X			
SP13C						X			
STV70/6	X								
STV75/15	X								
STV85/10	X								OG3
STV100/25ZII	X								
STV100/60ZII	X								
STV108/30	X								OB2
STV150/15	X								
STV150/20	X								
STV150/30	X								OA2
STV150/60	X								
STV150/60A	X								
STV500/0-1	X								
T50-1								#	T-10
T100-1								#	HF150
T110-1								#	845
T111	X								
T115	X								
T130-1								#	
T150-1								#	
T300-1								#	
T350-1								#	5867
TAL0	X								
TD03-5						X			
TD03-10						X			
TD03-10F						X			
TD04-20						X			
TD05-12						X			2C46
TD1-100A						X			2C39A
TD2-300A						X			7004
TD3-12						X			2C12
TD3-5-12						X			2C43
TD4-5-10						X			
TDD2A						X			
TDDL						X			
TDDL3C						X			
TH1B						X			
TH21C						X			

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Teletunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thomson-Y) (Brown-Boveri-Z)	AMERICAN TYPE
TH30C						X			
TK6	X								
TK7	X								
TK8	X								
TL4	X								
TL6	X								
TQ1/2							#	3023	
TQ2							#	5557/FG17	
TQ2/3							#	PL6755	
TQ2/6							#	6858	
TQ2/12							#		
TQ2/25							#		
TQ4							#	873	
TQ5							#		
TQ6							#		
TQ7							#		
TQ8							#		
TT1A						X			
TX2/3							#	5544	
TX2/6							#	5545	
TX10-4000						X			
TX12-12W						X			
TY2-125						X		5866	
TY3-250						X		5867	
TY4-350						X		833A	
TY4-500						X		5868	
TY4-500B						X			
TY5-500						X			
TY6-800						X		7092	
TY6-5000A						X		5924	
TY6-5000W						X		5923	
TY7-6000A						X		6961	
TY7-6000W						X		6960	
TY12-25A						X		6618	
TY12-25W						X		6617	
TY12-50A						X		6078	
TY12-50W						X		6077	
TYS2-250						X			
TY54-500						X			
TYS5-1000						X			
TYS5-2000						X			
TYS5-3000						X			
U30			X			X			
UAA11	X								
UAA91	X								
UABC80	X		X			X		28AK8	
UAF11						X			
UAF42	X		X			X		1257	
UB41			X			X			
UBC11	X		X			X		1157	
UBC81			X			X			
UBF11	D								
UBF15	X								
UBF80	X		X			X		1708; 17N8	
UBF89	X		X			X			
UBL1			X			X			
UBL21			X			X			

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-x) (Thornosen-y) (Brown-Boveri-z)	AMERICAN TYPE
UC92									
UC84	X		X			X		9A94	
UC85	X		X			X			
UCF12	X					X		26A98	
UCF80									
UCH1			X			X			
UCH11	D		X						
UCH21									
UCH41			X			X			
UCH42			X						
UCH81	X		X			X		14K7	
UCL11	X		X			X		19D8; MAJ8	
UCL81	X								
UCL82	X	X	X			X	X	50BMB	
UCL83						X			
UF9						X			
UF11			X			X			
UF14	X								
UF15	X								
UF21									
UF41			X			X			
UF42	X		X			X		12AC5	
UF43			X			X			
UF80			X			X			
UF85	X		X			X			
UF86	X		X			X			
UF89		X				X			
UL11	X		X			X		12DA6	
UL41	X								
ULL4			X			X		45A5	
ULL6						X			
UL84						X			
UML	X	X	X			X		45B5	
UM11	X		X			X			
UM34									
UM35	X					X			
UM80									
UM81	X		X			X		19BR5	
UR1C						X			
UR3C						X			
UY1N						X			
UY11	X		X						
UY21									
UY41						X			
UY42	X		X			X		31A3	
UY82			X					55N3	
UY85			X						
UY92	X		X		X			38A3	
VF14			X						
VP2	X								
VP2B						X			
VPL						X			
VPLA						X			
VPLB						X			
VPL3A						X			
VPL3C						X			

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens Halske)	STATE LABS (Ericsson-x) Thermosen *) (Brown Boveri #)	AMERICAN TYPE
XG95						X			
XG1-2500						X		5559	
XG2-12						X			
XG2-25						X			
XG2-500						X			
XG2-6100						X			
XG5-10						X		6786	
XG5-500						X		5557	
XG15-10						X		6786	
XG15-12						X			
XG16-200						X		5022	
XG2-6100						X		MT105	
XH-015						X		3015	
XH3-015						X		3015	
XH8-100						X		LC35; 6268	
XH16-200						X		6279; 5022	
XH25-500						X		5949	
XRL-12						X		5855	
XRL-1600						X		5796	
XRL-3200						X		5514	
XRL-6100						X		5515	
XRL-6100A						X		6807	
Z300T						X		1267; OA4G	
Z302C						X			
Z303C						X			
Z500E						X			
Z502S						X			
Z700U						X			
Z729					X			EF86	
Z800U						X		6538	
Z801U						X		6539	
Z803U						X		6779	
Z804U						X			
Z900T						X		5823	
105G						X		105G	
1U5	X					X		1U5	
2A015							*		
2A515A							*		
2A515JAN							*		
2051/396A							X		
2051L							X		
2D1A						X			
2D21W						X		2D21W	
2E26						X		2626	
2J56						X		2J56	
2-OA79						X			
2-0072						X			
2SM75							*		
4-125A						X		4-125A	
4-250A						X		4-250A	
4-100A						X		4-100A-500A	
4035						X		6268	
4M713						X			
4M213						X			
LX150D						X		LX150D	
LX150G						X		LX150G	

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mutlard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson: x) (Theromson: *) (Brown Boveri: #)	AMERICAN TYPE
5ABP1						X			5ABP1
5ADP1						X			DG13-34
5Q22									6279
5DC5								*	
5DC5M								*	
5FP14						X			5FP14
5MD5								*	
5ULG									5ULG
5YLG						X			5YLG
5Y3G						X			5Y3G
5Y3GT						X			5Y3GT
5ZLG						X			5ZLG
6A7						X			6A7
6ABG						X			6ABG
6AGT						X			6ABGT
6AL5	X					X			6AL5
6AQ5L								X	
6AS6						X			6AS6
6BQ7A						X			6BQ7A
6C5G						X			6C5G
6C5GT						X			6C5GT
6CB6	X					X			6CB6
6F6G						X			6F6G
6J56									6J5G
6J5GT									6J5GT
6J6L								X	6927
6K7G						X			6K7G
6K7GT						X			6K7GT
6K8G						X			6K8G
6K8GT						X			6K8GT
6L6G						X			6L6G
6L6GA						X			6L6GA
6N7G						X			6N7G
6P7G						X			6P7G
6Q7GT						X			6Q7GT
6SA7GT						X			6SA7GT
6SJ7GT						X			6SJ7GT
6SK7GT						X			6SK7GT
6SN7GT						X			6SN7GT
6SQ7GT						X			6SQ7GT
6U8						X			6U8
6V6G						X			6V6G
6V6GT						X			6V6GT
6X5G						X			6X5G
12J5GT						X			12J5GT
12J7GT						X			12J7GT
8DC15								*	
8DS15								*	
16KB6								*	
18AK5								X	
18AQ5								X	
18C51								X	
18J6								X	
20CG						X			
20CV						X			
25Z1G						X			25Z1G

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson-X) (Thermosen-*) (Brown Boveri-#)	AMERICAN TYPE
2526GT						X		2526GT	
300G						X			
35L6GT						X		35L6GT	
35Z4GT						X		35Z4GT	
50AVP						X			
50L6GT						X		50L6GT	
51AVP						X			
52AVP						X			
52CG									
53CG						X			
53CV						X			
51AVP						X			
55CG						X		927	
57CV						X			
58CG						X			
58CV						X			
61RV						X			
61SV						X			
63TV						X			
75B1						X			
75C1						X			
80						X		80	
83A1						X			
85A1						X		0E3	
85A2	X					X		0G3	
85A3						X		5783	
90AG						X			
90AV						X			
90C1						X			
90CG						X			
90CV						X			
91AG						X			
91CV						X			
95A1						X			
108C1						X		0B2	
150B2						X		635L	
150B3						X			
150C2						X		0A2	
150C3						X		0D3	
150CA						X		0A2	
35LV						X			
396A							X		
401A							X		
403B							X		
401A							X		
407A							X	407A	
408A							X	408A	
409A							X		
416B							X	416B	
417A							X		
436A							X		
416A							X		
723A/B	X								
872A						X		872A	
1561			X						
1805			X						

No matter what product or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

EUROPEAN TYPE	AMERICAN ELITE (Telefunken)	AMPEREX	AMPEREX (Valvo)	BRITISH INDUSTRIES (Genalex)	FISHER	INT'L ELECTRONICS (Mullard)	SONOTONE (Siemens-Halske)	STATE LABS (Ericsson X) Theromosen*, (Brown Boveri #)	AMERICAN TYPE
4614			X						
4636			X						
4654			X						
4659			X						
4682			X						
4683			X						
4687			X			X			
4687A						X			
4688			X						
4689			X						
4694			X						
4699			X						
5590/402A							X		
5591/403B							X		
5636						X		5636	
5644						X		5644	
5651						X		5651	
5654	X								
5670							X	5670	
5672	X								
5676	X								
5678	X								
5696	X								
5718						X		5718	
5820						X			
5823	X								
5823A	X								
5840						X		5840	
5842/417A							X		
5845							*		
5847/404A							X		
5847(JAN)							X		
5899						X		5899	
5902						X		5902	
5965	X								
6005	X								
6021						X		6021	
6028/408A							X	6028/408A	
6080						X		6080	
6205						X		6205	
6211	X					X			
6216							X	6216	
6397	X								
6397S	X								
6463	X					X			
6760							X		
6761							X		
6927/636L							X		
6928/6AG5L							X		
7025						X			
7150							X	7150	
7189						X		7189	
7189MP				X					
7475						X			
13201A						X			
13201AA						X			

No matter what product or component you require...
YOU'LL FIND IT FASTER IN THE '60 MASTER.

YOU'LL FIND IT FASTER IN THE 1960 MASTER

Tubes, Receiving, Television,
Transmitting, Special Pur-
pose - Diodes, Transistors -
Dial & Panel Lamps

Audio Equipment - P.A. -
Tuners - Amplifiers - High
Fidelity Units, Radio & TV
Receiver Chassis, Kits, In-
tercom Systems

Speakers, Projectors, Horns,
Trumpets

Microphones - Microphone
Stands - Pickups - Car-
tridges - Headphones

Recording Equipment - Re-
corders - Transcription Units
- Pickups - Cartridges -
Phono Motors - Turntables
- Record Changers - Discs -
Needles - Tape

Cable & Microphone Con-
nectors, Fittings - Plugs - Sock-
ets - Receptacles - Termi-
nals, Terminal Strips

Test Equipment - Testing,
Measuring, Indicating In-
struments, Analyzers,
Panel Meters

Pilot and Dial Lights - Assem-
blies - Instrument Fuses

Rectifiers, Dry disc, Selenium,
Instrument - Germanium &
Selenium Diodes

Amateur Equipment - Com-
munication Receivers -
Transmitters - Variable
Capacitors - Coils - Insula-
tors - Metal Racks, Cabi-
nets, Panels, etc.

Books - Manuals - Radio &
TV Data Services

Switches - Relays - Jacks -
Plugs - Photo Electric Units

Power Equipment - Batteries
- Battery Eliminators &
Chargers - Generators, In-
verters, Vibrators, Packs -
Voltage Transformers &
Controls

Transformers - Reactors -
Chokes - Coils - Inductors

Capacitors - Noise & Interfer-
ence Filters - Capacitor
Testers - Printed Circuits

Resistors - Volume Controls -
Ballasts - Decades, Bridges
- Noise Filters & Suppres-
sors - Rheostats, Potentio-
meters, Attenuators


Wire and Cable

Antennas - Antenna Systems
- Installation Accessories

TV Accessories - Boosters,
Converters, Tuners - Cabi-
nets

Crystals, Amateur, Commer-
cial, Special

Tools - Soldering Irons, Pliers,
Wrenches, Screwdrivers,
Punches, Cutting Tools,
Neutralizing & Alignment
Tools - Connectors - Chemi-
cals, Oils, Paints, etc.,
Hardware, Service Aids



No matter what product
or component you require...

YOU'LL FIND IT FASTER IN THE '60 MASTER.

\$3.50

At parts
distributors

\$4.50 in Canada

RDC-559

Distributed by:

BUD ELECTRONIC SUPPLY CO.
114 E. NORTH ST.
DANVILLE, ILLINOIS