


GAMMES COUVERTES ET POINTS D'ALIGNEMENT

Plan du Caire 1939. Condensateur variable. $\left\{ \begin{array}{l} 2 \times 460 \text{ pf (320)} \\ 2 \times 490 \text{ pf (321)} \end{array} \right.$

Gammes couvertes	Point trimmer		Point self		Point Padding	
	Kc	M	Kc	M	Kc	M
G.O. $\left\{ \begin{array}{l} 309,7 - 150,4 \text{ Kc} \\ 969 - 4995 \text{ m} \end{array} \right.$	264	-	205	-	160	-
	-	1135	-	1452	-	1875
P.O. $\left\{ \begin{array}{l} 1604 - 549 \text{ Kc} \\ 187 - 578 \text{ m} \end{array} \right.$	1400	-	904	-	574	-
	-	214	-	332	-	522
O.C. $\left\{ \begin{array}{l} 18 - 5,9 \text{ Mc/s} \\ 16,65 - 50,9 \text{ m} \end{array} \right.$	18	-	-	-	6,5	-
	-	18,75	-	-	-	46,20

Branchement M.F. 7 et 8

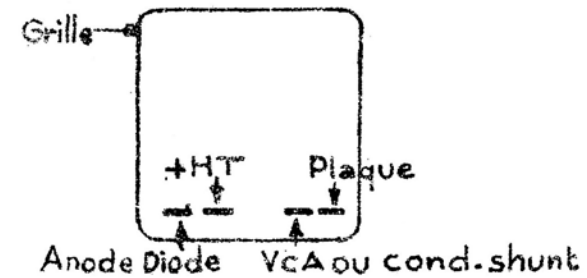

Les ateliers ARIEX 6 ^{bis} Rue du Progrès. Montreuil	5.179
Branche^{nt} du bloc 320	DESSINE PAR: 3.2.49 VERIFIE PAR: