


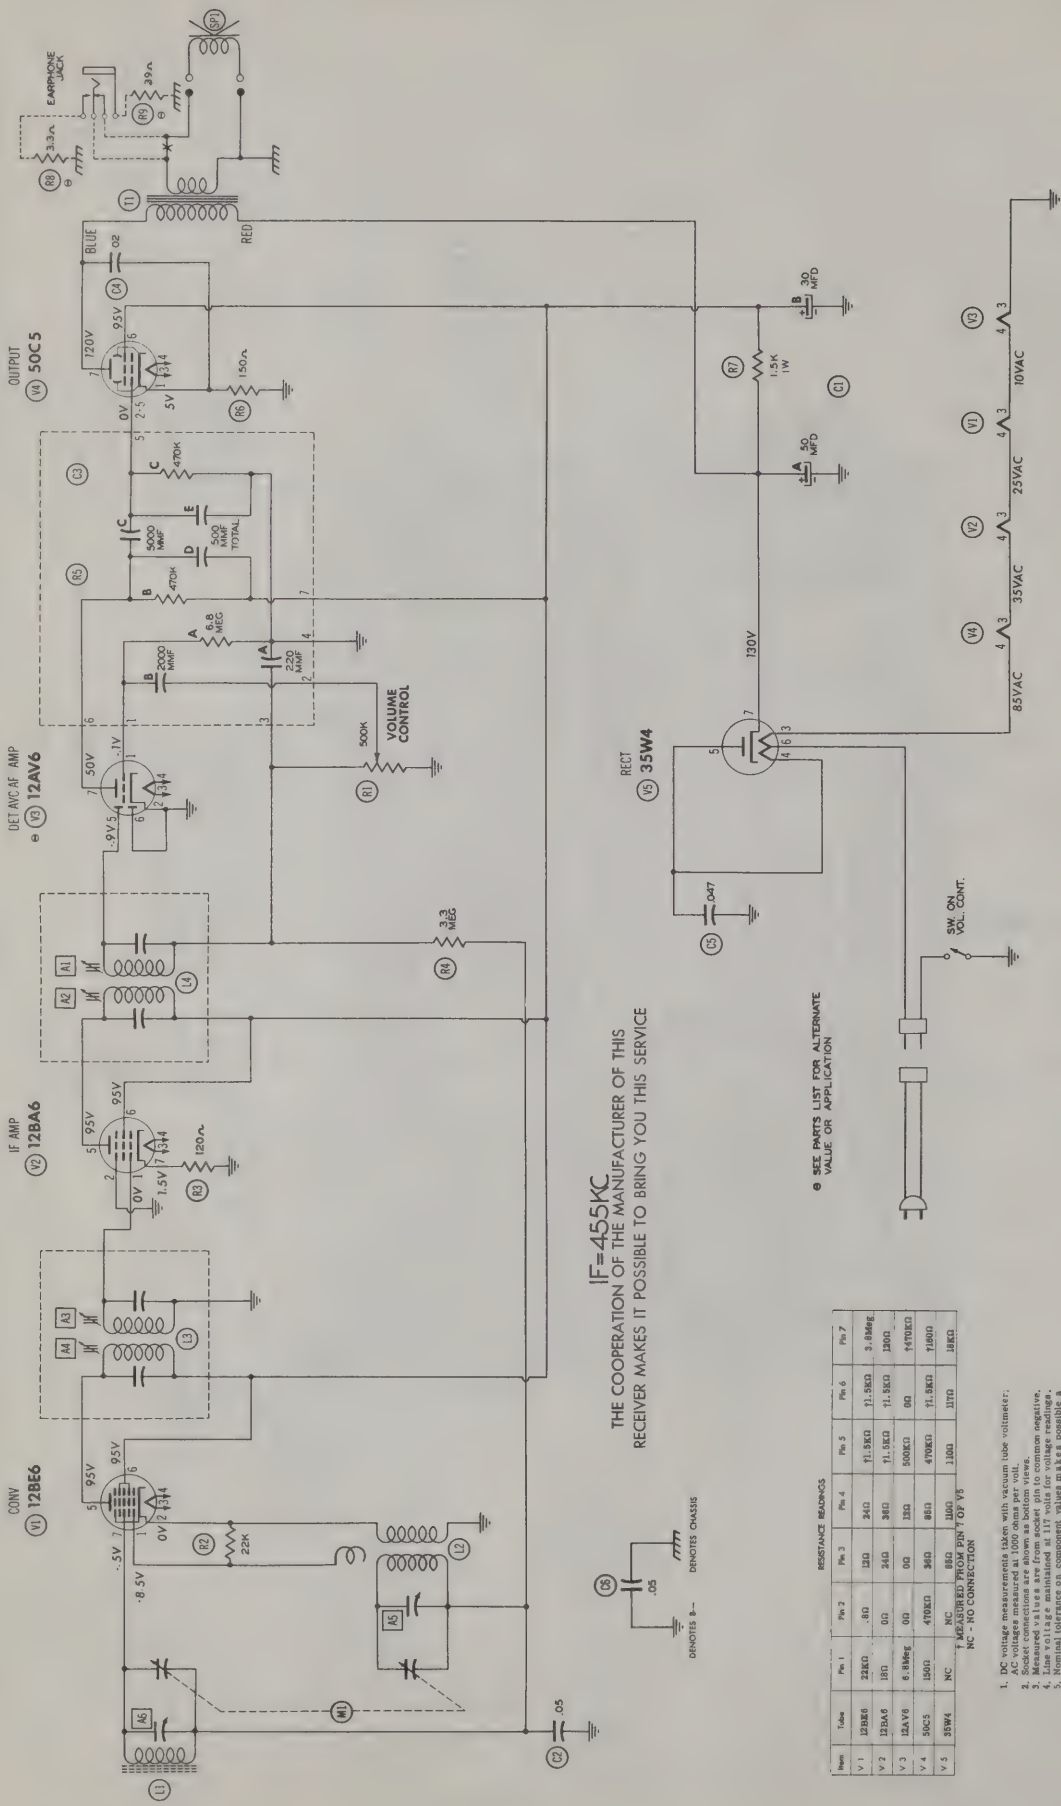

IF=455KC
THE COOPERATION OF THE MANUFACTURER OF THIS
RECEIVER MAKES IT POSSIBLE TO BRING YOU THIS SERVICE

SEE PARTS LIST FOR ALTERNATE
VALUE OR APPLICATION

Pin	Table	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7
V 1	12BE6	22KΩ	8Ω	120	240	11.5KΩ	11.5KΩ	3.9MΩ
V 2	12BA6	100	0Ω	240	240	11.5KΩ	11.5KΩ	100
V 3	12AV6	6.8MΩ	0Ω	0Ω	120	500KΩ	0Ω	1470KΩ
V 4	50C5	1500	470KΩ	360	850	470KΩ	11.5KΩ	1500
V 5	35W4	NC	NC	850	100	100	110	10KΩ

1. DC voltage measurements taken with vacuum tube voltmeter.
2. AC voltages measured at 1000 ohms per volt.
3. Measured values are from socket pin to common negative.
4. Measured values are from socket pin to common negative.
5. Measured values are from socket pin to common negative.
6. Variation of $\pm 1\%$ in voltage and resistance readings.
7. Volume control at maximum, no signal applied for voltage measurements.

NC - NO CONNECTION
T - MEASURED FROM PIN 7 OF V5