


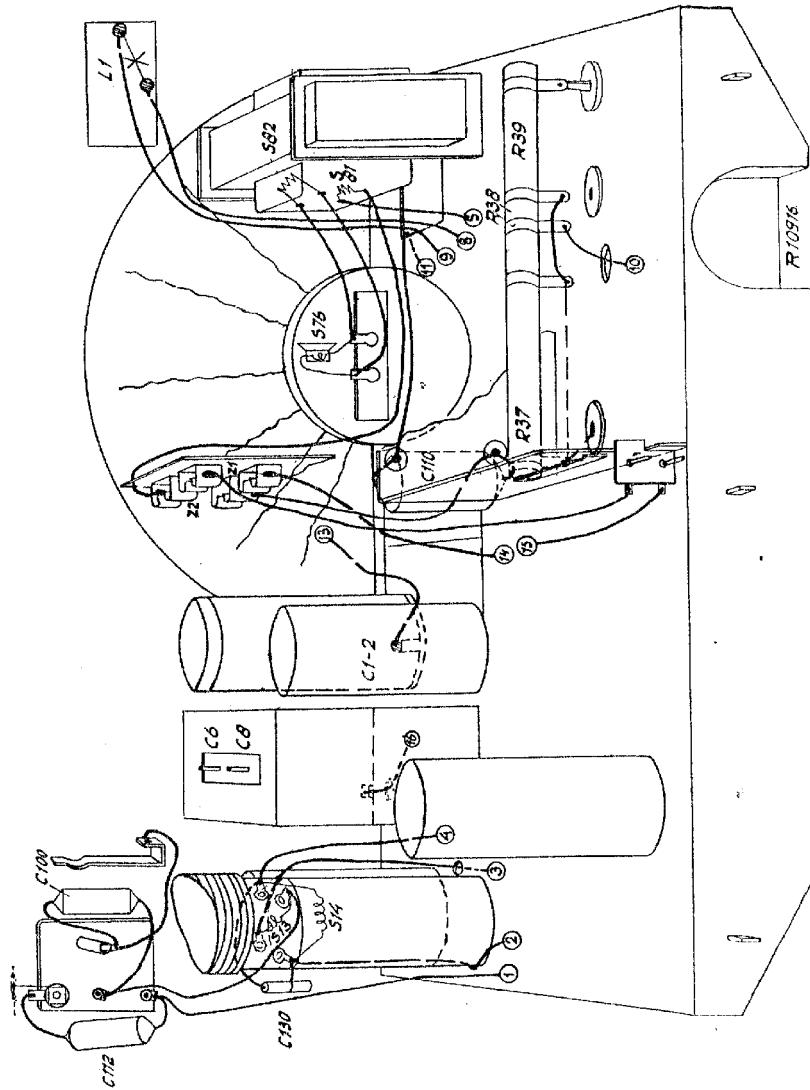

6. 21. 11.

PHILIPS SERVICE

BX 272 U-00-20


16,5— 51 m (18,2— 5,88 Mc/s)
200 — 565 m (1500 — 530 kc/s)
750 — 1910 m (400 — 157 kc/s)

9712—06 Z = 5 Ω
9730 Z = 5 Ω

110, 200 V, R37: 125, 220 V
125, 220 R37: 110, 200V


452 kc/s

40 W

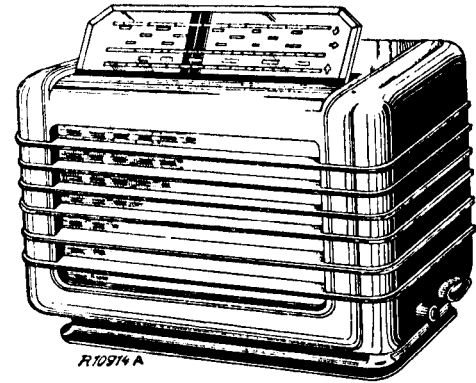

16,5—51 m III	200—565 m III	200—565 m V
VOL. min —25 pF—AB2 C8 15,2 Mc/s— C6, C8 15,2 Mc/s	VOL. max C6, C8 +15° 1420 kc/s— C38 max C18 max	1153 kc/s— C6, C8 1153 kc/s 260 m
VOL. max C8 C6, C8 15,2 Mc/s C34 max	VOL. min —25pF—AB2 C8 160 kc/s— C6, C8 160 kc/s	750—1910 m V 1875 m 160 kc/s— C50 max
	VOL. max C8 C50 max	

15° A9 600 18.0

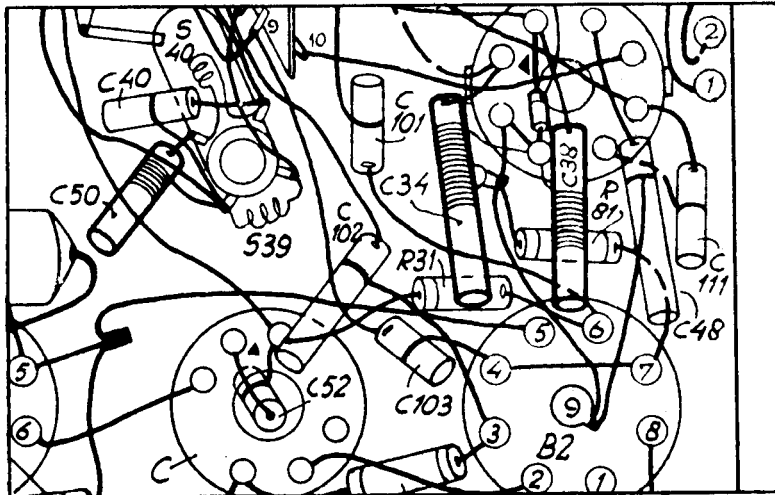

R 107 88 A

1947

R1 1200 Ω	48 494 10/1K2	C1 50+50 μ F	48 317 08/50
R11 0,5 M Ω	49 500 11.0	C2 11-400 pF	+50
R12 47 k Ω	48 555 10/47K	C6 3,5-50 pF	A9 863 99.0
R30 49 379 62.0	49 379 62.0	C8 39 pF	49 005 50.2
R31 0,82 M Ω	48 555 10/820K	C19 22 pF	48 203 10/39E
R32 10 k Ω	48 556 10/10K	C20 12,5 pF	48 201 05/22E
R33 68 k Ω	48 426 10/68K	C34 7,5-100 pF	49 005 48.2
R34 1 M Ω	48 556 10/1M	C38 8,2 pF	49 005 51.2
R35 6,8 M Ω	48 427 10/6M8	C38a 49 pF	48 201 20/8E2
R36 0,68 M Ω	48 555 10/680K	C40 421 pF	48 203 02/49E
R37 75 Ω		C48 20-275 pF	48 203 01/421E
R38 150 Ω	49 362 99.1	C50 100 μ F	49 005 53.2
R39 190 Ω		C51 6800 pF	
R40 10 k Ω	48 427 10/10K	C52 4700 pF	
R41 18 k Ω	48 555 10/18K	C61 1000 pF	
R43 6,8 M Ω	48 427 10/6M8	C62 120 pF	
R75 220+270 Ω	48 427 10/220E	C75 470 pF	
	48 557 10/270E	C83 47000 pF	
R81 47 k Ω	48 555 10/47K	C85 1000 pF	
		C100 120 pF	
		C101 470 pF	
		C102 82 pF	
		C103 47000 pF	
		C104 47000 pF	
		C105 100 pF	
		C107 68 pF	
		C108 150 pF	
		C109 22000 pF	
		C110 56 pF	
		C111 1000 pF	
		C112 22000 pF	
		C113 12 pF	
		C130 12 pF	
Z1 300 mA	08 100 96.2		

	B2	B3	B5	
	UCH 21	UCH 21	UBL 21	
Va	H = 135 T = 95	H = 135 T = 30	150	V
Vg2(+4)	H = 70 T = —	H = 70 T = —	135	V
Ia	H = 1,5 T = 3,5	H = 4,5 T = 1,6	42	mA
Ig2(+4)	H = 4,5 T = —	H = 3 T = —	7,5	mA

VC1 = 165 V, VC2 = 135 V, VC75 = 82 V

S17, S18, S19, S20 S13, S14, S33, } S34, S37, S38, } S100 S39, S40 S51, S52, S53, } S54, C51, C52 }	A3 120 18.0 A3 120 17.3 A3 110 04.0 A3 121 03.3	S61, S62, S63, } S64, C61, C62 } S76 S81, S82	A3 123 23.1 49 981 13.1 A1 081 82.0
L1	8095D-99		

93 953 29.1

BX 272 U-00-20

