



13,5 - 20 m.
17 - 26 m.
21 - 32 m.
32 - 50,5 m.
160 - 550 m.

F 3028/05 - 5 Ω
110 V. 125 V. 145 V.
200 V. 220 V. 245 V.

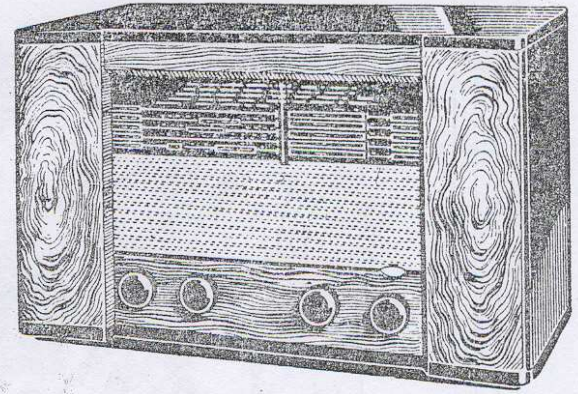

160 - 550 m. A	160 - 550 m. B	160 - 550 m. C
452 Kc/s - 32000 pF - g1.V1	1715 Kc/s - Y	452 Kc/s - Y
C4, C5 mín.	C4, C5 1715 Kc/s	C4, C5 mín.
S43, S44, S41, S42, S31, S32, S33, S34 máx.	C19, C10 máx.	C9 mín.
	600 Kc/s - Y	
	C4, C5 600 Kc/s	
	C20 máx.	
	13,5 - 20 m.	
	15,3 Mc/s - Y	
	S20 máx.	
	17 - 26 m.	
	11,85 Mc/s - Y	
	C27, C7, S22, S8 máx.	
	21 - 32 m.	
	9,67 Mc/s - Y	
	S24, S10 máx.	
	32 - 50,5 m.	
	6,17 Mc/s - Y	
	S26, S12 máx.	

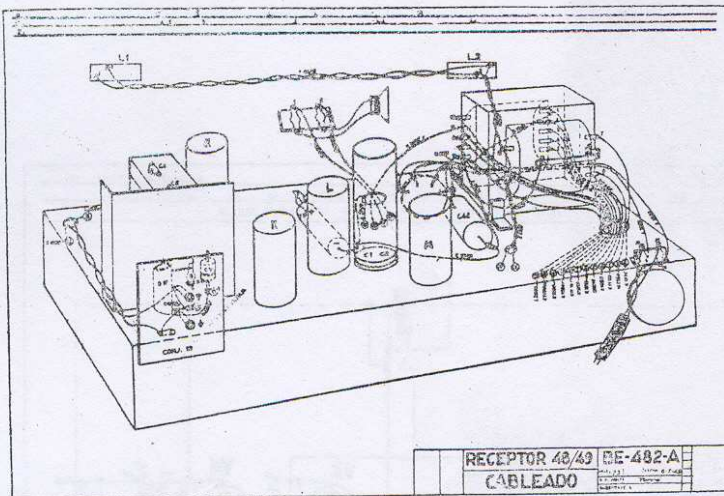


C1	40 pF	F 10350/40+40	R1	1200 Ω	48 468 10/1K2
C2	40 pF		R2	0,82 M Ω	48 425 10/820K
C3	100 pF	F 11012/100	R3	22000 Ω	48 425 10/22K
C4	12-492 pF	A3 345 00	R4	33000 Ω	48 427 10/33K
C5	12-492 pF		R5	68 Ω	48 426 05/68E
C7	30 pF	28 212 36	R6	33 Ω	48 425 10/33E
C9	30 pF	28 212 36	R7	28000 Ω	48 427 10/56K
C10	30 pF	28 212 36		2x56000 Ω	
C12	220 pF	48 406 20/220E	R8	0,1 M Ω	48 427 10/100K
C13	47000 pF	48 750 20/47K	R9	0,47 M Ω	48 425 10/470K
C14	0,1 pF	48 751 20/100K	R10	18000 Ω	48 425 10/18K
C15	115 pF	48 406 01/115E	R11	47000 Ω	48 425 10/47K
C16	470 pF	48 601 20/470E	R13	22000 Ω	48 425 10/22K
C17	56 pF	48 600 10/56E	R14	0,65 M Ω	49 500 33
C18	115 pF	48 429 99/115E	R15	2 M Ω	
C19	30 pF	28 212 36	R16	0,22 M Ω	48 425 10/220K
C20	350-575 pF	49 005 55	R17	0,2 M Ω	49 475 14
C23		1.ª Bob. F.I.	R18	2 M Ω	
C24			R19	0,82 M Ω	48 425 10/820K
C25	4,7 pF	48 406 99/4E7	R20	0,39 M Ω	48 425 10/390K
C27	30 pF	28 212 36	R21	1,5 M Ω	48 426 10/1M5
C29		2.ª Bob. F.I.	R22	0,1 M Ω	48 425 10/100K
C30			R23	1,5 M Ω	48 426 10/1M5
C31	18 pF	48 406 10/18E	R24	0,1 M Ω	48 426 10/100K
C32	3300 pF	48 751 10/33K3	R25	0,56 M Ω	48 425 10/560K
C33	15000 pF	48 750 10/15K	R26	1000 Ω	48 425 10/1K
C34	3,9 pF	48 406 99/3B9	R28	0,68 M Ω	48 426 10/680K
C35	4700 pF	48 751 10/4K7	R29	0,15 M Ω	48 425 10/150K
C36	56000 pF	48 750 10/56K			
C37	330 pF	48 406 10/330E			
C38	47 pF	48 406 10/47E			
C39	0,1 pF	48 751 20/100K			
C40	10000 pF	48 751 20/10K			
C41	2200 pF	48 757 20/2K2			
C42	22000 pF	48 758 20/22K			
C44	10 pF	48 406 99/10E			
C48	47000 pF	48 751 20/47K			
C50	47000 pF	48 751 20/47K			

S1, S2, S3, S4	F 2559	S21	ZB A3 110 82
S5, S6	ZB A3 110 77	S22	ZB A3 599 56
S7	ZB A3 110 78	S23	ZB A3 110 83
S8	ZB A3 599 56	S24	ZB A3 599 56
S9	ZB A3 110 79	S25	ZB A3 110 84
S10	ZB A3 599 56	S26	ZB A3 599 56
S11	ZB A3 110 80	S27, S28	F 3252
S12	ZB A3 599 56	S31, S32, S33, S34, C23, C24	ZB A3 121 94
S13, S14	F 3251		
S17	ZB A3 110 60	S41, S42, S43, S44, C29, C30	ZB A3 121 94
S19	ZB A3 110 81	S45, S46, S47, S48, S49, S50, S55	F 2561
S20	ZB A3 599 56		

	V1		V2	V3	V4	
	ECH42		EAF42	EAF42	EL41	
	HEXODO	TRIODO				
V1	6,3		6,3	6,3	6,3	Volts.
Va	235	110	235	60	230	Volts.
Vg 2+4	75	—	81	32	235	Volts.
-Vg	2,4		2,4	1,9	5,8	Volts.
Ia	2	3,8	5,2	1,05	40	m.A.
Ig 2+4	2,8	—	1,5	0,3	5,2	m.A.

S. 17	5, 6, 1, 8, 9, 10, 11, 12, 13, 16, 1a, 1b, 1c, 1d, 2, 3, 4	20, 21, 22, 23, 24, 25, 26, 27, 28	31, 32, 33, 34	41, 42, 43, 44	46, 47, 48, 49, 50, 51
C. 9	10, 15, 4, 12, 13	42, 17, 7, 10, 18, 1, 2, 3, 14, 20, 27, 25, 19, 5	23	24	40, 48
R. 1	2	4, 1, 5, 6, 7, 33	23	24	17, 18, 22, 20, 19, 24, 23, 26, 19, 28

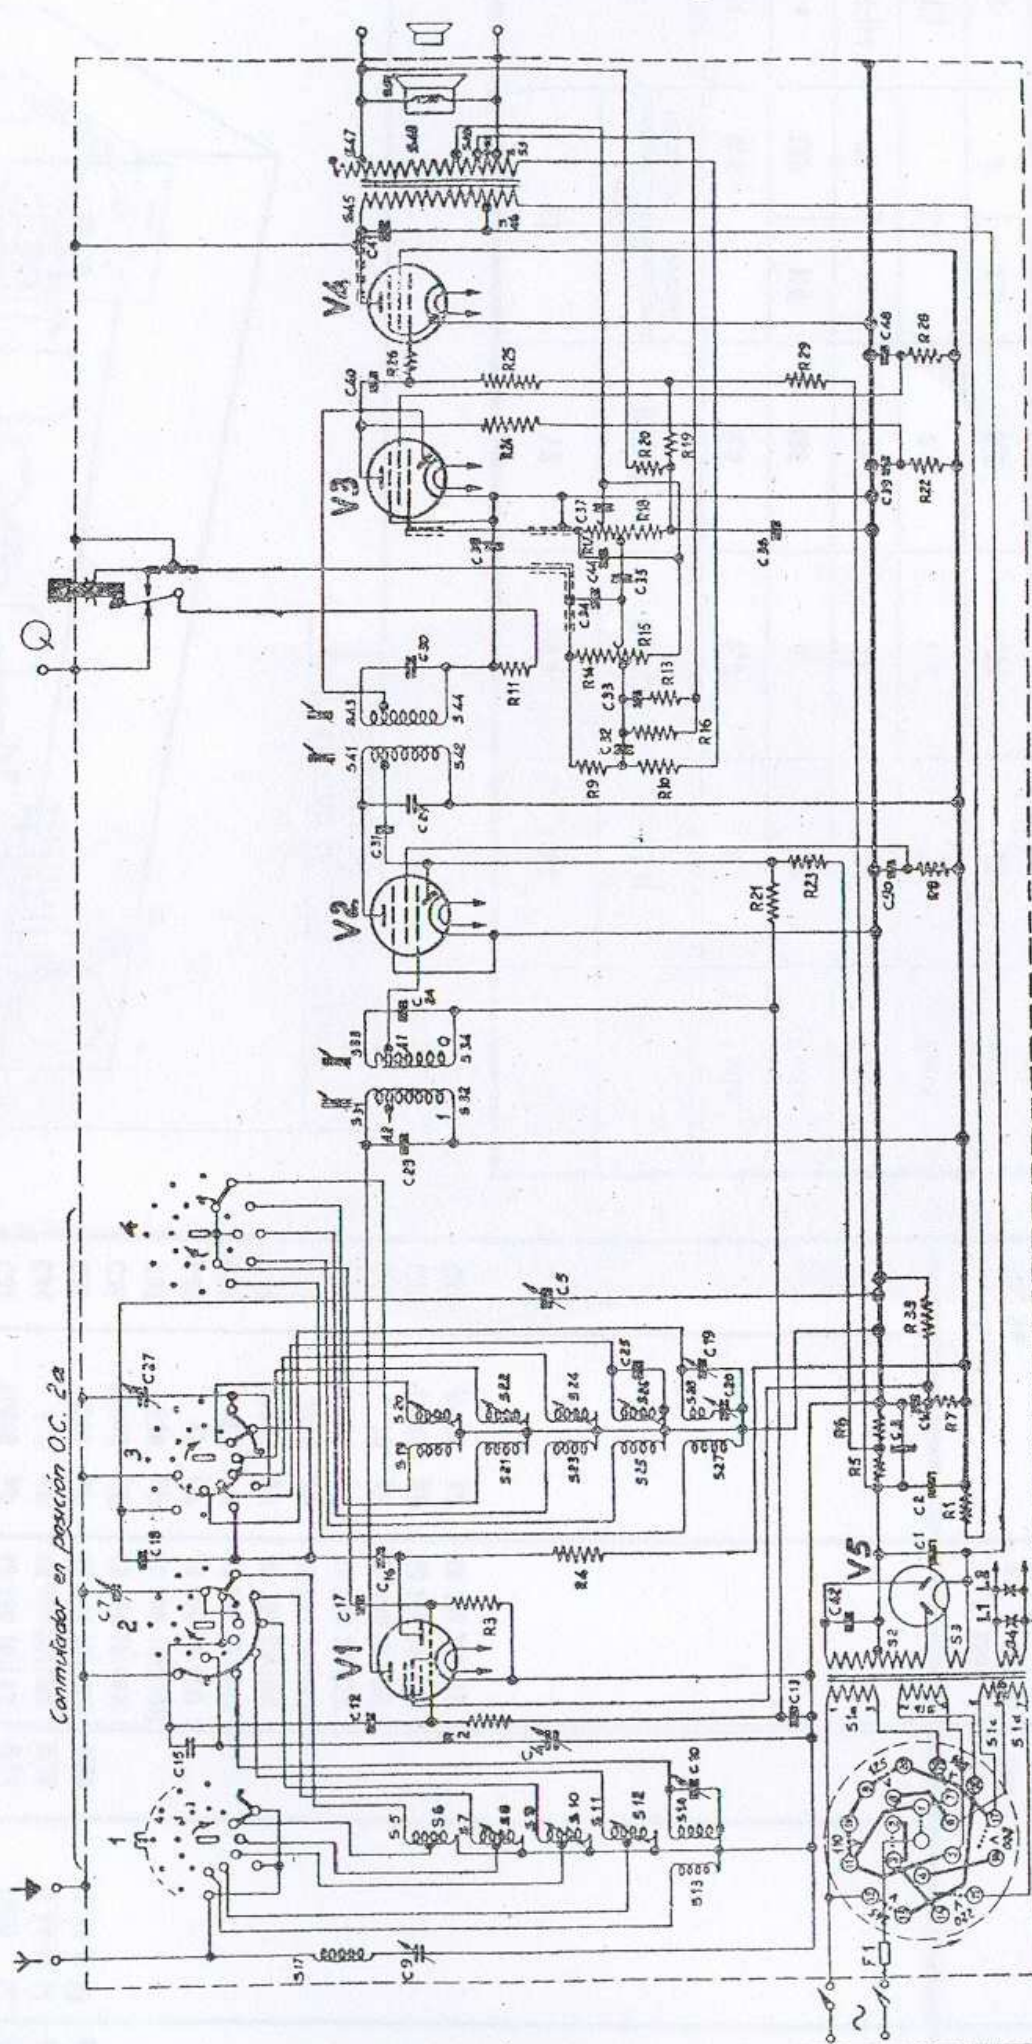

V1

V2, V3

V4

V5

RECEPTOR 48 49 BE-482-A

ESQUEMA

4-6-49

22-6-49

9-7-49