

TUNG-SOL

PENTODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

FOR


VOLTAGE AMPLIFIER

SERVICE IN T.V. APPLICATIONS

ANY MOUNTING POSITION



GLASS BULB
MINIATURE BUTTON
7 PIN BASE E7-1
OUTLINE DRAWING
JEDEC 5-2



BOTTOM VIEW
BASING DIAGRAM
JEDEC 7CC

THE 6AH6 IS A SHARP CUT-OFF VOLTAGE AMPLIFIER IN THE MINIATURE CONSTRUCTION. IT IS CHARACTERIZED BY A VERY HIGH TRANSCONDUCTANCE AND MODERATELY LOW INTERELECTRODE CAPACITANCES WHICH ADAPT IT TO WIDE BAND VIDEO AND INTERMEDIATE FREQUENCY AMPLIFIER SERVICE.

→ **DIRECT INTERELECTRODE CAPACITANCES**

EXTERNAL SHIELD #316 CONNECTED TO PIN 7

GRID TO PLATE: (G1 TO P)	0.020	pf
INPUT: G1 TO (H+K+G2+G3)	10	pf
OUTPUT: P TO (H+K+G2+G3)	3.6	pf

HEATER CHARACTERISTICS AND RATINGS

DESIGN CENTER VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3 VOLTS	450	MA.
-------------------------	-----------	-----	-----

MAXIMUM RATINGS

DESIGN CENTER VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE		300	VOLTS
GRID #2 VOLTAGE	SEE RATING CHART		
PLATE DISSIPATION		3.2	WATTS
GRID #2 DISSIPATION		0.4	WATTS
CATHODE CURRENT		13	MA.
GRID #2 SUPPLY VOLTAGE	→	300	VOLTS

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE

PRINTED IN U.S.A.

CONTINUED FROM PRECEDING PAGE


TYPICAL OPERATING CHARACTERISTICS



	PENTODE CONNECTED	TRIODE CONNECTED	
PLATE VOLTAGE	300	150	VOLTS
GRID #2 VOLTAGE	150	→ 150	VOLTS
GRID #3 VOLTAGE*	A	150	VOLTS
CATHODE RESISTOR	160	160	OHMS
PLATE RESISTANCE (APPROX.)	0.5	0.0036	MEGOHMS
TRANSCONDUCTANCE	9000	11000	μMHOS
TRANSCONDUCTANCE (GRID #3 TO PLATE)	B	---	
AMPLIFICATION FACTOR	---	40	
PLATE CURRENT	10	12.5	MA.
GRID #2 CURRENT	2.5	---	MA.
GRID #1 VOLTAGE (APPROX.) FOR $I_b = 10 \mu A$.	-7	-7	VOLTS

A
PIN #2 CONNECTED TO #7 AT SOCKET.

B
GRID #3 HAS PRACTICALLY NO CONTROL CHARACTERISTIC AND IT IS NOT INTENDED TO BE USED AS A CONTROL ELECTRODE. ITS TRANSCONDUCTANCE TO THE PLATE IS APPROXIMATELY 2 μMHOS AND THE μ IS 0.7 TO 1.0.

* INDICATES AN ADDITION.
→ INDICATES A CHANGE.

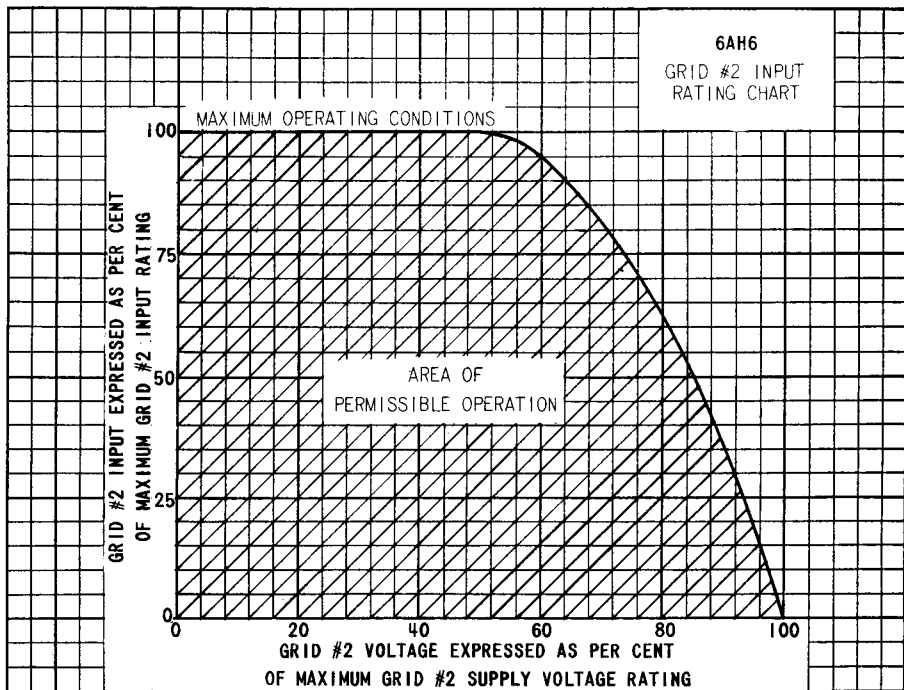

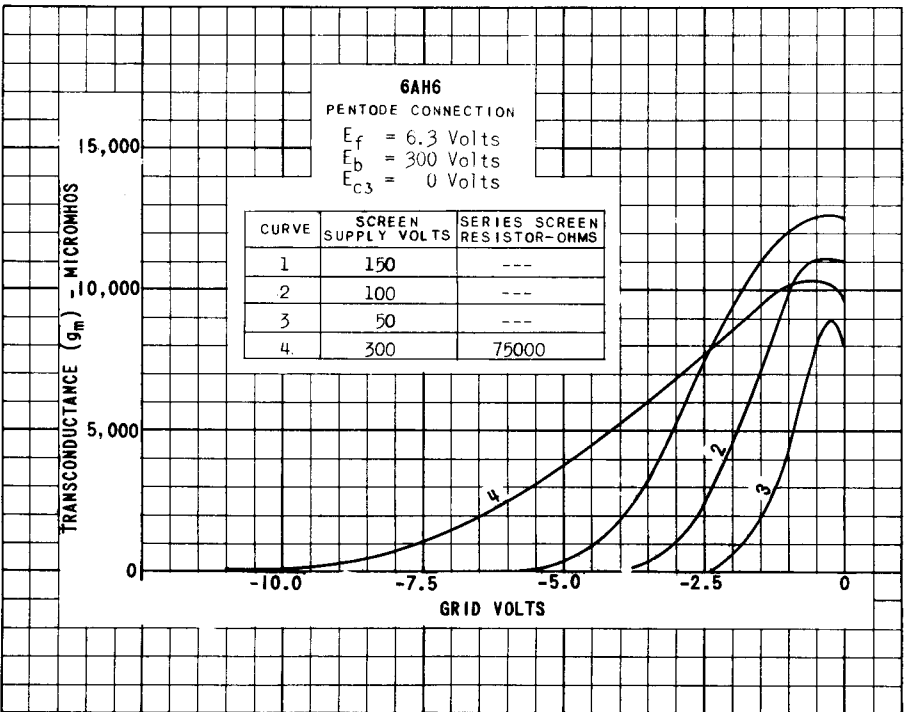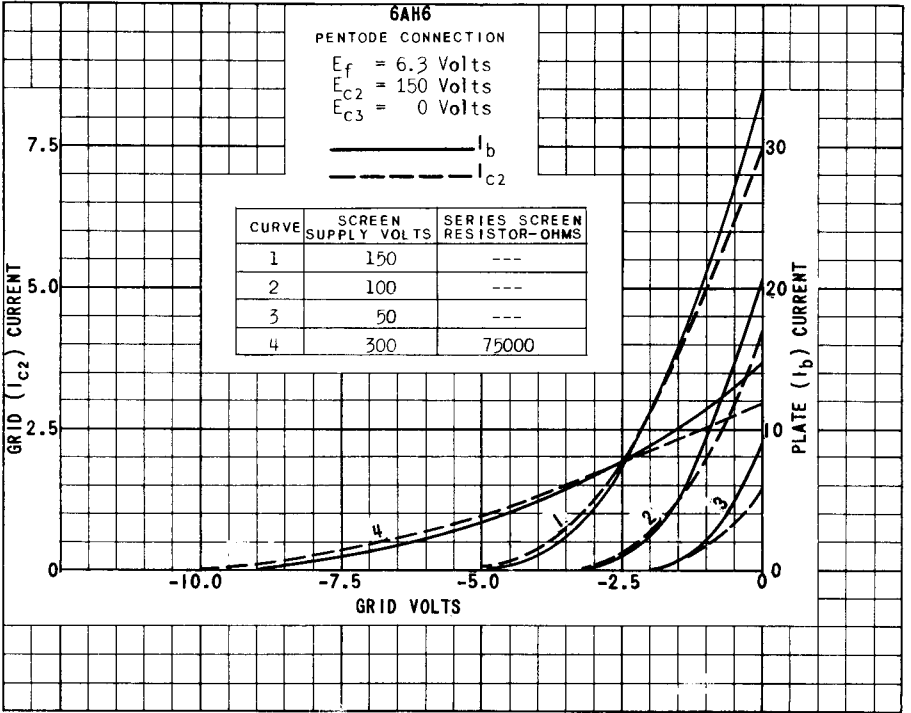

PRINTED IN U. S. A.

6AH6

