

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (approx.)	
Horizontal	65 Degrees
Diagonal	70 Degrees
Phosphor	P4
Fluorescence	White
Persistence	Medium
Faceplate	Gray Filter Glass
Light Transmittance (approx.)	72 Percent

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current (approx.)	0.6 Ampere
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes	5 μmf
Grid No. 1 to All Other Electrodes	6 μmf
External Conductive Coating to Anode ¹	1500 μmf Max. 750 μmf Min.
Ion Trap Magnet	External, Single Field Type

MECHANICAL DATA

Minimum Useful Screen Dimensions	10 $\frac{3}{4}$ x 14 $\frac{1}{4}$ Inches
Bulb Contact, (Recessed Small Cavity Cap)	J1-21
Base, (Small Shell Duodecal 6-Pin)	B6-63
Basing	12L

RATINGS

MAXIMUM RATINGS (Design Center Values)

Anode Voltage	16,000 Volts dc
Grid No. 4 (Focusing Electrode) Voltage	-500 to +1000 Volts dc
Grid No. 2 Voltage	500 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	125 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	2 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
During Warm-up Period not to Exceed 15 Seconds	410 Volts dc
After Equipment Warm-up Period	180 Volts dc
Heater Positive with Respect to Cathode	180 Volts dc

RECOMMENDED OPERATING CONDITIONS

Anode Voltage ²	14,000 Volts dc
Grid No. 4 Voltage	-56 to +310 Volts dc
Grid No. 2 Voltage	300 Volts dc
Grid No. 1 Voltage ³ Required for Cutoff	-33 to -77 Volts dc
Ion Trap Magnet Strength (approx.)	35 Gauss

CIRCUIT VALUES



Grid No. 1 Circuit Resistance	1.5 Megohms Max.
---	------------------

NOTES:

1. External conductive coating must be grounded.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than this value.
3. Visual extinction of undeflected focused spot.

QUICK REFERENCE DATA

Television Picture Tube
17" Direct Viewed
Rectangular Glass Type
Cylindrical Faceplate
Gray Filter Glass
Magnetic Deflection
Low Voltage Electrostatic Focus
Single Field Ion Trap
External Conductive Coating

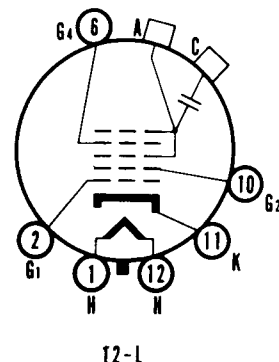

SYLVANIA ELECTRIC
PRODUCTS INC.

TELEVISION PICTURE TUBE
DIVISION
SENECA FALLS, NEW YORK

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

SEPTEMBER 1952

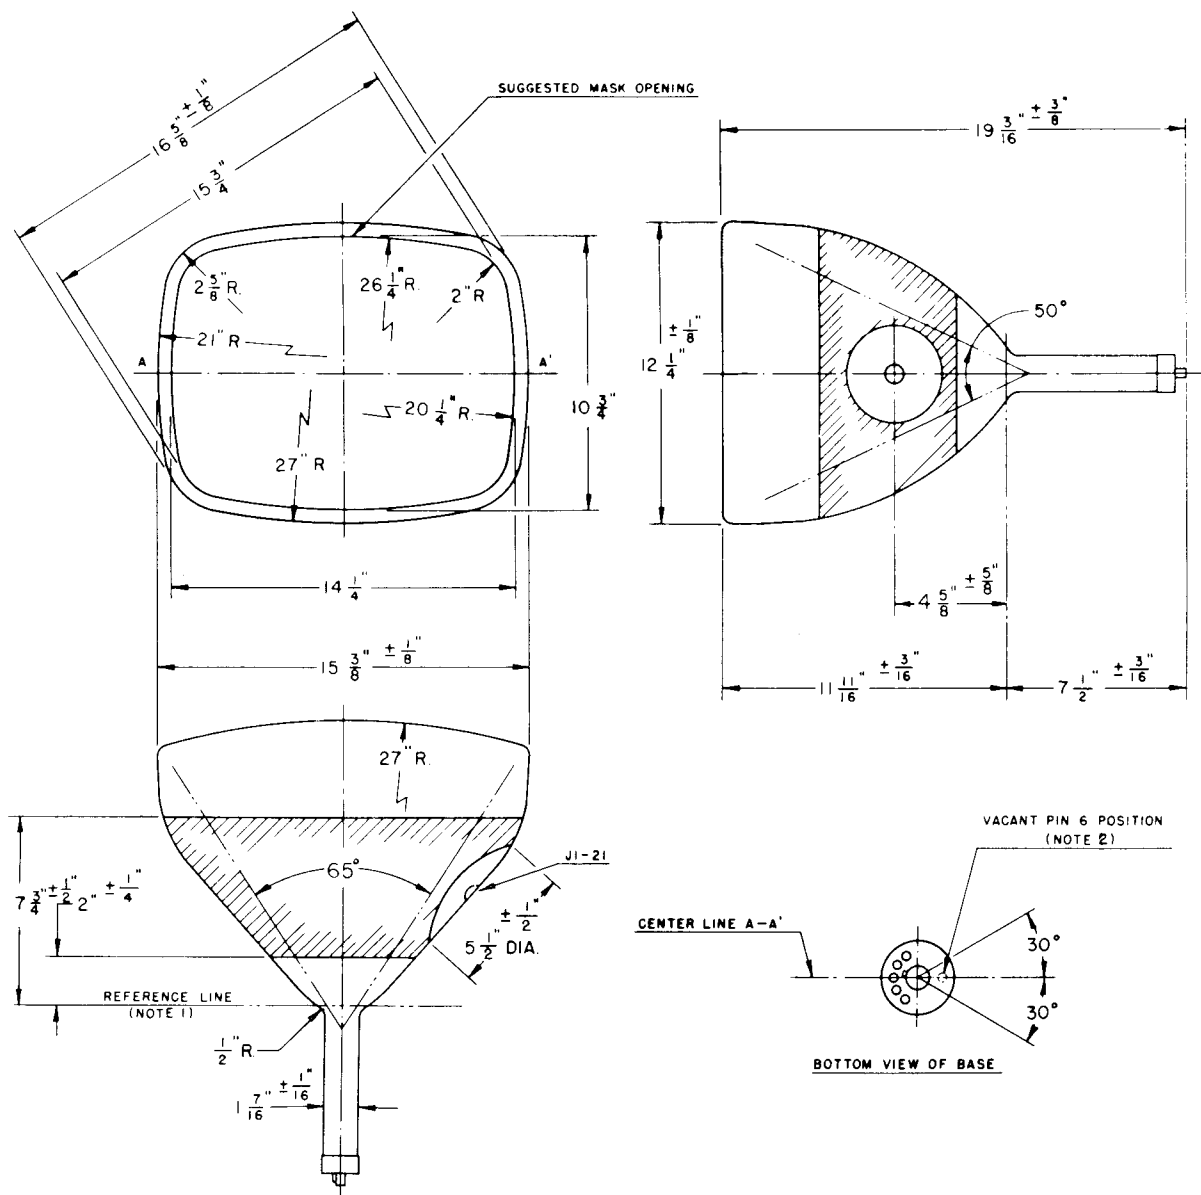


DIAGRAM NOTES:

1. Reference line is determined by the plane of the upper edge of the reference line gauge (RTMA No. 110) when the gauge is resting on the glass cone.
2. Anode aligns with pin position No. 6 ± 30 degrees.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.