

SS-E70

*AEP Model
UK Model*



SPEAKER SYSTEM

SPECIFICATIONS



Speaker System:	3-way speaker system
Speaker Unit:	Woofer 25 cm (10 inches), cone type Mid-range 8 cm (3 1/4 inches), cone type Tweeter 2 cm (3/4 inches), dome type
Enclosure Type:	Acoustic suspension Removable front grille
Nominal Impedance:	8 Ω
Power Handling Capacity:	Nominal 65 W DIN 45500 Maximum 100 W DIN 45500
Sensitivity:	91 dB (1 W, 1 m) 3.2 W (96 dB, 1 m) DIN 45500
Frequency Range:	35 Hz – 20,000 Hz
Crossover Frequency:	1 Hz, 7000 Hz
Volume:	33 liters
Dimensions:	Approx. 310 (w) x 610 (h) x 280 (d) mm 12 1/4 (w) x 24 (h) x 11 (d) inches
Weight:	Approx. 12 kg, 26 lb 7 oz (net, per speaker) Approx. 27 kg, 59 lb 8 oz (pair, in shipping carton)

SONY[®]
SERVICE MANUAL





154

1. DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.

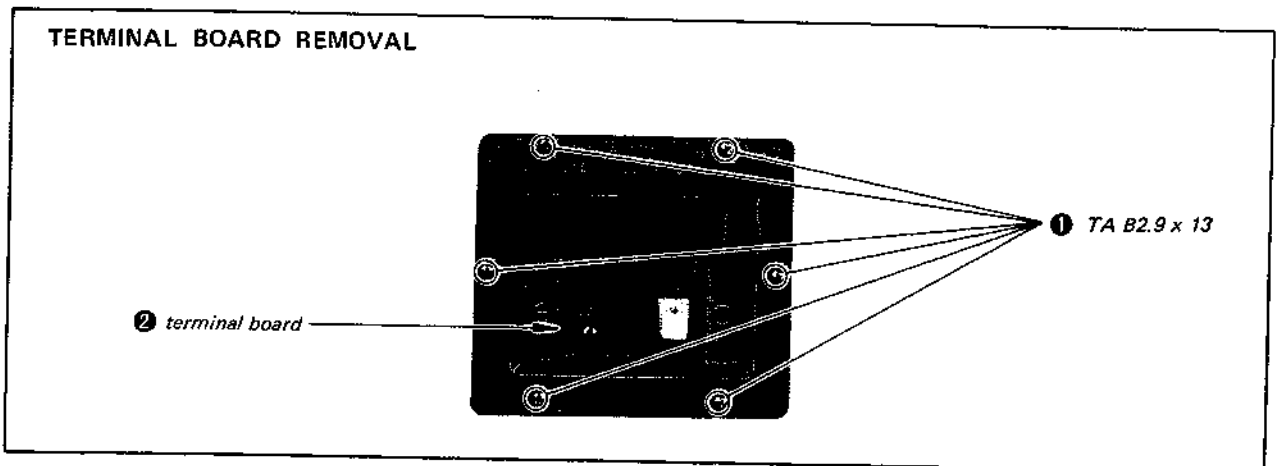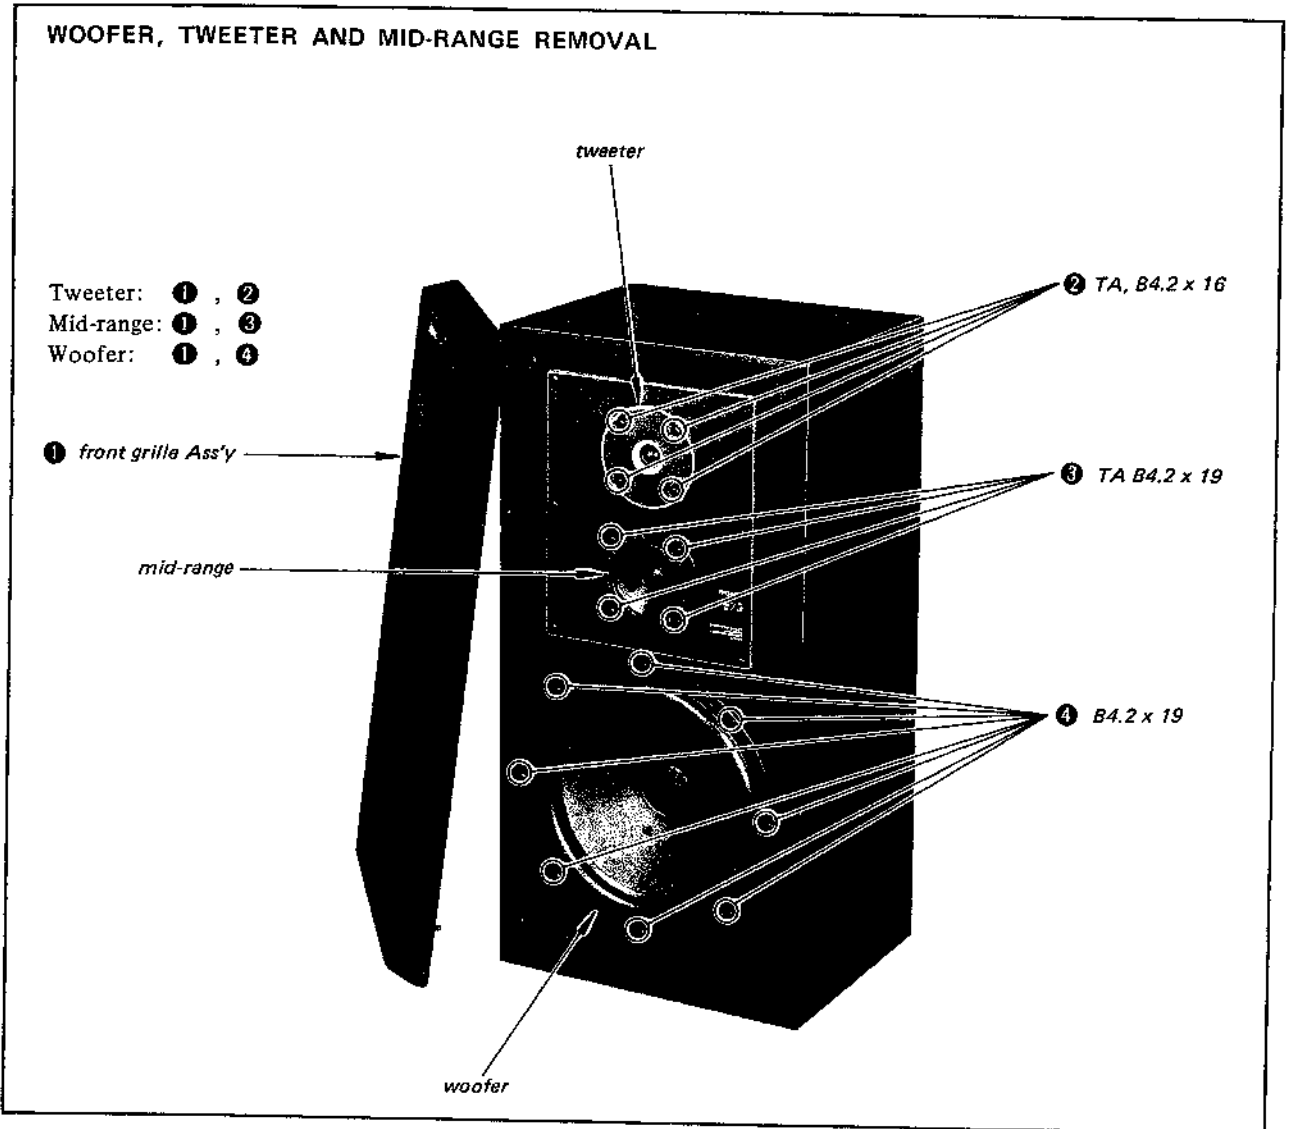


REPAIR FOR BROKEN MOUNTING PINS

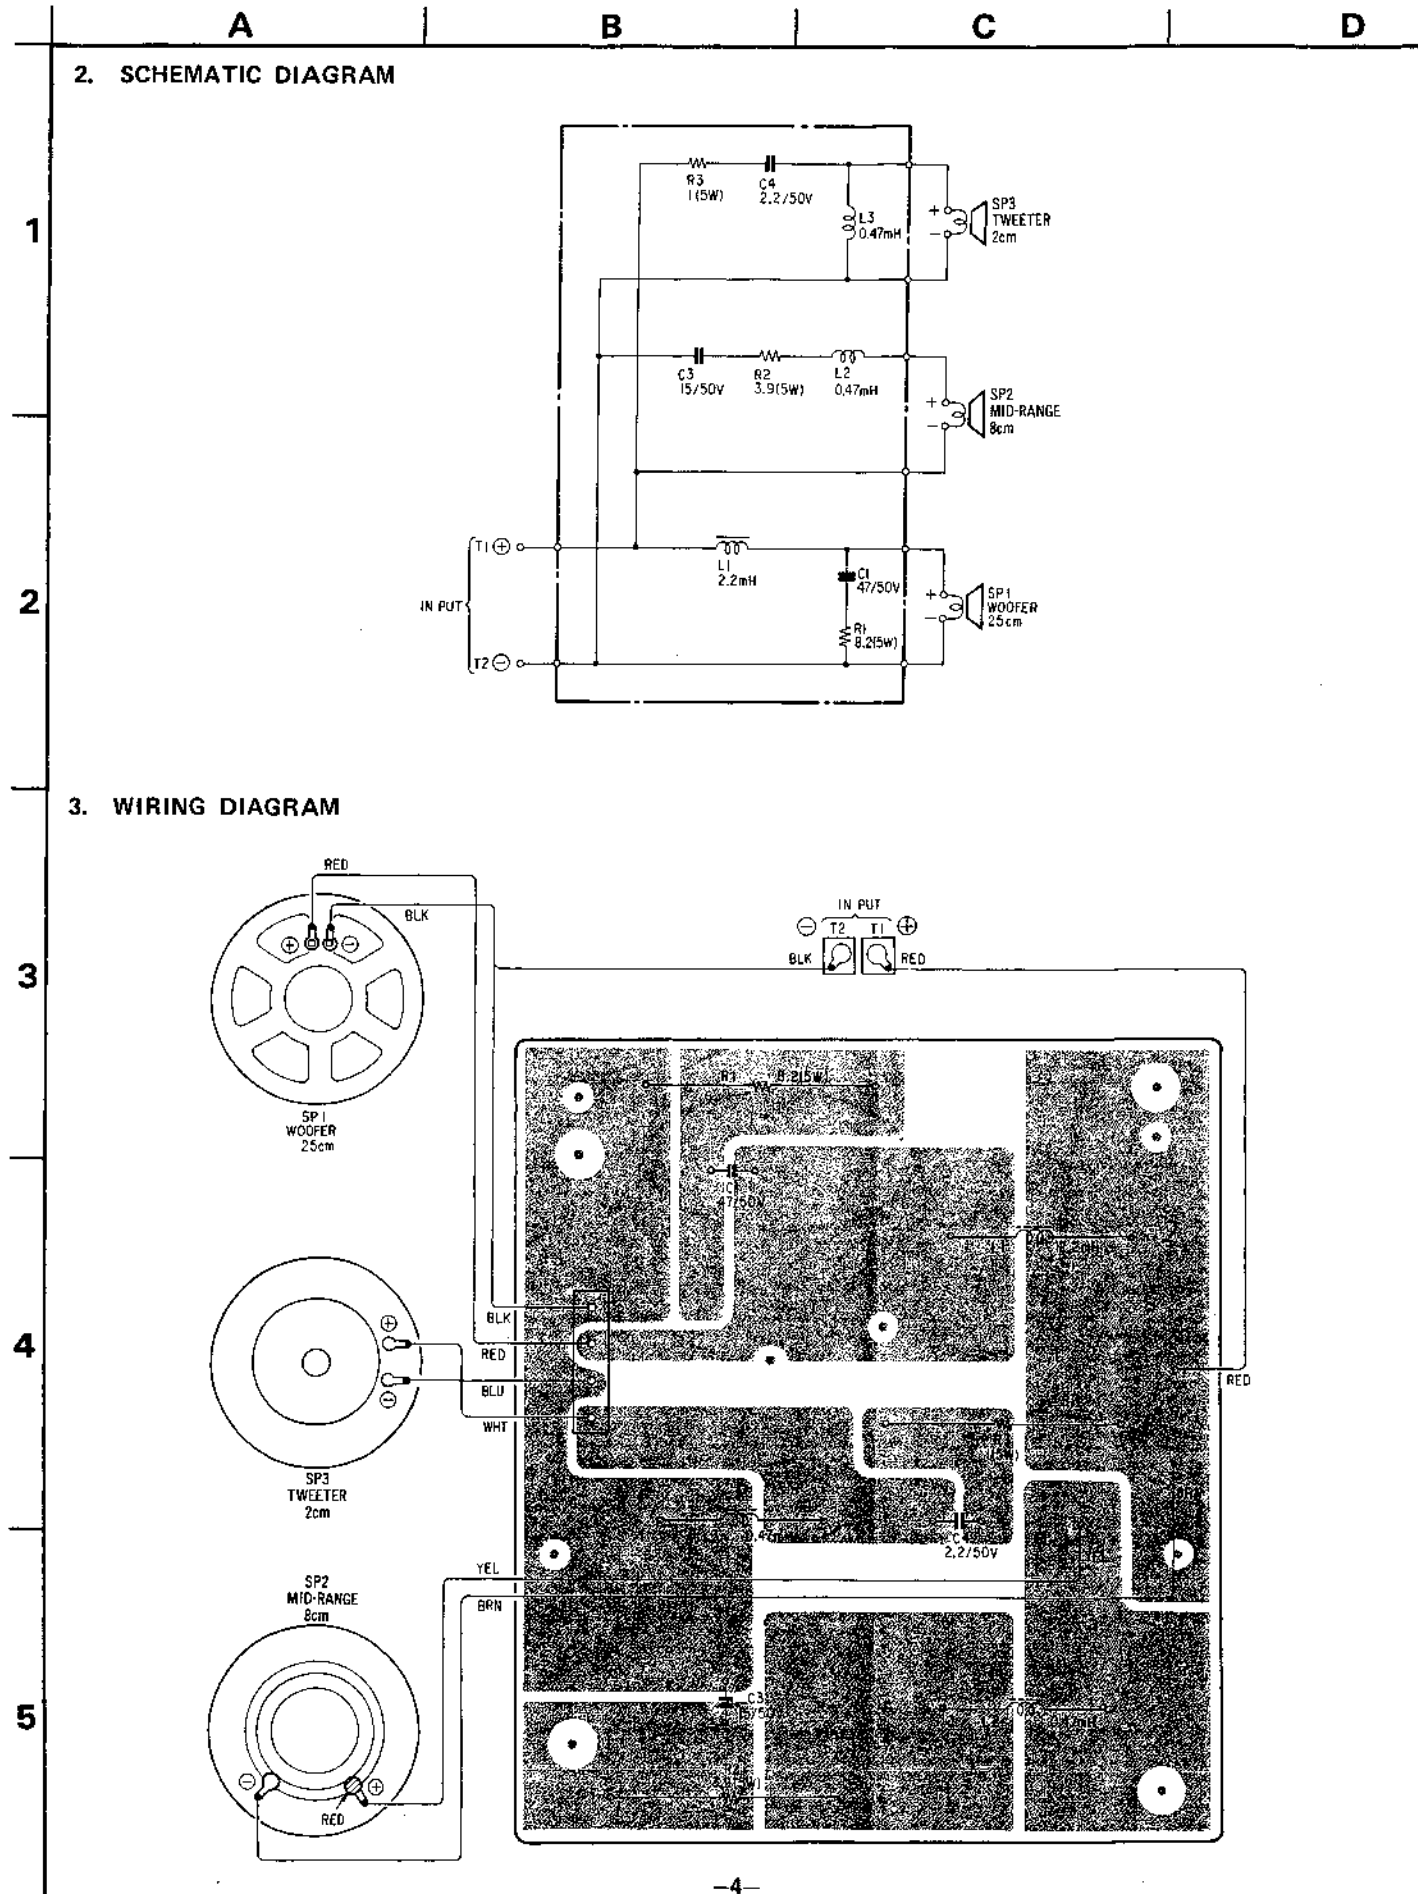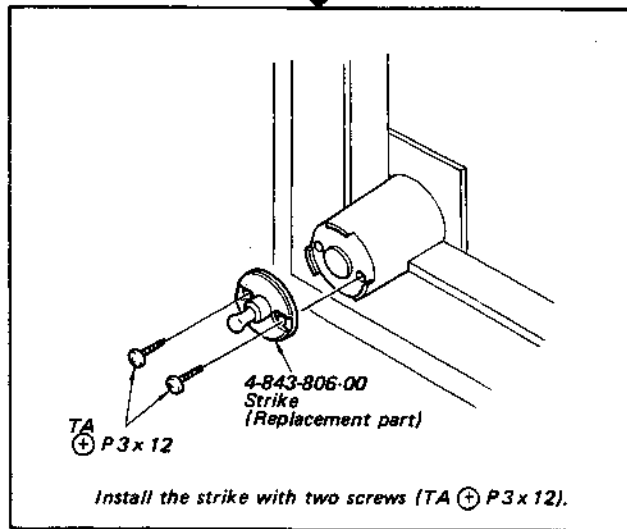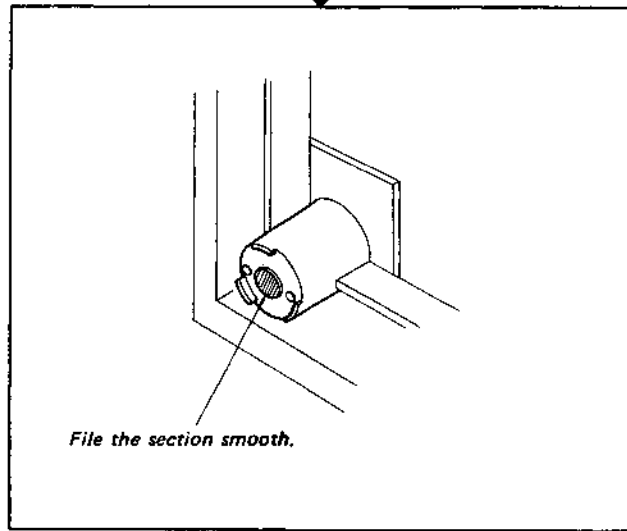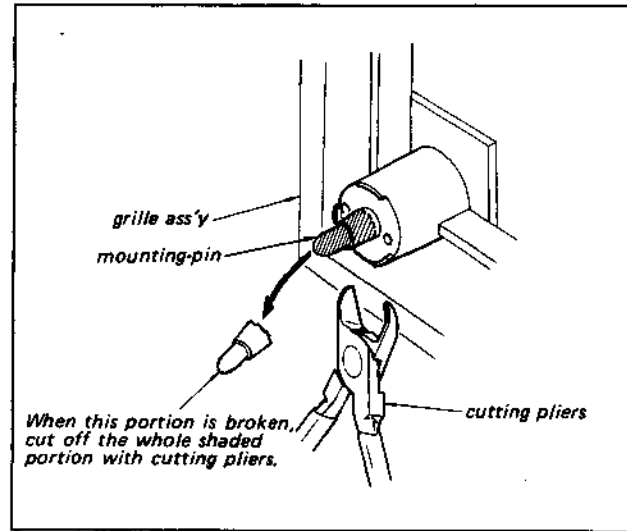

4. EXPLODED VIEW

• All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head

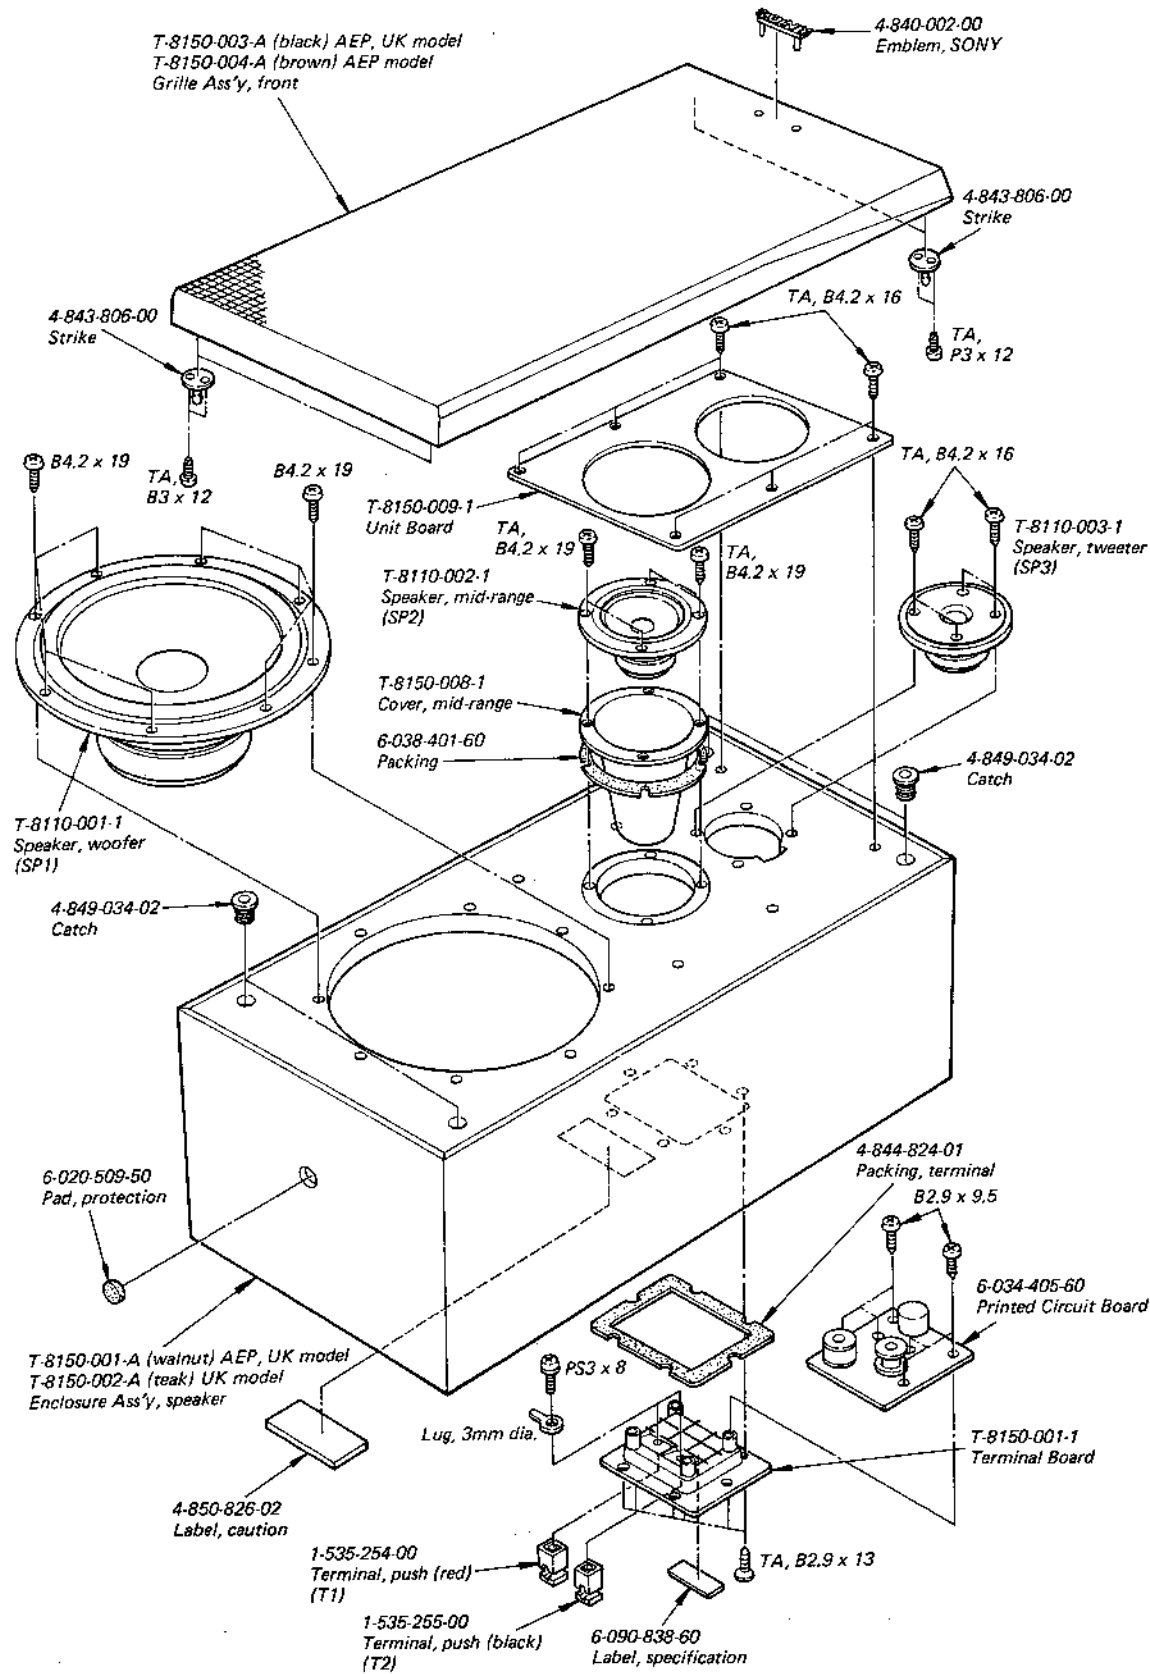

5. ELECTRICAL PARTS LIST

Ref. No.	Part No.	Description
C1	6-054-705-20	Capacitor, electrolytic 47 μ F, 50V (nonpolarized)
C3	6-054-704-10	Capacitor, electrolytic 15 μ F, 50V (nonpolarized)
C4	6-054-705-30	Capacitor, electrolytic 2.2 μ F, 50V (nonpolarized)
L1	6-062-206-80	Network Coil, 2.2mH
L2	6-062-206-90	Network Coil, 0.47mH
L3	6-062-207-00	Network Coil, 0.47mH
R1	6-060-002-30	Resistor, 8.2 Ω , 5W, wirewound
R2	6-060-024-20	Resistor, 3.9 Ω , 5W, wirewound
R3	6-060-024-30	Resistor, 1 Ω , 5W, wirewound
SP1	T-8110-001-1	Speaker, woofer 25cm
SP2	T-8110-002-1	Speaker, mid-range 8cm
SP3	T-8110-003-1	Speaker, tweeter 2cm
T1	1-535-254-00	Terminal, push (red)
T2	1-535-255-00	Terminal, push (black)
	6-026-515-50	Cord, speaker
	6-034-405-60	Printed Circuit Board

ACCESSORIES AND PACKING MATERIALS

Part No. Description

T-8150-010-1	Manual, instruction
T-8150-011-1	Bag, plastic
T-8150-012-1	Cushion
T-8150-015-1	Carton
6-020-502-50	Pad, felt